

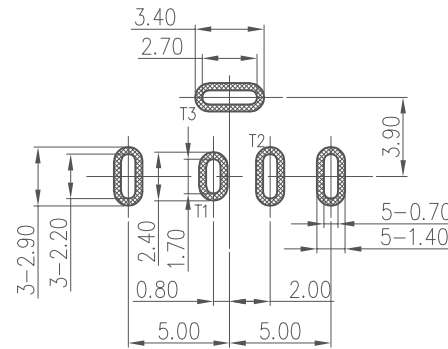

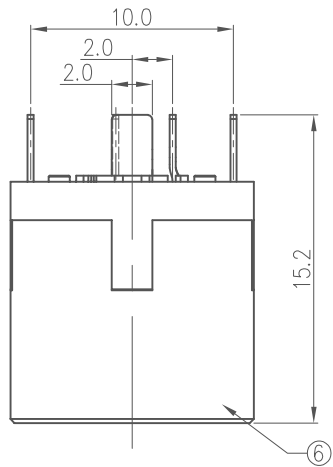
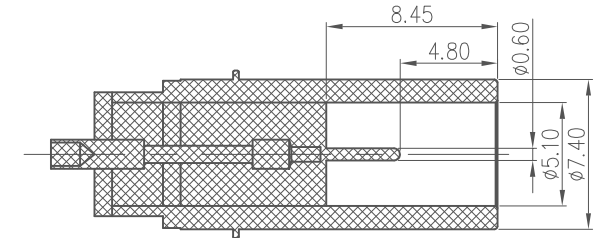
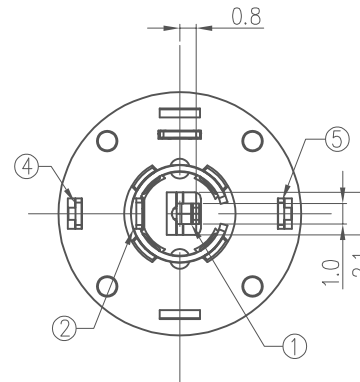
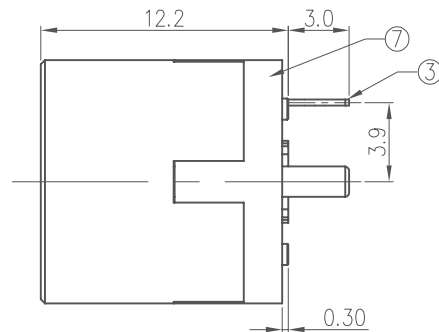




RECOMMENDED P.C.B LAYOUT
TOP VIEW TOLERANCE: $\pm 0.05\text{mm}$

- NOTES:
- ELECTCAL CHARACTERISTICS:
 - 1-CONTACT CURRENT RATING: 10A.
 - 1-2.CONTACT VOLTAGE RATING: 12V DC.
 - 1-3.CONTACT RESISTANCE: 100 MILLIOHMS MAX.
 - 1-4.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC.
 - 1-5.INSULATION RESISTANCE: 100 MEGOHMS MIN.AT DC 500V.
 - MECHANICAL CHARACTERISTICS:
 - 2-1.DURABILITY: 5000 CYCLES.
 - 2-2.INSERTION AND EXTRACTION FORCE: 3N~30N.
 - ENVIRENMENT CHARACTERISTICS:
 - 3-1.OPERATING TEMPERATURE: $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$
 - 3-2.HUMIDTY: 45~85% RH.



RECOMMEND DC MATE PLUG

UNLESS OTHERWISE
SPECIFIED TOLERANCES

XGB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONI CS CO., LTD.

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	± 0.50	X.	$\pm 2^{\circ}$
X.X	± 0.30	X.X	$\pm 1^{\circ}$
X.XX	± 0.20	X.XX	
X.XXX	± 0.10	X.XXX	

3RD ANGLE PROJECTION

UNIT:
mm

DESIGN:	GAO. PENG 2018.11.15	PART NAME: DC POWER JACK
CHECK:		
APPROVED	HE. LONG. FEI 2018.11.15	PART NO. XB-DC-740060-1317-20000H
		SHEET: 1/1 REV.: A1
		DRAWING NO

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------