

A

B





C

D


E

F


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A	—	NEW RELEASE	李润	2015.03.10

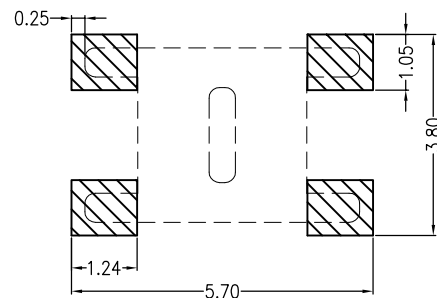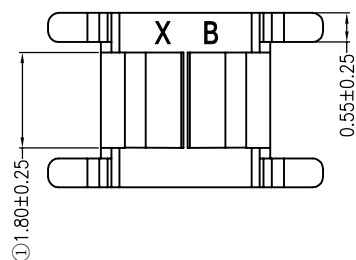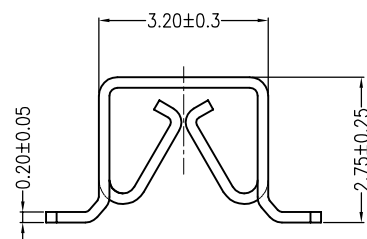

Board Layout

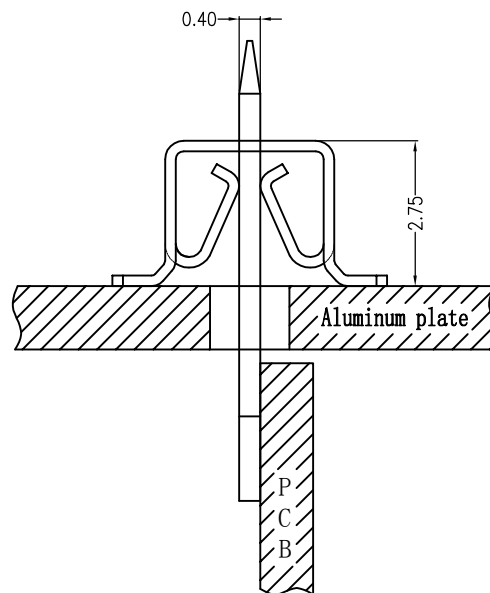

Assembly Layout



主要技术参数 Main Specifications

线 数 (Poles): 01
接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
绝缘电阻 (Insulation resistance): $\geq 800\text{M}\Omega$
额定电压 (Rated voltage): 250 V AC DC
额定电流 (Rated current): 1.0A AC DC
耐 电 压 (Withstand Voltage): 1500V AC/minute
温度范围 (Temperature Range): $-45^{\circ}\text{C} \sim +125^{\circ}\text{C}$

ORDER INFORMATION:

XB-L032-01-T2CB-R

PART No.

No. FOR CIRCUITS:

01

PLASTIC MATERIAL:

T2C=PBR (BEIGE)


PACKAGING:

R=REEL

P=PE

PLATING:

B=MATTE Sn

C							
B							
A	CONTACT		1 PCS	Brass	Ni-plated		
ITEM	COMPONENT		Q'TY	MATERIAL	FINISH		
东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO.,LTD						TITLE: - -	
.X±0.35		X.±	USE: CUSTOMER		PART NO.:		
.XX±0.25		.X±	APPD: 邵敬和		L032-01-T2CB-R		
.XXX±0.15		.XX±	CHKD:		DWG NO.:		
--		--	田峰		GCCP-0056		
		UNITS: mm	DR: 蒋建银		SCALE 1 : 1	SHEET 1 / 1	