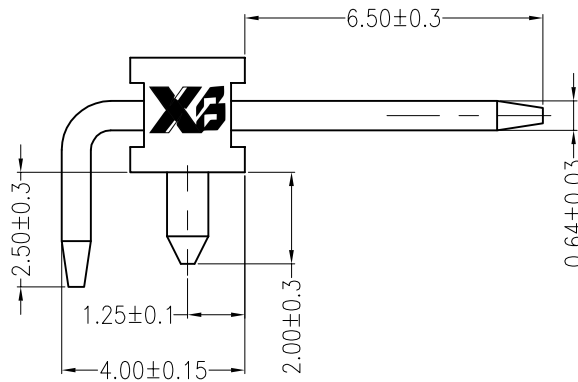
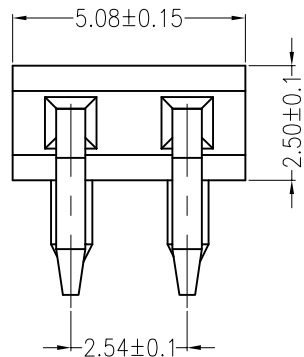




主要技术参数 Main Specifications

线 数 (Poles): 02 to 06
接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$
额定电压 (Rated voltage): 125V AC DC
额定电流 (Rated current): 1.0A AC DC
耐 电 压 (Withstand Voltage): 1500V AC/minute
温度范围 (Temperature Range): $-40^\circ\text{C} \sim +120^\circ\text{C}$


ORDER INFORMATION:

XB-L039A-02-F2MB-P

PART No. _____
No. FOR CIRCUITS: _____
PLASTIC MATERIAL: _____
F2M=LCP (BEIGE)
PACKAGING: P=PE
PLATING: B=MATTE Sn

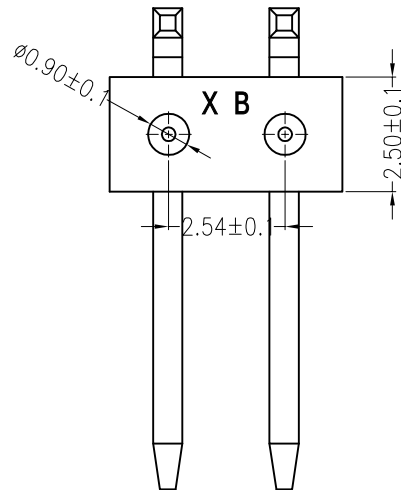

Board Layout

C					
B	CONTACT		2 PCS	Brass	Sn-plated
A	PEDESTAL		1 PCS	LCP	UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT		Q'TY	MATERIAL	FINISH
 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD TITLE: - 2.54mmPITCH 90°WAFER DIP TYPE					
X.±0.5	X.±5°	USE: CUSTOMER		PART NO.:	
.X±0.3	.X±2°			L039A-02-F2MB-P	
.XX±0.25	.XX±1°	APPD: 邵敬和		DWG NO.:	
--	--	CHKD: 田 峰		GCCP-0102	
	UNITS: mm	DR: 吴丹平		SCALE 1 : 1	SHEET 1 / 1