

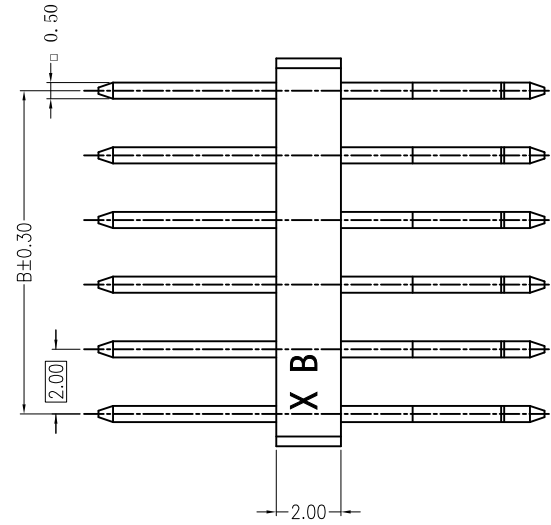


REV	DESCRIPTION	DESIGN	DATE
A	NEW RELEASE	Chenzhiming	2021/08/25

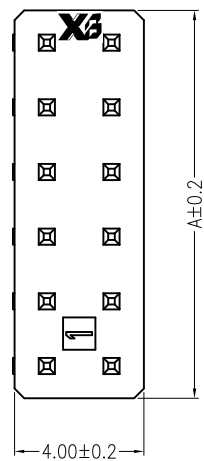


Specifications:

Contact resistance:  $\leq 60\text{m}\Omega$   
 Insulation resistance:  $\geq 100\text{M}\Omega$   
 Rated voltage: 275V AC DC  
 Rated current: 1.0A AC DC  
 Withstand Voltage: 500V AC/minute  
 Temperature Range:  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$   
 Housing: LCP UL94V-0, Natural (Beige)  
 Contacts: Brass/Matte Sn-plated

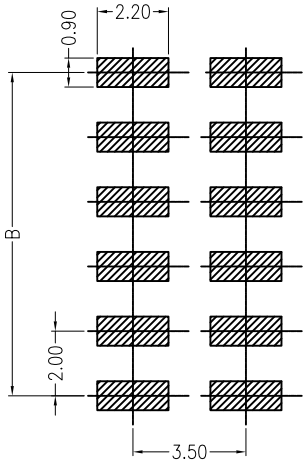

RECOMMENDED PCB LAYOUT  
 TOLERANCE  $\pm 0.05$

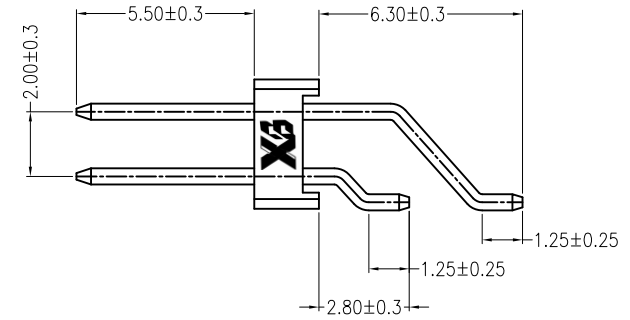

ORDER INFORMATION:

**XB- L2004AWR-2\*\*-F8MB2-R-2**

PART No.:	XB- L2004AWR-2**-F8MB2-R-2	SPECIAL CODE:	2=5.50*6.30
No.OF CIRCUITS:	202~208	PACKAGING:	P=PE
PLASTIC MATERIAL:	F8M=LCP	Metal code:	2=BRASS
		PLATING:	B=MATTE Sn

PIN.	DIM A	DIM B
2*2	4.0	2.0
2*3	6.0	4.0
2*4	8.0	6.0
2*5	10.0	8.0
2*6	12.0	10.0
2*7	14.0	12.0
2*8	16.0	14.0

**XB** 东莞市溪榜电子有限公司  
 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD

GENERAL TOLERANCE		USE:
X. $\pm 0.50$	X. $\pm 5^{\circ}$	CUSTOMER
X.X $\pm 0.30$	X.X $\pm 2^{\circ}$	APPD: Shaojinghe
X.XX $\pm 0.20$	X.XX $\pm 1^{\circ}$	CHKD: Jiangjianyin
UNITS: mm		DR: Chenzhiming

TITLE:	
2.0mm pitch 90°Wafe SMT type	
PART NO.:	
L2004AWR-2**-F8MB2-R-2	
DWG NO.:	
SCALE	SHEET
1 : 1	1 / 1