


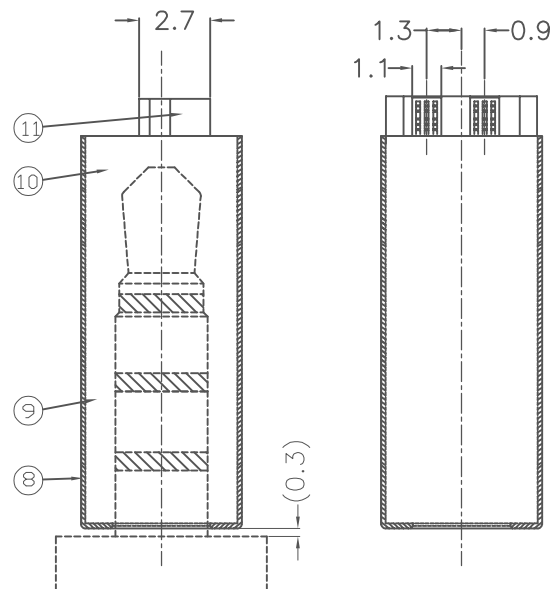
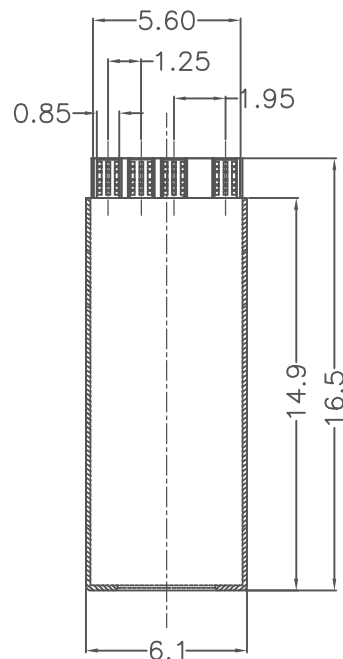



Lead free

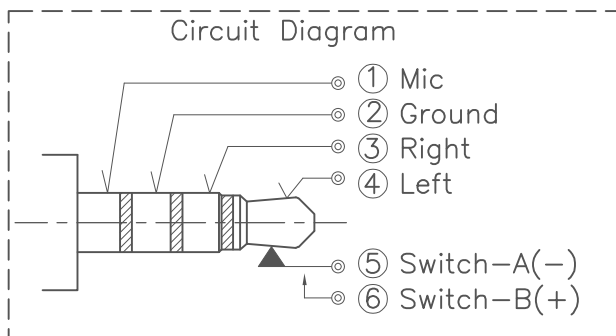

Notes:

- 1.Current Rating: 12V&1A max.
- 2.Contact Resistance: 30mOhms Max.(initial)
- 3.Insulation Resistance: 100M Ohms Min./250V DC
- 4.Dielectric Withstanding Voltage: 250V AC/1Minute
- 5.Mating Force: 35N Max, Withdrawal Force: 3N Min.
- 6.Durability: 5,000 Cycles
- 7.Operating Temperature:-25°C to+85°C

12	Separator	Thermoplastics	White or Black
11	Cover2		
10	Cover1		
9	Housing		
8	Shell	Copper Alloy	Ni Plated Overall.
7	Spring Contact		Sn On Solder&Contact Area;Ni Plated Overall.
6	Switch B Contact		
5	Switch A Contact		
4	Left Contact		G/F On Contact Area Sn On Solder Tails Ni Plated Overall.
3	Right Contact		
2	Mic Contact		
1	Ground Contact		
Item	Name	Material	Description

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	
X.XXX	±0.10	X.XXX	



UNIT:
mm

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DESIGN: GAO.PENG
2021.10.28

CHECK:

APPROVED: HE.LONG.FEI
2021.10.28

PART NAME:
Ø3.5 AUDIO JACK

PART NO.:
XB-PJ-03506-0931-00000H
SHEET: 1/1 REV.: A1

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------