



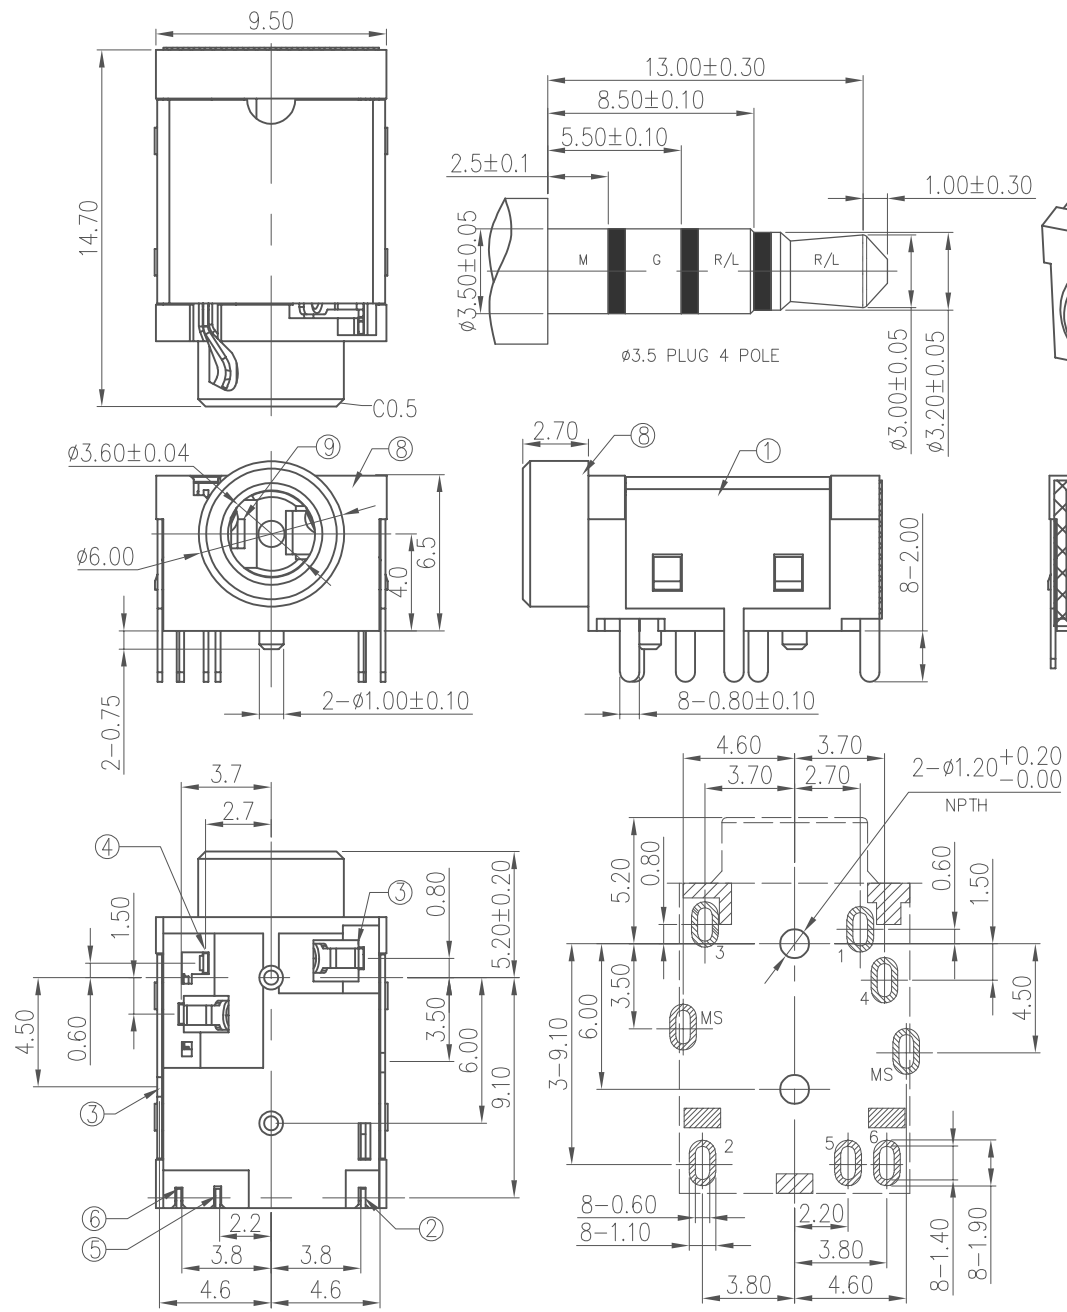

- NOTES:
- 1.ELECTCAL CHARACTERISTICS:
 - 1-1.CONTACT CURRENT RATING: 1A.
 - 1-2.CONTACT VOLTAGE RATING: 12V DC.
 - 1-3.CONTACT RESISTANCE: 30 MILLIOHMS MAX.
 - 1-4.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC.
 - 1-5.INSULATION RESISTANCE: 100 MEGOHMS MIN.AT DC 500V.
 - 2.MECHANICAL CHARACTERISTICS:
 - 2-1.DURABILITY: 5000 CYCLES.
 - 2-2.INSERTION AND EXTRACTION FORCE: 3N~30N.
 - 3.ENVIRENMENT CHARACTERISTICS:
 - 3-1.OPERATING TEMPERATURE.-25℃~+85℃
 - 3-2.HUMIDITY: 45~85% RH.



9	SEPARATE		1	PA9T	BLACK
8	HOUSING		1	PA9T	BLACK
7	Mylar		1		
6	TERMINAL-6		1	Copper alloy	Au(G/F*) FLASH ON CONTACT AREA, MATTE TIN 80u" ON SOLDER TAIL,ALL OVER NI 50" MIN. PLATING
5	TERMINAL-5		1	Copper alloy	
4	TERMINAL-1		1	Copper alloy	
3	TERMINAL-3,4		1	Copper alloy	
2	TERMINAL-2		1	Copper alloy	
1	SHELL		1	Spcc	Ni-PLATED
No.	PART NAME	TER'No.	Q'ty	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFED TOLERANCES

DECIMALS:	ANGLES:	DESIGN:	GAO. PENG	PART NAME:
DIM	TOL	DIM	TOL	Φ3.5 PHONE JACK
X.	±0.50	X.	±2°	
X.X	±0.30	X.X	±1°	
X.XX	±0.20	X.XX		
X.XXX	±0.10	X.XXX		

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

2023.5.31

HE. LONG. FEI


2023.5.31

PART NO.
XB-PJ03506-1152-00000H

SHEET: 1/1 REV.: A1

DRAWING NO

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE	UNIT:	APPROVED	DRAWING NO
7					mm		

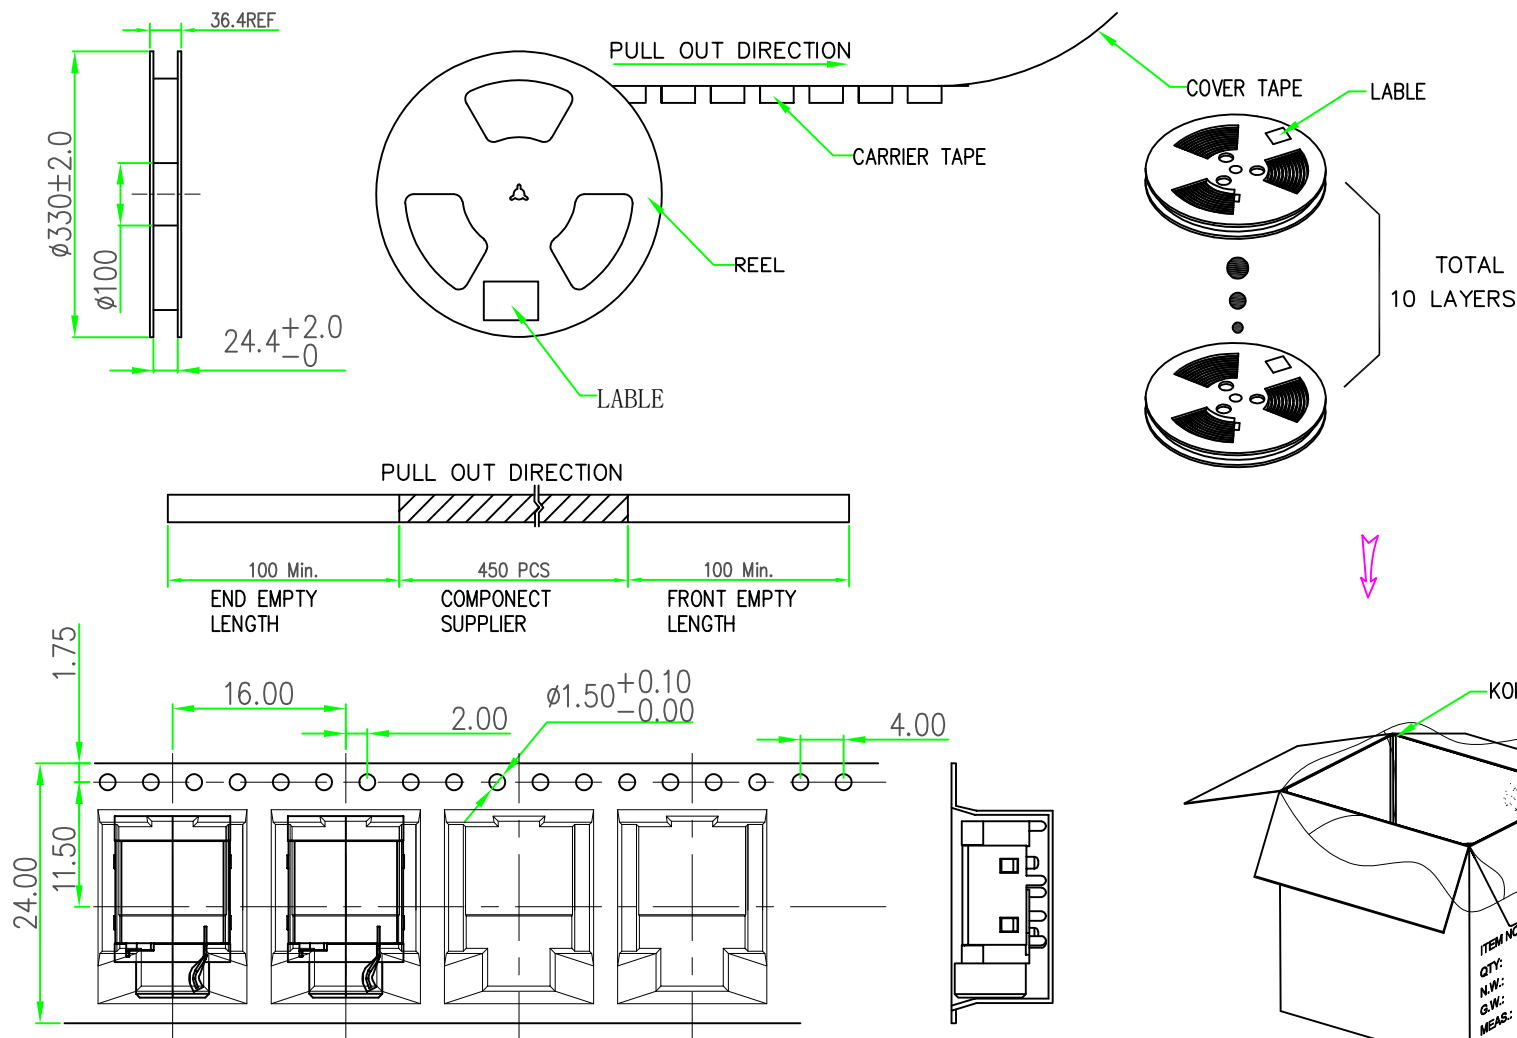

NOTES:

1. PRIMARY PACKING: 450PCS UNITS/REEL;
2. OUTER CARTON PACKING: 10 REELS/CARTON(4500PCS/CARTON)
3. PEELING RESISTANCE: 0.1N~1.3N(10gf~130gf).
4. PEELING ANGLE: 165°~180°
5. PEELING SPEED: 300mm/minutes.

UNLESS OTHERWISE SPECIFIED TOLERANCES				XGB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
DECIMALS:		ANGLES:		DESIGN:	GAO. PENG	PART NAME:	
DIM	TOL	DIM	TOL	CHECK:	2023.5.31	Φ3.5 PHONE JACK	
X.	±0.50	X.	±2°			-包装图	
X.X	±0.30	X.X	±1°				
X.XX	±0.20	X.XX	—				
X.XXX	±0.10	X.XXX	—	APPROVED	HE. LONG. FEI	PART NO.	
 3RD ANGLE PROJECTION				UNIT: mm	2023.5.31	XB-PJ03506-1152-00000H	
						SHEET: 1/1 REV.: A1	
						DRAWING NO	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------