

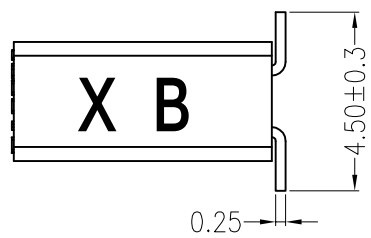
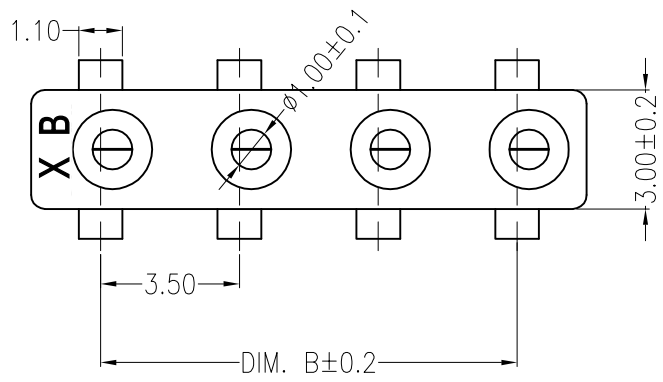


A B C D

REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	吴丹平	2017.05.15

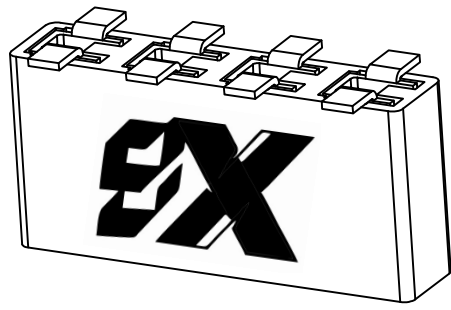

Circuit	Dimensions (mm)	
	DIM. A	DIM. B
L013-01	3.50	
L013-02	7.00	
L013-03	10.50	7.50
L013-04	14.00	10.50

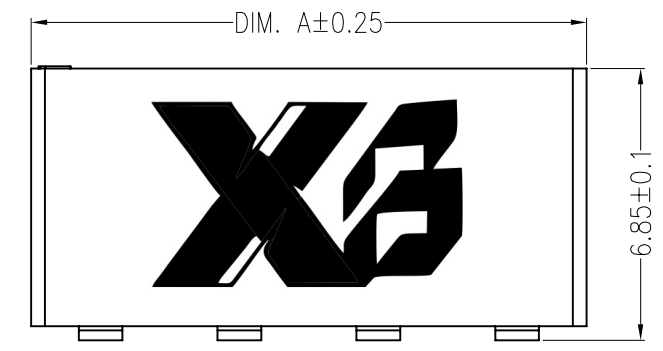


主要技术参数 Main Specifications

线数 (Poles): 01 to 04P
额定电阻 (Contact resistance): $\leq 20m\Omega$
绝缘电阻 (Insulation resistance): $\geq 800M\Omega$
额定电压 (Rated voltage): 250 V AC DC
额定电流 (Rated current): 1.0A AC DC
耐电压 (Withstand Voltage): 1000V AC/minute
温度范围 (Temperature Range): -25℃ ~ +105℃
ORDER INFORMATION:

XB-L013-**-F2MB-R

PART No.		PACKAGING:
No. FOR CIRCUITS:		R=REEL
01~04		P=PE
PLASTIC MATERIAL:		PLATING:
F2M=LCP (BEIGE)		B=MATTE Sn

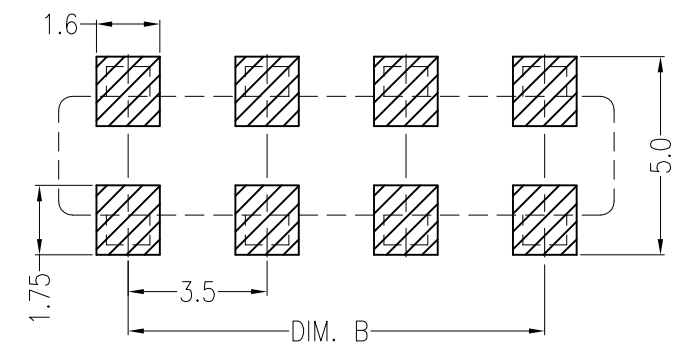

Board Layout

C					
B	CONTACT		1~4 PCS	PhosphorBronze	MATTE Sn-plated
A	PEDESTAL		1 PCS	LCP	UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT		Q'TY	MATERIAL	FINISH
 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD TITLE: L013-**-1R 3.5mmPITCH 180°WAFER SMT TYPE					
X.±0.5		X.±5°	USE:		PART NO.:
.X±0.3		.X±2°	CUSTOMER		L013-**-F2MB-R
.XX±0.25		.XX±1°	APPD: 邵敬和		DWG NO.:
--		--	CHKD: 田峰		GCCP-0026
		UNITS: mm	DR: 吴丹平		SCALE 1 : 1
					SHEET 1 / 1