
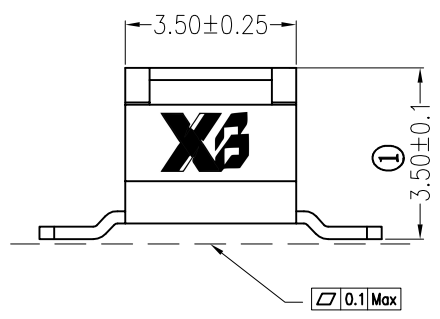

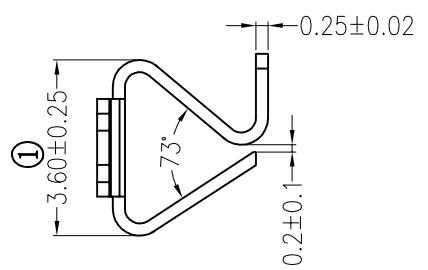
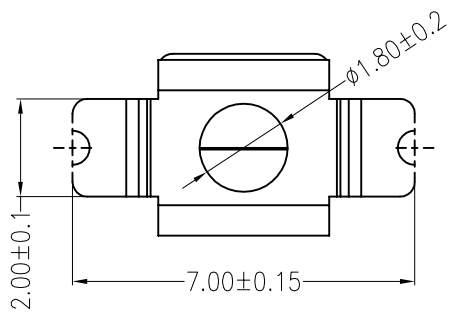


Board Layout

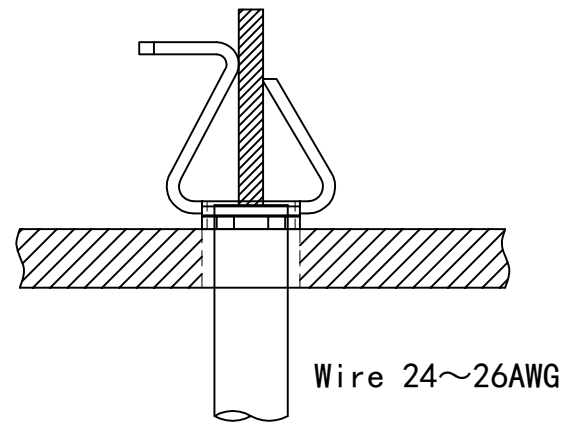

Assembly Layout

E		F	
REV	DESCRIPTION	DESIGN	DATE
A	Release	-	-
-	-	-	-

主要技术参数 Main Specifications

线 数 (Poles): 01
接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
绝缘电阻 (Insulation resistance):
额定电压 (Rated voltage): 250 V AC DC
额定电流 (Rated current): 1.0A AC DC
耐 电 压 (Withstand Voltage):
温度范围 (Temperature Range)

ORDER INFORMATION:

XB-L042-01-T2CB-R			
PART No.		PACKAGING:	
No. FOR CIRCUITS:		R=REEL	
01		P=PE	
PLASTIC MATERIAL:		PLATING:	
T2C=PBR (BEIGE)		B=MATTE Sn	

C				
B				
A	CONTACT	1 PCS	PhosphorBronze	MATTE Sn -plated
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
X.±0.35		X.±	USE:	PART NO.: L042-01-T2CB-R
.X±0.25		.X±	MANUFACTURE	
.XX±0.15		.XX±	APPD: 邵敬和	DWG NO.: GCCP-0070
--		--	CHKD: 田峰	
UNITS: mm		DR: 蒋建银	SCALE 1 : 1	SHEET 1 / 1

东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE:
-