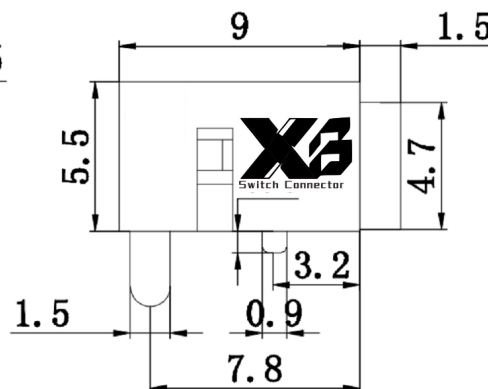
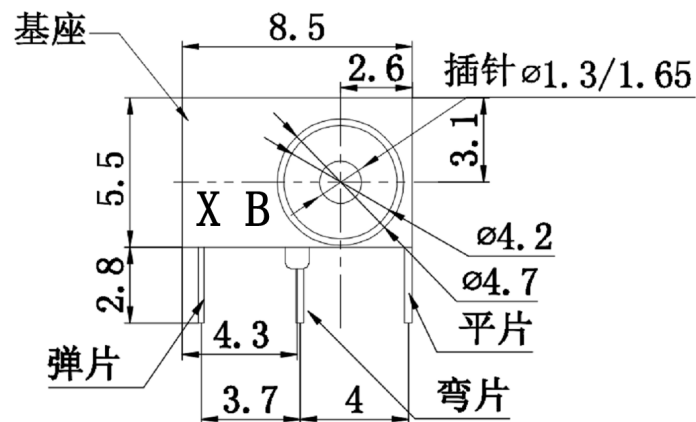


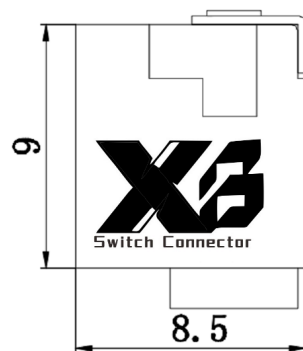
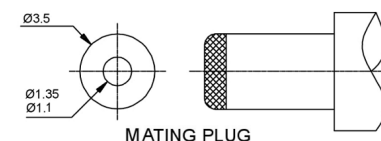
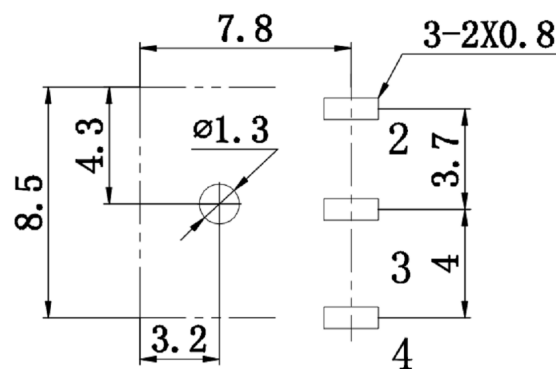
CAD FILE:


ROHS



SPECIFICATION

1. Rating : DC 12V 30V , 1.0A 3.0A
2. Contact resistance : $\leq 30\text{m}\Omega$
3. Insulation resistance : $\geq 100\text{M}\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-20N
6. life test : 5,000 cycles

线路板开孔尺寸
P.C.B LAYOUT

SCHEMATIC	
CENTER PIN	$\phi 1.0\text{ mm}$
	$\phi 1.3\text{ mm}$

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : $\pm 0.1\text{mm}$	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : $\pm 0.2\text{mm}$	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : DC Power Jack			UNIT : mm	DRWG NO.: XB-DC-0060T
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-DC-0060T			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					