


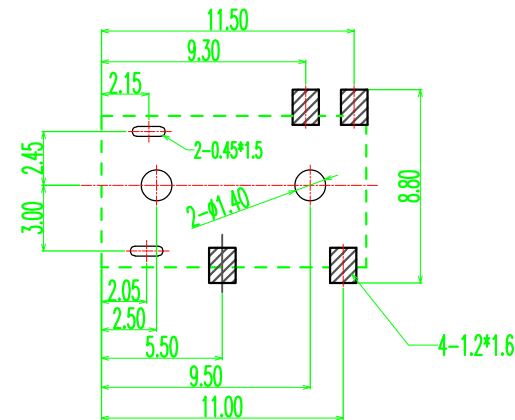

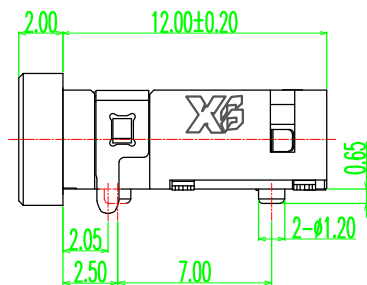
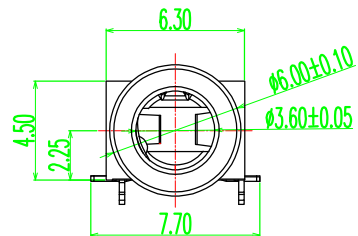


3D VIEW



P.C.B LAYOUT
TOP VIEW



SCHEMATIC

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50 mΩ MAX.;
3. INSULATION RESISTANCE: 1000Ω MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;

8	SLEEVE	1	BRASS;NICKEL UNDER PLATING OVERALL,GOLD PLATING ON CONTACT AREA
7	TERMINAL 6#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL,GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA
6	TERMINAL 5#	1	
5	TERMINAL 4#	1	
4	TERMINAL 3#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL,GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA
3	TERMINAL 2#	1	
2	TERMINAL 1#	1	PHOSPHOR BRONZE; THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.
1	HOUSING	1	PPA COLOR BLACK
ITEM	NAME	Q'TY	DESCRIPTION


UNLESS OTHERWISE
SPECIFIED TOLERANCES



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:		DESIGN:	Tony 2023.8.31	PART NAME: Φ3.5mm Phone Jack
DIM	TOL	DIM	TOL	CHECK:		
X.	±0.50	X.	±2°			
X.X	±0.30	X.X	±1°	APPROVED	Andy 2023.8.31	PART NO. XB-PJ-03506-1193-00000H
X.XX	±0.20	X.XX	—			SHEET: 1/1 REV.: A1
X.XXX	±0.10	X.XXX	—	DRAWING NO		
				UNIT: mm		

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------



UNIT:
mm