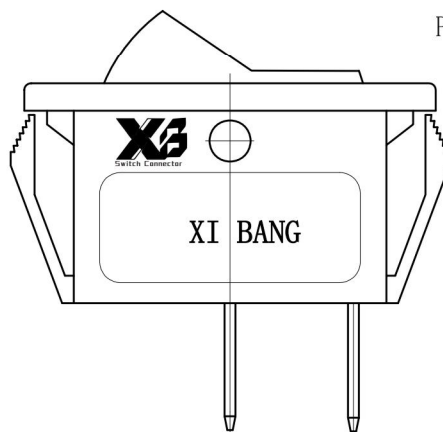
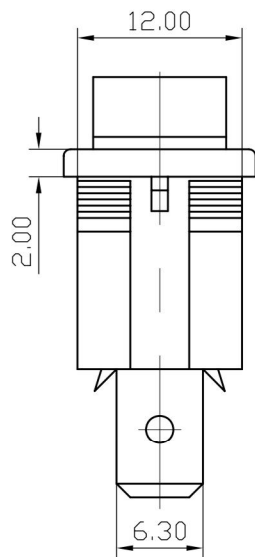
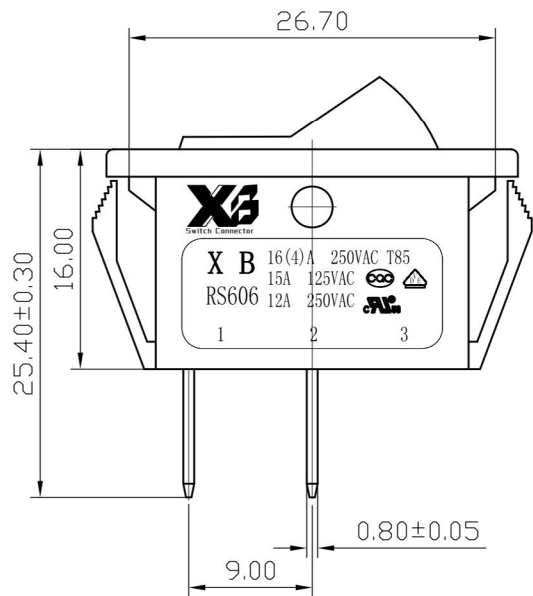


PANEL CUT-OUT		
Z	Y	X
0.70~1.25	11.90~12.10	28.9~29.1
1.25~2.00	11.90~12.10	29.1~29.2
2.00~3.00	11.90~12.10	29.2~29.3

NOTES:

1. Rating:

CQC/VDE/UL cUL

16(4)A 250V AC T85

16A 125V AC

12A 250V AC

2. Circuit Diagram: 2P ON-OFF

3. Terminal Strength: $\geq 80N$



4. Electrical life: ≥ 10000 cycles

5. Withstand Voltage: Withstand Voltage: 1500VAC 1min
Terminals to Button: 3000VAC 1min
Leakage Current: 1mA

6. Current resistance: $\leq 50m\Omega$ (initial)

7. Insulation resistance: $\geq 100M\Omega$

8. Body Material: NYLON 66 94V-0~2

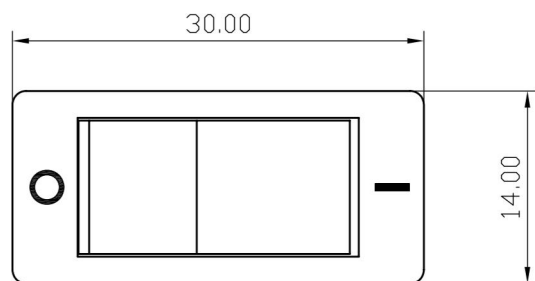

7	基座	1	环保阻燃PA66		
6	弯端	1	0.8mm黄铜带 +复合银触点	镀锡	
5	中端	1	0.8mm黄铜带	镀锡	
4	接触桥	1	0.8mm黄铜带 +复合银触点	镀银	
3	套管	1	0.3mm拉伸钢	镀镍	
2	弹簧	1	∅0.45弹簧钢丝	发黑	
1	按钮	1	环保阻燃PA66		
序号	名称	数量	材料	处理	备注

A4				普通公差：		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.							
A3				COMMON TOLERANCE :									
A2				UP TO 5	±0.20	单 位 UNIT	mm	投 影 PROJECTED		品 名 PRODUCT NAME	跷板开关	比 例 SCALE	Free
A1				ABOVE 5 TO 30	±0.30	绘 图 DRAWN BY	GAO. PENG	核 对 CHECKED BY	HE. LONG. FEI	型 号 MODEL NO.	RS606		
REV.	DATE	REVISION DESCRIPTION	ISSUE	ABOVE 30	±0.50	日 期 DATE	2023. 3. 8	核 准 APPROVAL BY	LAI. HAI. JIE	图 号 DWG NO.	RS606A1-1010152BBB		
				ANGULAR	±5°								