





CAD FILE:

Waterproof IP67

ROHS

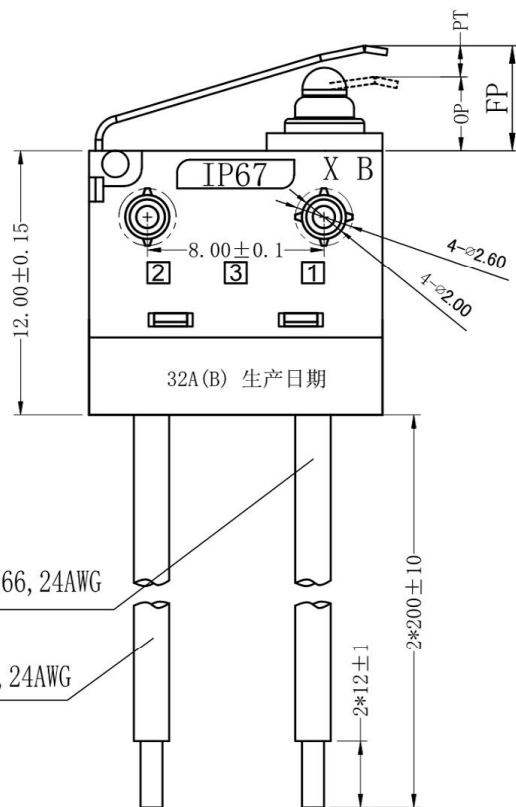

绞锡

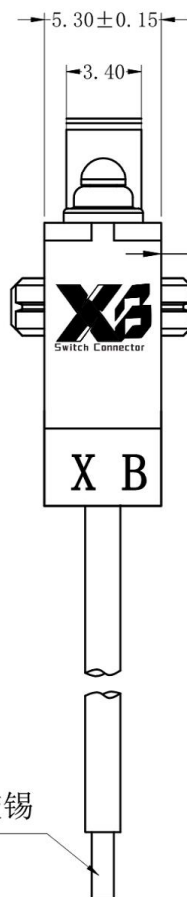

Circuit Diagram

说明:

- 1、黑线-蓝线之间电阻:开关自由状态时为3520 Ω，被按压时为220 Ω；
- 2、COM: 黑线; NO: 蓝线
- 3、RC, R4电阻精度为1%
- 4、图示位置激光打印: 32A(B) 和生产日期

ELECTRICAL DATA

RATING	OPERATING LIFE
3A 12VDC	100,000 CYCLES
0.1A 48VDC 125/250VAC	100,000 CYCLES

MECHANICAL LIFE	500,000 CYCLES
GAP TYPE	MICRO
OPERATING TEMP	-40℃ ~ +85℃
WATERPROOF	IP67

CHARACTERISTICS

OPERATING FORCE (OF):	200gf Max.
RELEASE FORCE (RF):	30gf Min.
OPERATING POSITION:	6.7±0.5mm.
PRE TRAVEL:	2.5mm Max.
DIFFERENTIAL TRAVEL:	0.5mm Max.
FREE POSITION:	8.7mm Max.

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : XB Micro Switch			UNIT : mm	DRWG NO.: XB-FSK-H3-D9-1B01W1-32
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-FSK-H3-D9-1B01W1-32			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH	DONG GUAN XI BANG ELECTRONICS CO., LTD.				