


IPX7

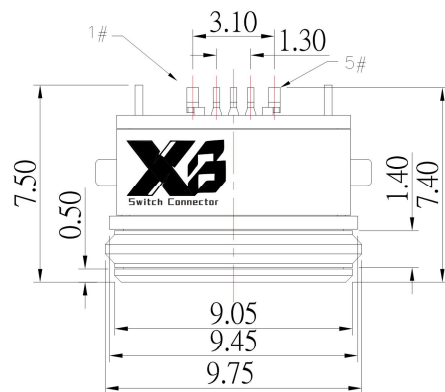


MRUSB-5B-WP19-x-S165






鍍層厚度:

Blank : 1u"
2 : 15u"
3 : 30u"

Contact Number	Signal Name	Remarks
1#	VBUS	Power
2#	D-	Date-
3#	D+	Date+
4#	ID	Reserve or Gound
5#	GND	Gound

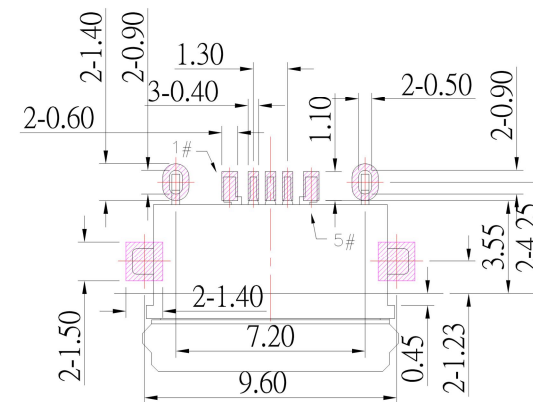

P.C.B LAYOUT MOUNTING PATTERN

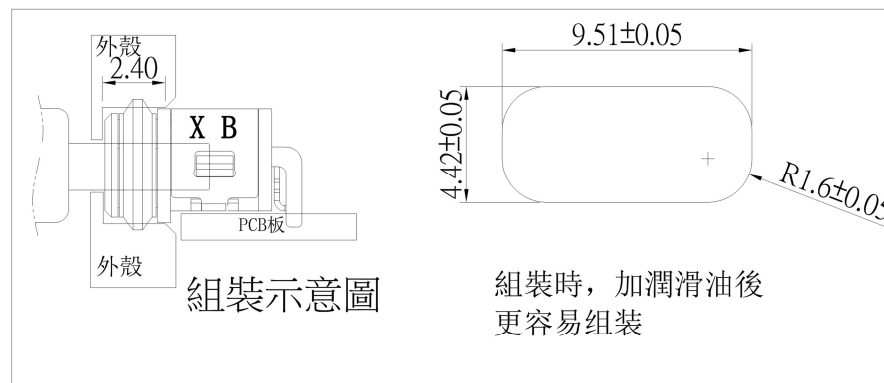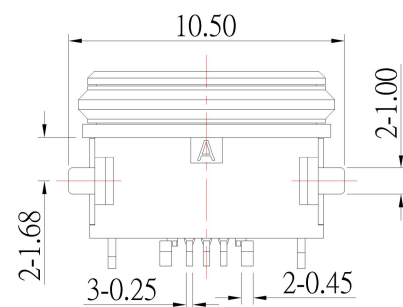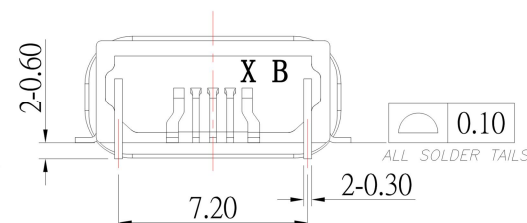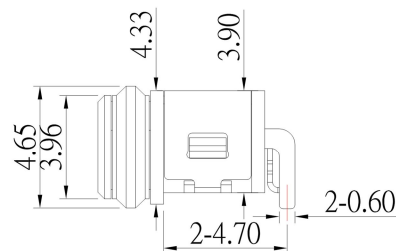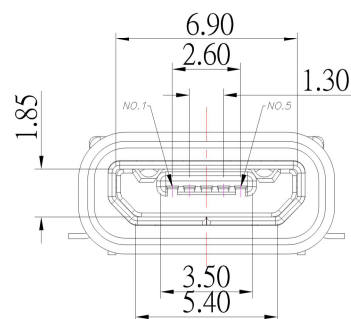

組裝時, 加潤滑油後
更容易組裝

NOTES:

MATERIAL:

1.1 HOUSING: PA9T

1.2 CONTACT: PHOSPHOR BRONZE

1.3 SHELL: SUS

FINISH:

2.1 CONTACT: PLATED GOLD IN MATING AREA ;

GOLD PLATED ON SOLDER BALLS ;

NICKEL UNDER PLATED OVERALL.

2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER

3.SPECIFICATION:

3.1 RATING: 1.5A

3.2 DIELECTRIC WITHSSTANDING VOLTAGE: 500 VAC

3.3 CONTACT RESISTANCE: 30 mΩ MAX.

3.4 INSULATION RESISTANCE: 1000 MΩ MIN.



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	11/04/21
CHECKED BY:	DATE
Jacky Chen	11/04/21
APPROVED BY:	DATE
Tony Kao	11/04/21

MAT'L		TITLE	CONNECTOR
FINISH		MODLE	MICRO USB 5P F B TYPE H 3.9 防水型 IPX7
SCALE	1 : 1	DWG NO.	MRUSB-5B-WP19-x-S165
SHEET NO.	1 of 2	PART NO.	MRUSB-5B-WP19-x-S165

SIZE
A4
VER
R