
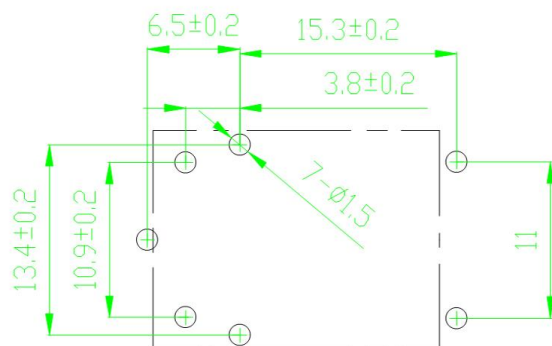
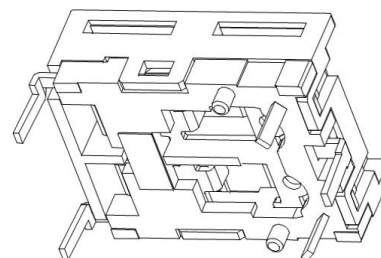
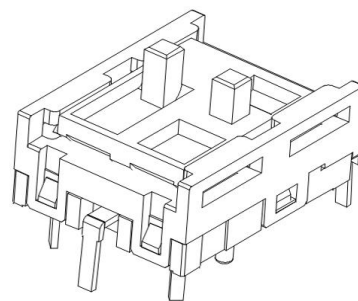
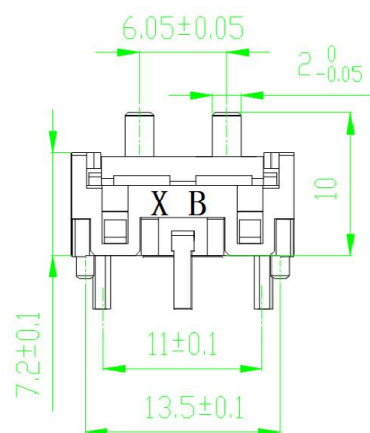


CAD FILE:

ROHS

I 0 II

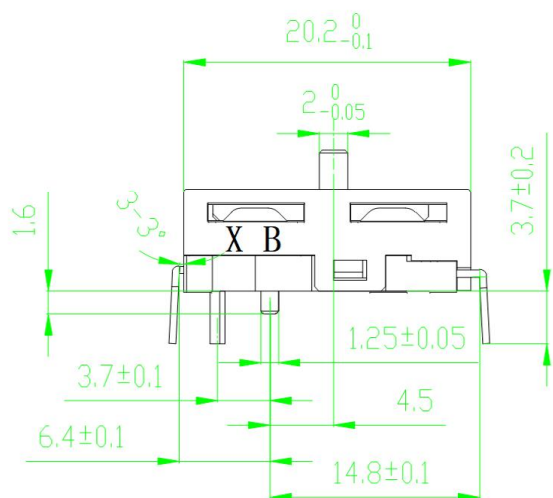

建议孔位尺寸

技术要求:

- 开关动作灵活, 无卡滞现象;
- 开关耐压:
 - 同极间(断开时)1000V AC(50Hz)1min;
 - 极与壳体之间2000V AC(50Hz)1min;
- 工作额定值:DC 12V 5A;
- 接触电阻 $\leq 20\text{m}\Omega$;
- 电寿命 ≥ 30000 ;

触点编号	①	②	③	④	⑤
档 位					
0		○		○	
I	○	○		○	○
II	○		○		○

档 位	动作行程	极限行程	动作力
○ → I	0.9-1.5 (mm)	2.0	3±1N
○ → II	0.9-1.5 (mm)	2.0	3±1N

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : $\pm 0.1\text{mm}$	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : $\pm 0.2\text{mm}$	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : MICRO SWITCH			UNIT : mm	DRWG NO.: XB-P01-F2
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-P01-F2			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH	DONG GUAN XI BANG ELECTRONICS CO., LTD.				