

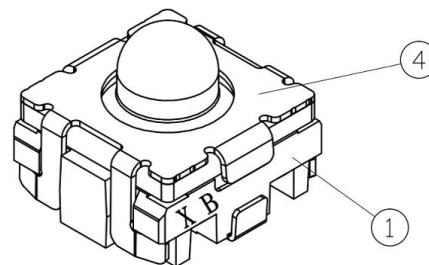





CAD FILE:

ROHS




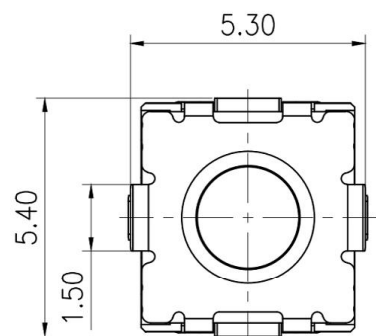


(3D VIEW)

IP67




CIRCUIT DIAGRAM

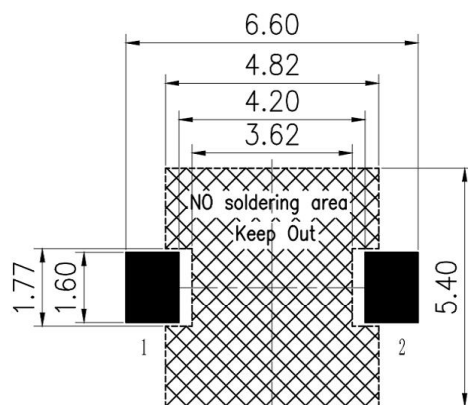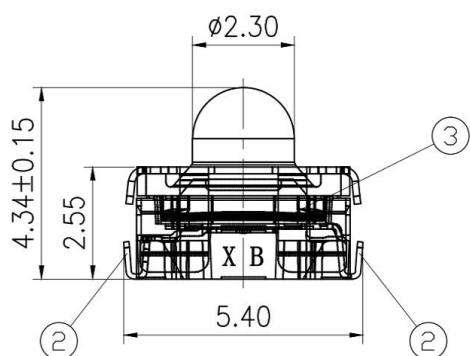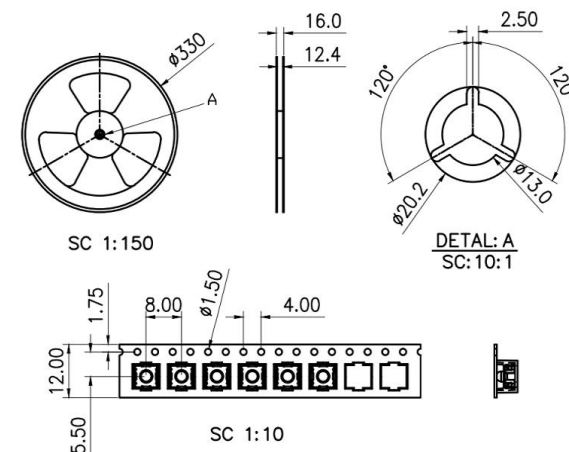Recommended PAD Layout ± 0.05
Recommended solder thickness $T=0.10\pm 0.01$ 

1. RATING:DC 16V, 80mA Max
DC 1V, 10uA Min;
2. OPERATING FORCE:300±50gf;
3. TRAVEL:0.90±0.3mm;
4. LIFE:250,000cycles;
5. PACKAGE:2200Pcs/Reel;
6. WATER/DUST PROOF GRADE:IP67

编带的透明带剥离强度标准:30~100gf



5	BOTTOM	1	SILICON RUBBER	RED
4	SHELL	1	SUS	N/A
3	CONTACT	2	SUS	Ag-Plate
2	TERMINAL	2	PHOSPHOR BRONZE	Ag-Plate
1	HOUSING	1	LCP	BLACK
ITEM	PART NAME	Q'TY	MATERIAL	FINISH

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Tact Switch			UNIT : mm	DRWG NO.: XB-TS-5453V
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-TS-5453V			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					