
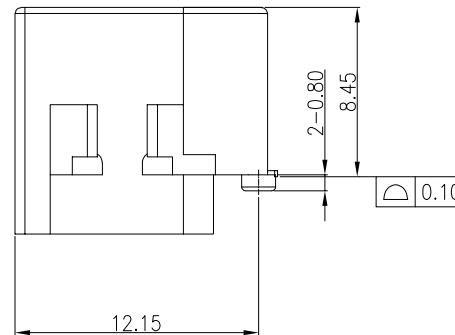
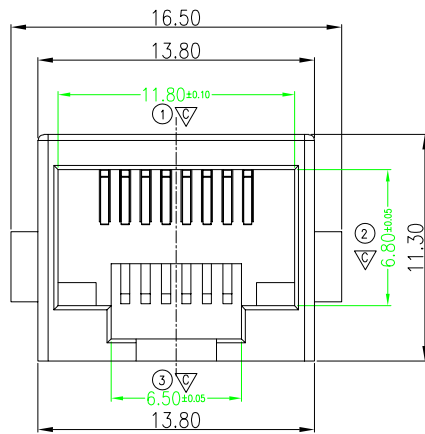
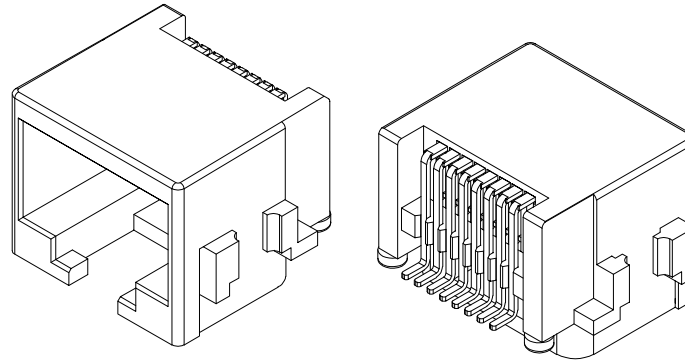


REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE	LXHXH	2018/01/18
B	更换图框	易维民	2021/06/11

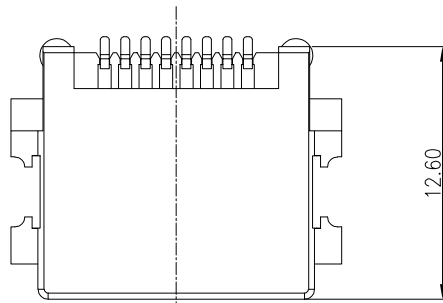

说明:

1. 材质:

胶芯: LCP, UL94V-0; COLOR: BLACK

端子: C5191

外壳: C2680

2. 电镀说明:

端子: 接触区域镀金G.F

焊锡区域镀锡

全部区域镍底

外壳: 表面镀镍

3. 性能说明:

1) 电压: 150V AC RMS.

2) 额定电流: 1.5A.


3) 接触电阻: 40mΩ Max.

4) 绝缘电阻: 500MΩ MIN.

5) 绝缘耐压: 1000V AC.

6) 工作温度: -40° C TO +80° C.

7) 耐久性: 500 Mating Cycles MIN.


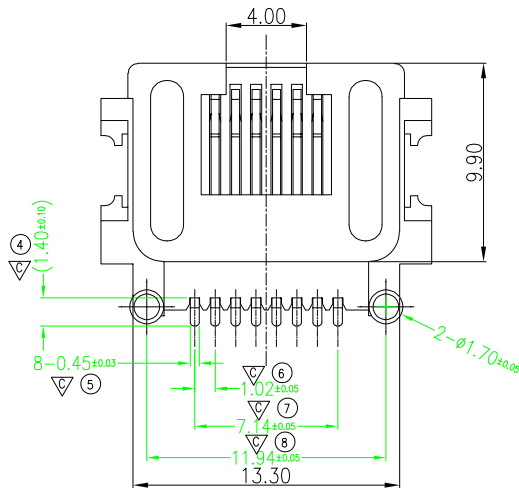


TOLERANCE UNSPECIFIED	
.0	±0.30
.00	±0.20
.000	±0.10
X.°	±1.00°
ASSEMBLY DRAWING	

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.


TITLE: RJ45沉板8.45mm全塑 SMT
成品图

DRAWN DATE	He. Long. Fei 2021/06/11	SIZE: A4	UNIT: mm.	PART. NO: XB-RJ05-00L1-01	REV.: B PATH 1/2
CHECKED DATE	Long. Liu. Ting 2021/06/11	SCALE: 1:1	PROJECTION		
APPROVED DATE	Lai. Hai. Jie 2021/06/11	DWG PATH	C00-0000-0021		

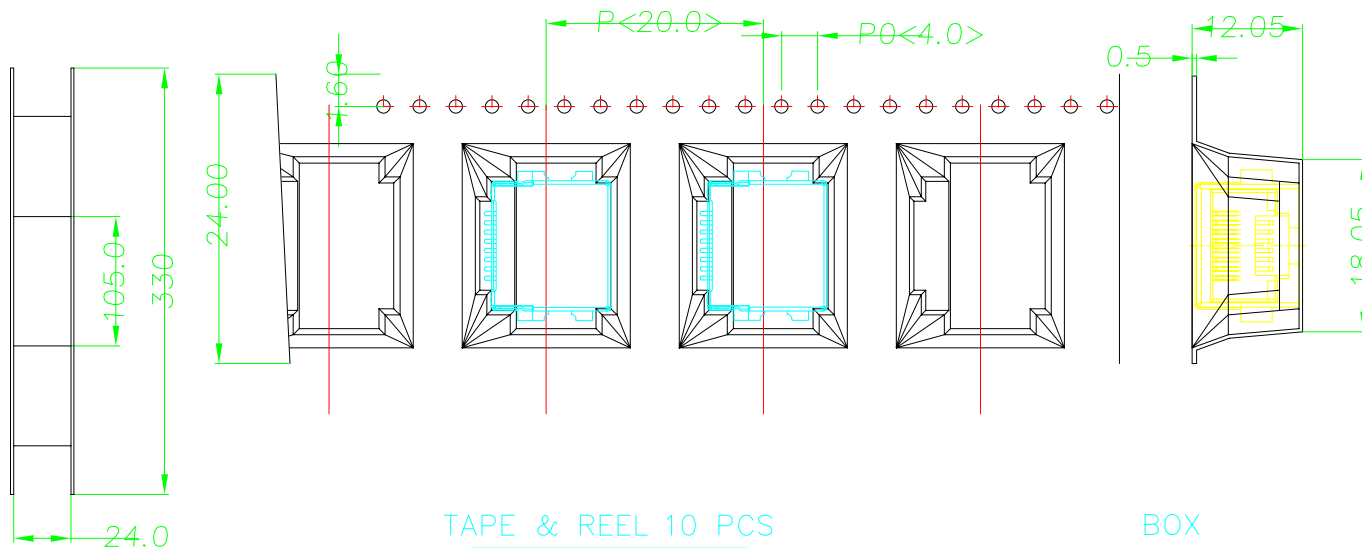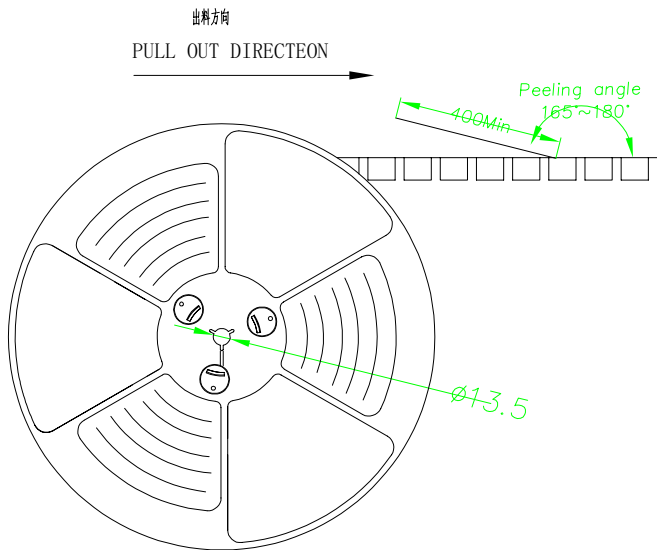

NOTES

1.帶子引導長度
LEAD TAPE LENGTH
出料方向
PULL OUT DIRECTEON

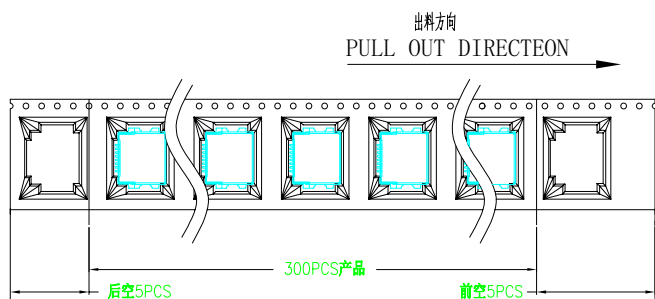

2.上帶 剝力力為: 0.1~1.3N(10.2gf~130gf)
PEELING OFF FORCE OF TOP TAPE:0.1~1.3N(10.2gf~130gf)
出貨 運輸過程中一定注意:
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT:
卷帶在運輸過程中不能散開
PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION

TAPE & REEL 10 PCS

1 REEL
= 300 PCS

BOX

DIMENSIONS:
33.5X33.5X30.5

LABEL

1 CARTON
=10 REELS
=3000 PCS

TOLERANCE UNSPECIFIED		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
.0	±0.30				
.00	±0.20				
.000	±0.10				
X.°	±1.00°				
ASSEMBLY DRAWING		TITLE: RJ45沉板8.45mm全塑 SMT 成品包装图—载带			
DRAWN DATE	He. Long. Fei 2021/06/11	SIZE:A4	UNIT:mm.	PART. NO:	XB-RJ0S-00L1-01
CHECKED DATE	Long. Liu. Ting 2021/06/11	SCALE: 1:1	PROJECTION	REV.: B	
APPROVED DATE	Lai. Hai. Jie 2021/06/11	DWG	PATH	C00-0000-0021	PATH 2/2