
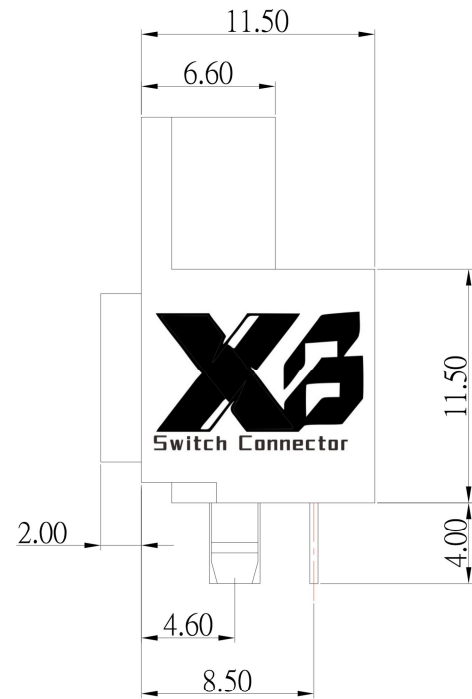
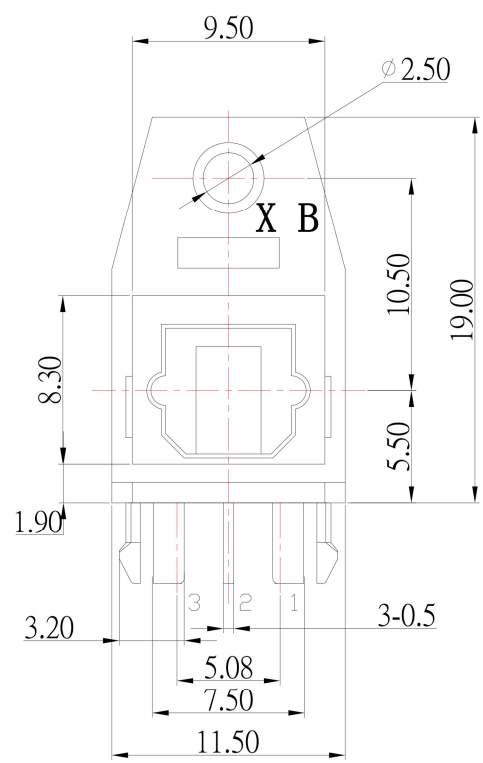
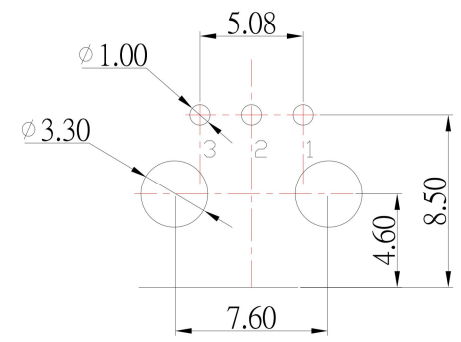


OJ-G5006B-XX3-S214



Recommended PCB Layout

SPECIFICATIONS:

- 1.DISSIPATION CURRENT: 5.0 mA
- 2.PPERATING VOLTAGE(Vcc): 2.7-5.5 V
- 3.INSERTION FORCE:4.0Max Kgs
- 4.EXTRACTION FORCE:0.6Kgs TO 4.0 Kgs
- 5.ENDURANCE:500 CYCLES
- 6.OPERATING TEMPERATURE: -25 TO +70 °C

⑥	DRIVE IC(TX UNIT)			1	13 Mbps
⑤	COIL SPRING	SUS		1	
④	GATE	PBT		1	Black
③	FRAME	PBT		1	
②	COVER	PBT		1	
①	HOUSING	PBT		1	
ITEM	DESCRIPTIONs	MATERIAL	FINISH	Q'TY	NOTE
DRAWN BY:	DATE	MAT'L	TITLE	JACK	
Jack Lu	11/25/19				
CHECKED BY:	DATE	FINISH	MODLE	OPTICAL JACK	
Jacky Chen	11/25/19				
APPROVED BY:	DATE	SCALE	DWG NO.	OJ-G5006B-XX3-S214	SIZE
Tony Kao	11/25/19	1 : 1	PART NO.	OJ-G5006B-XX3-S214	A4
		SHEET NO.	1 of 1		VER
					R2

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONI CS CO., LTD.

2	新增傳輸代碼	Jack	112519	TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S		UNITS	MM
1	更新料號	Jack	070116					
ITEM NO.	DESCRIPTION	DRAWN	DATE					