
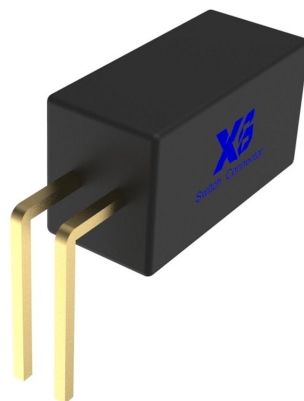
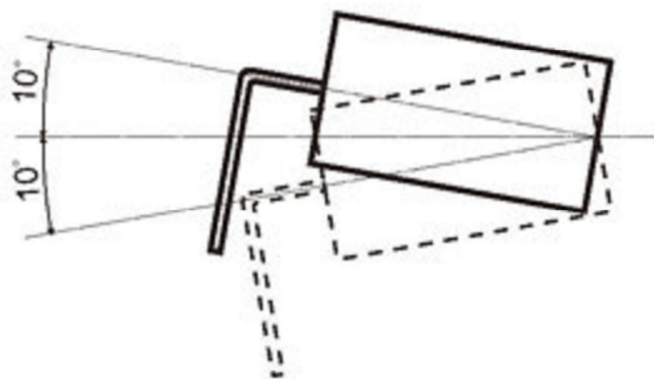
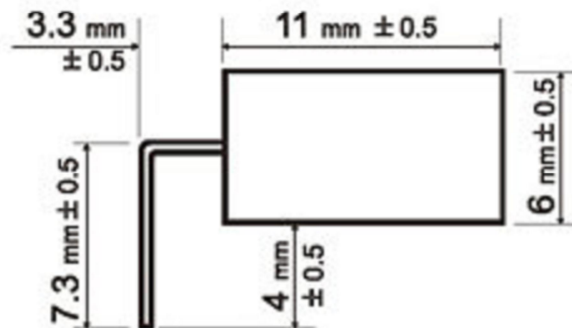


CAD FILE:

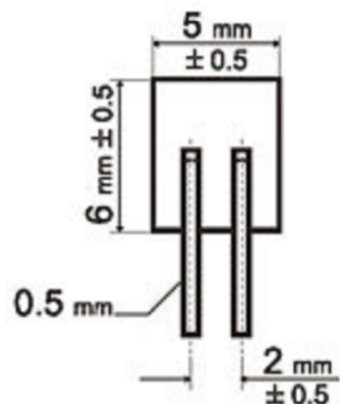

New product introduction

XB-R511L vibration switch are sensitive to trigger, and are made from environmental friendly materials. They are airtight, dustproof, waterproof, operates with a small action angle, and has a long operation life. The product is suitable for low voltages and currents. Patent protected.

Application

Game machines, toys, security systems, electrical and electronic products, personal security alarms, vibration sensors, and car alarms.

Technical Specification

1. Maximum Switch Rating : 24VDC, 6mA
2. Electrical Life : 100,000 cycles Min.
3. Contact Resistance : 0.5Ω Max.
(Measured at 45° tilt)
4. Differential Angle : 10° Max.
5. Solder Temperature : Manual soldering 350℃, 3~5 seconds.
6. Operating Temperature : -40℃~+85℃

8					TOLERANCE UNLESS SPECIFIED					
7										
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版		ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Vibration Switch			UNIT : mm	DRWG NO.: XB-R511L	
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-R511L			SCALE: 5:1	DWN.	JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			CHK'D	DONG. PANG	2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN	2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH						