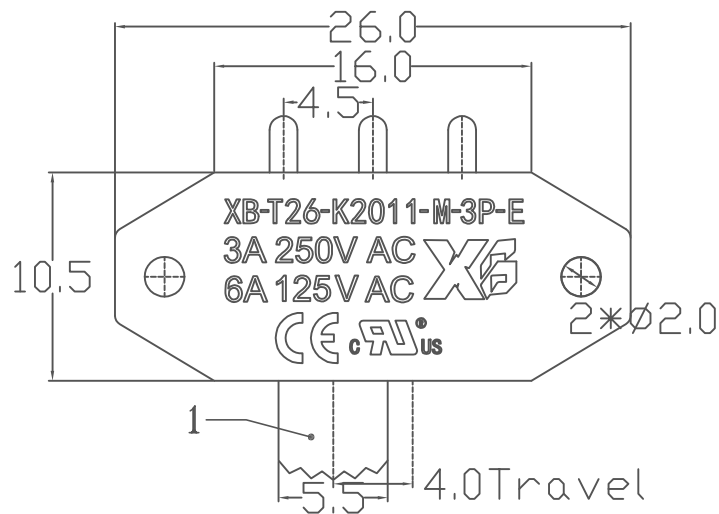


SPECIFICATIONS

Rating	3A 250V AC;6A 125 AC
FUNCTION	1P-2T
Contact Resistance	50MΩ Max
Insulation Resistance	100MΩ Min
Operating Force	400gf±100gf
Operating Life	10,000cycle

Model No	X(mm)
XB-T26-K2011-M-3P-E-G2	2mm
XB-T26-K2011-M-3P-E-G3	3mm
XB-T26-K2011-M-3P-E-G4	4mm
XB-T26-K2011-M-3P-E-G5	5mm
XB-T26-K2011-M-3P-E-G6	6mm
XB-T26-K2011-M-3P-E-G7	7mm
XB-T26-K2011-M-3P-E-G8	8mm
XB-T26-K2011-M-3P-E-G9	9mm
XB-T26-K2011-M-3P-E-G10	10mm

7	STEEL BALL	STEEL	1	NATURAL
6	SPRING	STEEL WIRE	1	NATURAL
5	CONTACT	BRASS	1	Ag PLATED
4	TERMINAL	BRASS	3	Ag PLATED
3	CASE	PA66	1	BLACK
2	COVER	PA66	1	BALCK
1	KNOB	PA66	1	BALCK
NO	PARTS	MATERIALS	Q' TY	FINISH

6	新增Rating选项		
5	更新样式		
4	更新Rating		
3	更新Rating		
2	新增SPEC		
1	更新图面		
ITEM NO.	DESCRIPTION	DRAWN	DATE

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5 ±0.2
Above 5 -15 ±0.3
Above 15 -30 ±0.4
Above 30 -60 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: PENG GAO
CHECKED BY: ZENG CHEN
APPROVED BY: ZENG CHEN
DATE: 01/29/24
DATE: 01/29/24
DATE: 01/29/24

MAT'L

FINISH

SCALE

SHEET NO.

TI'TLE

MODLE

DWG NO.

PART NO.

XB-T26-K2011-M-3P-E

XB-T26-K2011-M-3P-E

SIZE
A4
VER