

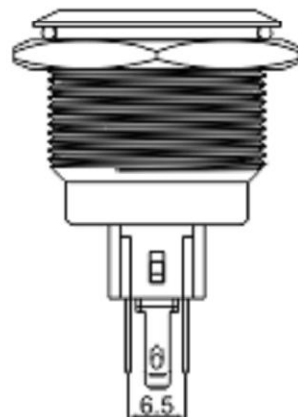
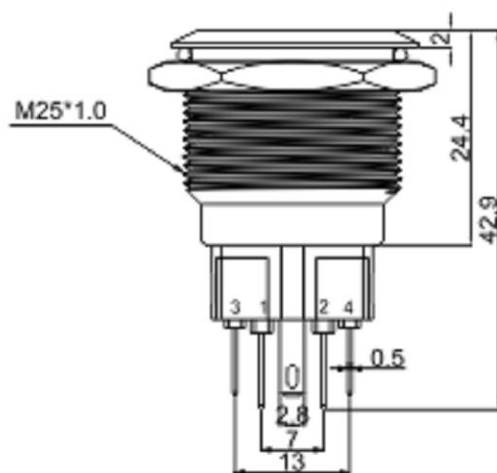
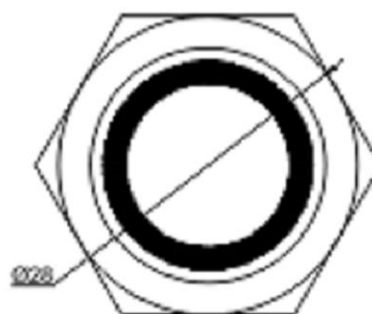


ROHS

Switch Specifications
 Rating: 5A 250VAC ;
 2A 36VDC ;
 Degree of protction:IP67;
 Contact Resistance: 50mΩ Max. ;
 Dielectric Strength:1000VAC For 1 minute ;
 Total Travel: 2.8±0.5mm ;
 Operating Force:600±200gf ;
 Mechanical Life:200,000 cycles ;
 Load Life:50,000 cycles ;
 Operating Temperation:-20° C~85° C ;
 Function: OFF-(ON)

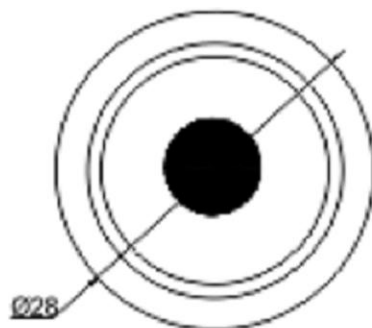

Panel Thickness: 10mm MAX.

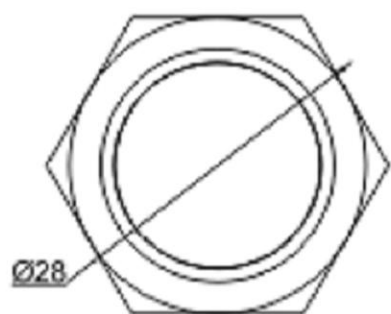

W6	白色	5.0	6.0	9.0	15
U6	蓝色	5.0	6.0	9.0	15
G6	纯绿色	5.0	6.0	9.0	15
Y6	黄色	5.0	6.0	9.0	15
R6	红色	5.0	6.0	9.0	15
W3	白色	2.8	3.0	3.4	15

U3	蓝色	2.8	3.0	3.4	15
G3	纯绿色	2.8	3.0	3.4	15
Y2	黄色	1.8	2.0	2.4	15
R2	红色	1.8	2.0	2.4	15

LED Specifications


LED 类型	双向LED灯珠（交直流通用）			U3	蓝色	2.8	3.0	3.4	15
寿 命	40000小时（参考值）			G3	纯绿色	2.8	3.0	3.4	15
额定电压	AC/DC12V	AC/DC24V	AC/DC110V	Y2	黄色	1.8	2.0	2.4	15
	AC/DC36V	AC/DC48V	AC/DC220V	R2	红色	1.8	2.0	2.4	15
额定电流	约15mA		约3mA	灯发光颜色 X Emitted color X	最小	一般	最大	额定电	
降压方式	采用3V灯，需内置电阻				顺向电压(V)			流 (mA)	

7	SPRING	STEEL WIRE	1	NATURE
6	STEEL BALL	STEEL	1	NATURE
5	BOARD	PHENOLIC RESIN	1	NATURE
4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
3	FRAME	IRON STRIP	1	Ni PLATED
2	TERMINAL	BRASS STRIP	8	Ag PLATED
1	KNOB	POM	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING

MATERIAL:

Actuator: SUS ;
 Top Base: SUS;
 Buttom Base:PA66+GF ;
 Terminal: Brass,Silver plated ;
 Nut: Brass, Ni plated .

The material contained in this drawing is the property of XiBang. Any use other than that specfically authorized by XiBang i5 prohibited. The above drawing IS subjected to change for improvement without prior notice.

 Switch Connector		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD						
		TITLE : METAL PUHS BUTTON SWITCH						
		MODEL : XB-PBM25-12M-F-PU3-S0						
UNIT : MM		DWN.	ZENQ. CHEN	DATE		TOLERANCE <=1.5mm±0.1 > 1.5mm±0.2 >=10mm±0.3	ANGLE ±2°	
SCALE : 3 : 1		CHK'D	PENG. GAO	DATE				
VERSION	01	APPD.	FEI. LONG. HE	DATE				