


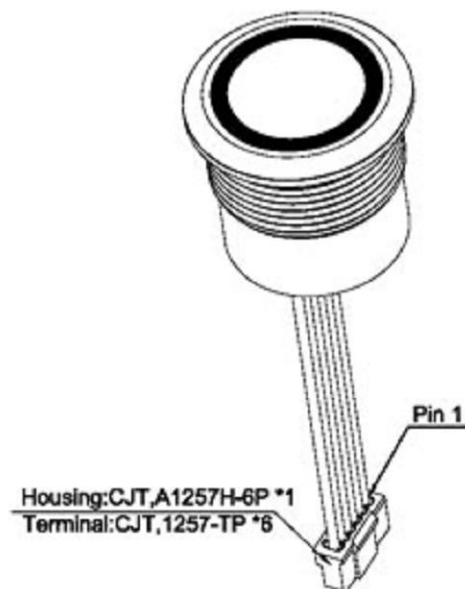


ROHS

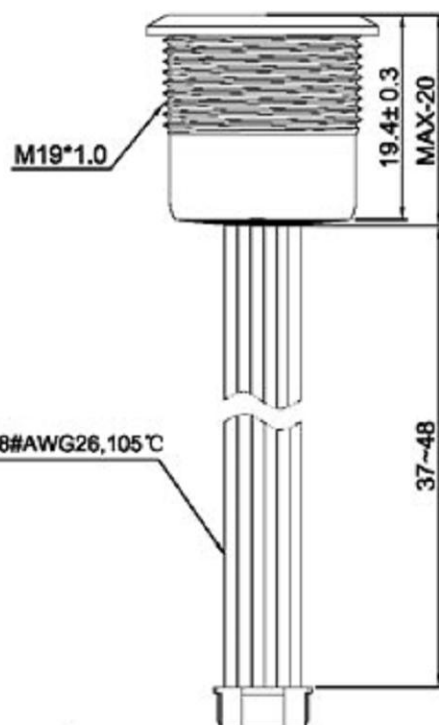

PAD LAYOUT



SPECIFICATIONS

Rating: 1 to 50mA ;
3 to 24VDC ;
Degree of protection: IEC IP67;
Contact Resistance: 100mΩ Max. ;
Dielectric Strength: 250 VAC For 1 minute ;
Insulation resistance: 100MΩ Min;
Total Travel: 0.8~1.0 mm ;
Operating Force: 600± 100gf ;
Operating life: 100,000 cycles Min;
LED Life: 50, 000 hours;
LED Rating: 20mA Max;
3 to 24VDC ;


Switch the material:

- 1.Shell material: Aluminium Alloy;
- 2.Key: PC;
- 3.Back shroud: PA66;
- 4.Supporting plate: POM;



- 1.Orange: Function
- 2.White: Anode(+)
- 3.Red: Red(-)
- 4.Black: Function
- 5.Purple: Green(-)
- 6.Gray: Blue(-)

- 6.灰色: 蓝灯负极
- 5.紫色: 绿灯负极
- 4.黑色: 开关功能
- 3.红色: 红灯负极
- 2.白色: 共阳极
- 1.橙色: 开关功能

CIRCUIT

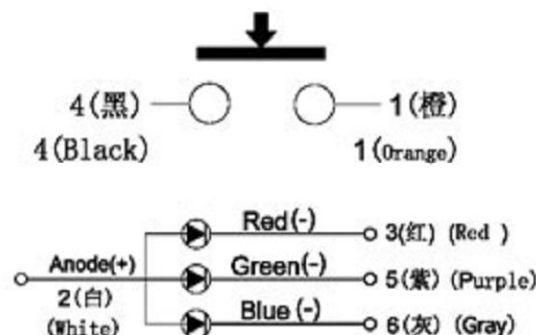

附件 (Accessory)




The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : METAL PUHS BUTTON SWITCH

MODEL : XB-PTM19-11M-P-RRGB-S0-H1



TOLERANCE
≤1.5mm±0.1
> 1.5mm±0.2
>10mm±0.3

ANGLE
±2°

UNIT : MM	DWN.	ZENQ. CHEN	DATE	
SCALE : 3 : 1	CHK'D	PENG. GAO	DATE	
VBRSION	01	APPD.	FEI. LONG. HE	DATE

7	SPRING	STEEL WIRE	1	NATURE
6	STEEL BALL	STEEL	1	NATURE
5	BOARD	PHENOLIC RESIN	1	NATURE
4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
3	FRAME	IRON STRIP	1	Ni PLATED
2	TERMINAL	BRASS STRIP	8	Ag PLATED
1	KNOB	POM	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING