


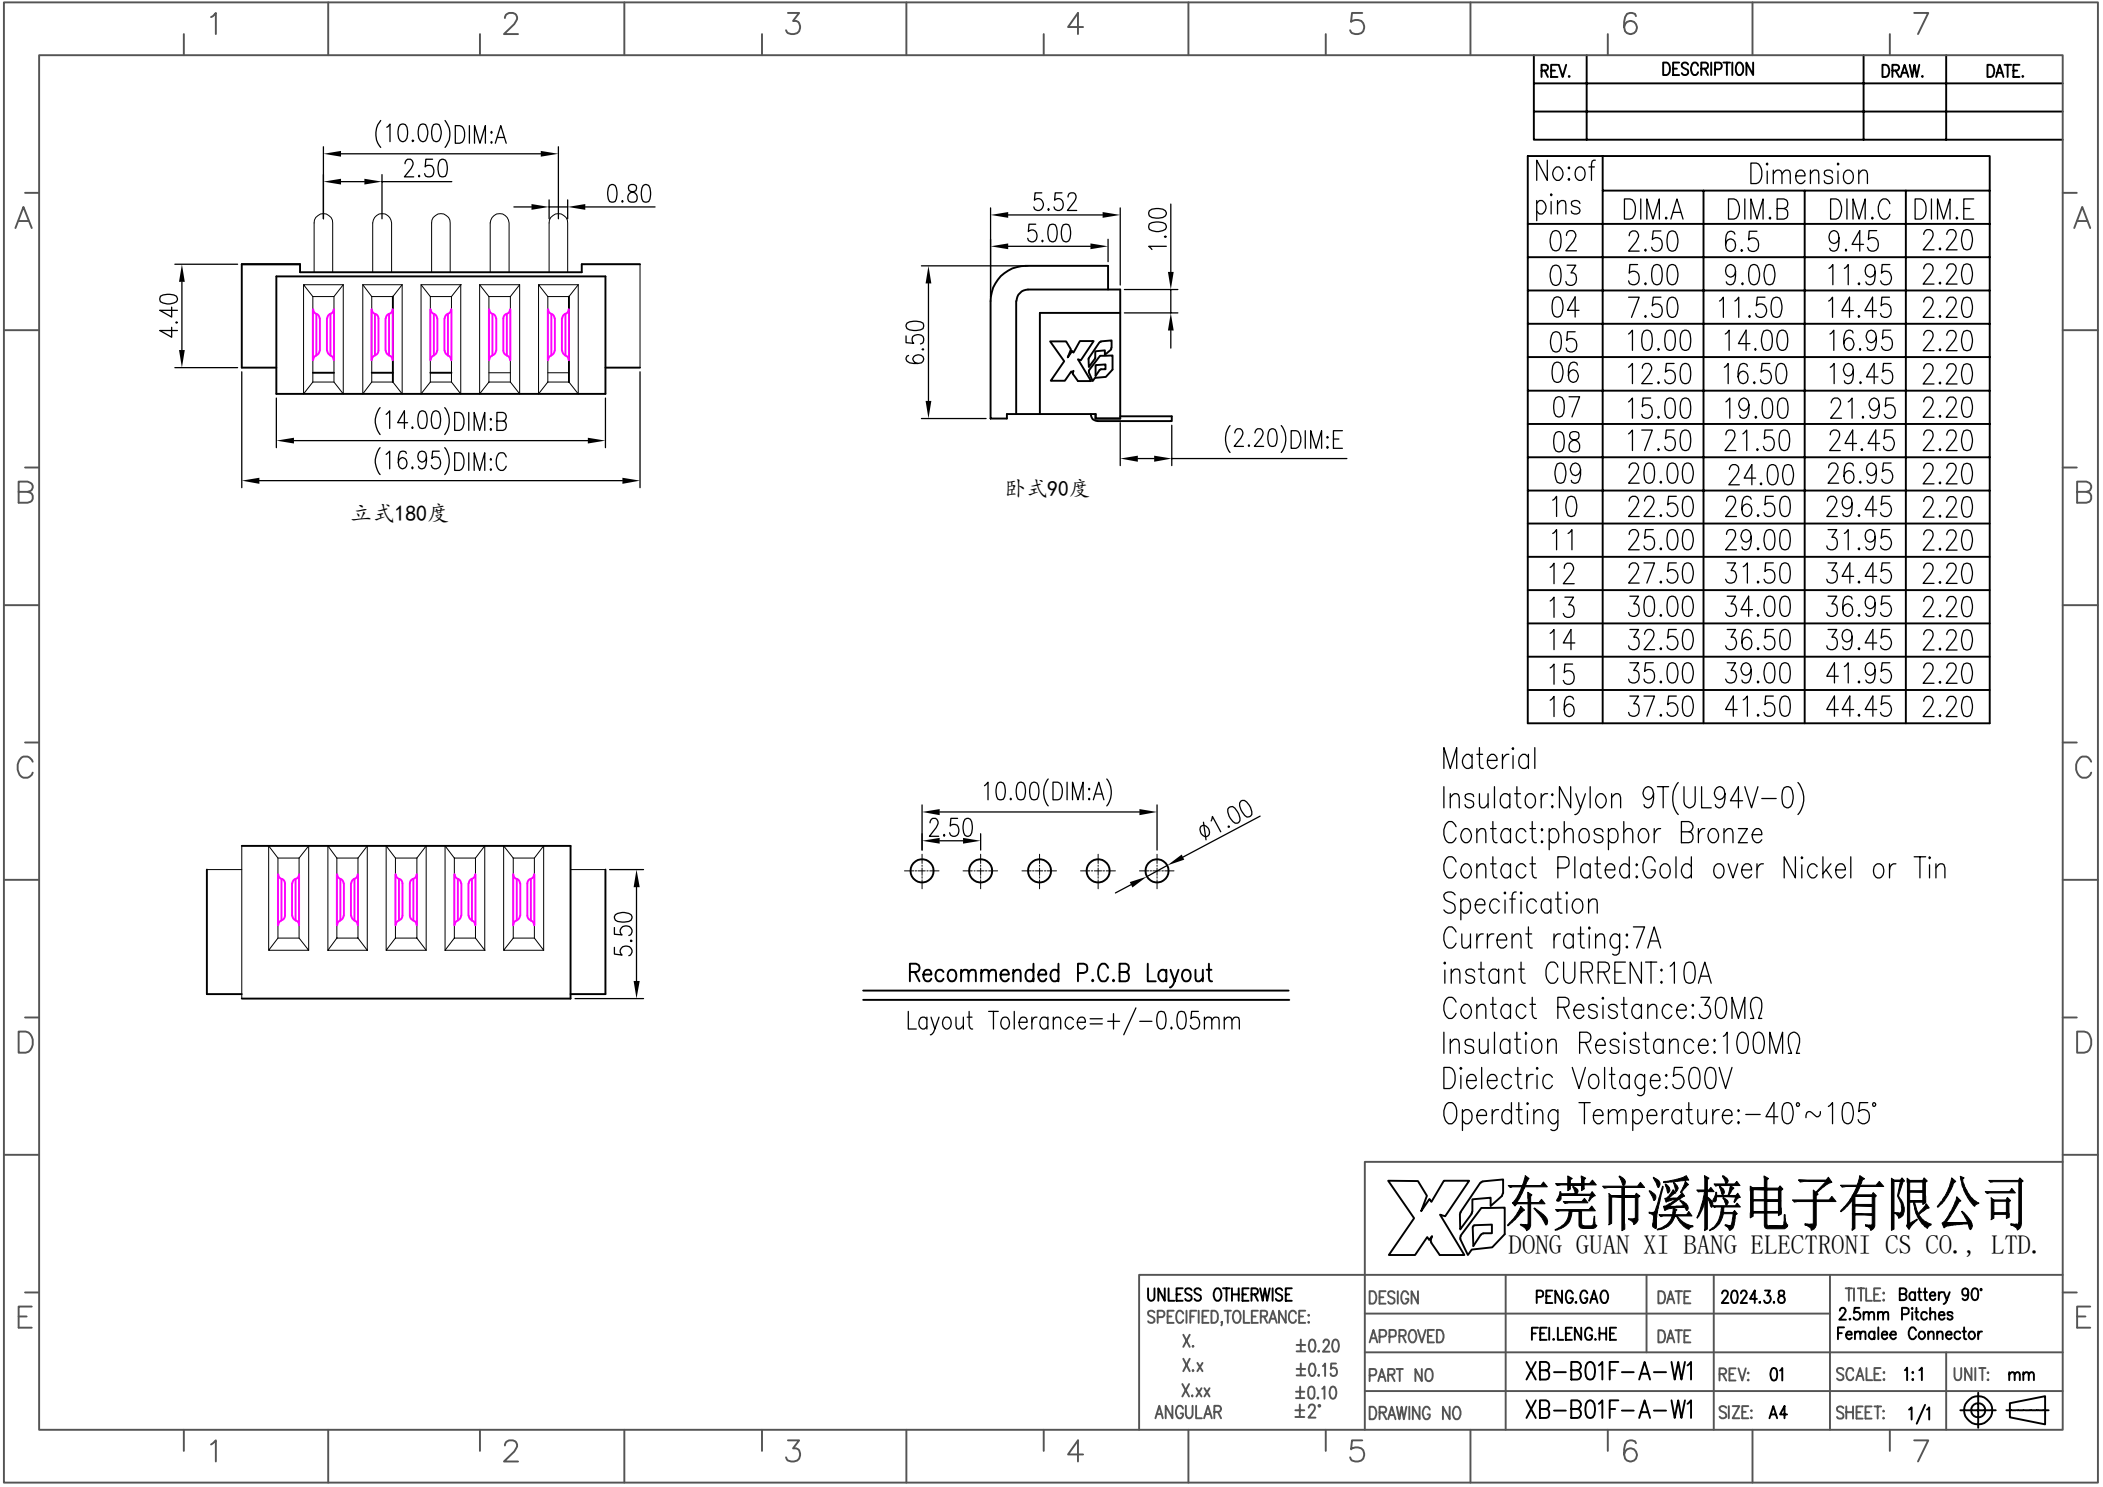

REV.	DESCRIPTION	DRAW.	DATE.

No:of pins	Dimension			
	DIM.A	DIM.B	DIM.C	DIM.E
02	2.50	6.5	9.45	2.20
03	5.00	9.00	11.95	2.20
04	7.50	11.50	14.45	2.20
05	10.00	14.00	16.95	2.20
06	12.50	16.50	19.45	2.20
07	15.00	19.00	21.95	2.20
08	17.50	21.50	24.45	2.20
09	20.00	24.00	26.95	2.20
10	22.50	26.50	29.45	2.20
11	25.00	29.00	31.95	2.20
12	27.50	31.50	34.45	2.20
13	30.00	34.00	36.95	2.20
14	32.50	36.50	39.45	2.20
15	35.00	39.00	41.95	2.20
16	37.50	41.50	44.45	2.20

Material
Insulator:Nylon 9T(UL94V-0)
Contact:phosphor Bronze
Contact Plated:Gold over Nickel or Tin
Specification
Current rating:7A
instant CURRENT:10A
Contact Resistance:30MΩ
Insulation Resistance:100MΩ
Dielectric Voltage:500V
Operdting Temperature:-40°~105°

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONI CS CO., LTD.

UNLESS OTHERWISE SPECIFIED,TOLERANCE: X. ±0.20 X.x ±0.15 X.xx ±0.10 ANGULAR ±2°	DESIGN	PENG.GAO	DATE	2024.3.8	TITLE: Battery 90° 2.5mm Pitches Female Connector	
	APPROVED	FEI LENG HE	DATE			
	PART NO	XB-B01F-A-W1	REV: 01	SCALE: 1:1	UNIT: mm	
	DRAWING NO	XB-B01F-A-W1	SIZE: A4	SHEET: 1/1		