



RoHS
Compliant

SYMBOL	REVISION	APPROVAL	DATE


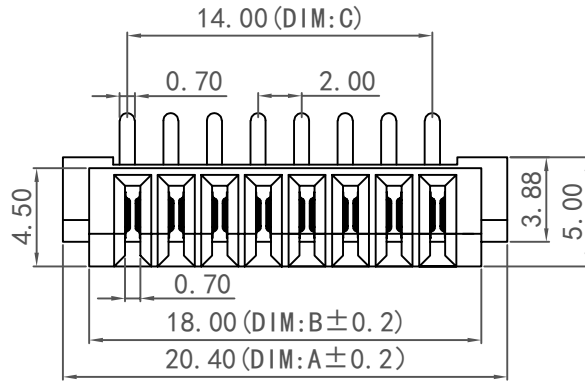


立式180度



卧式90度

No. of Pins	Dimension			
	DIM A	DIM B	DIM C	DIM D
2Pin	8.40	6.00	2.00	5.00
3Pin	10.40	8.00	4.00	7.00
4Pin	12.40	10.00	6.00	9.00
5Pin	14.40	12.00	8.00	11.00
6Pin	16.40	14.00	10.00	13.00
7Pin	18.40	16.00	12.00	15.00
8Pin	20.40	18.00	14.00	17.00
9Pin	22.40	20.00	16.00	19.00
10Pin	24.40	22.00	18.00	21.00
11Pin	26.40	24.00	20.00	23.00
12Pin	28.40	26.00	22.00	25.00
13Pin	30.40	28.00	24.00	27.00
14Pin	32.40	30.00	26.00	29.00
15Pin	34.40	32.00	28.00	31.00
16Pin	36.40	34.00	30.00	33.00

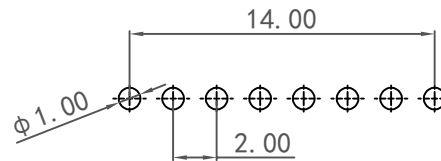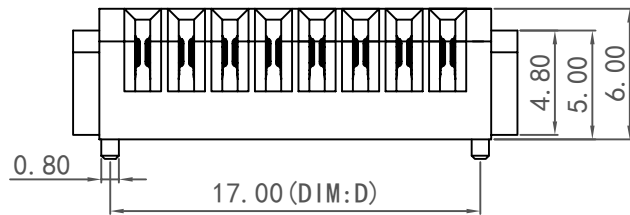

RECOMMENDED PCB LAYOUT
TOP VIEW (.XX±0.05)

SPECIFICATIONS

1. ELECTRICAL CHARACTERISTICS:

- 1-1. RATING: DC 12V 5A/Pin
- 1-2. CONTACT RESISTANCE: 30mΩ MAX(INITIAL)
- 1-3. DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
- 1-4. INSULATION RESISTANCE: 500MΩ MIN,
MEASURED BY 500V DC

2. LIFE TEST: MECHANICAL LIFE TEST 5,000 CYCLES.

3. TEMPERATURE RISE : 30° C MAX

2	HOUSING	LCP/PA9T	1	GRAY/BLACK
1	CONTACT TERMINAL	PHOSPHOR BRONZE	8	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING

XG 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

PART NAME	CONNECTOR		DRAWING	PENG. GAO	DWG. No.	
PART NO.	XB-C-B01F-W-2P/16P系列卧式		CHECK	FEI. LONG. HE	REV.	A1
	UNIT:	TOLERANCE	X. ±0.15 X. * ±1°	APPROVAL	JIE. HAI. LAI	DATE
	mm	OTHERWISE	X.X ±0.10 X.X * ±0.5° X.XX ±0.05 X.XX ±0.05° X.XXX ±0.005 X.XXX ±0.005°			
		ANGLE	0° ±3°	SCALE	3:1	PAGE
						10-10-2021
						1 OF 1