

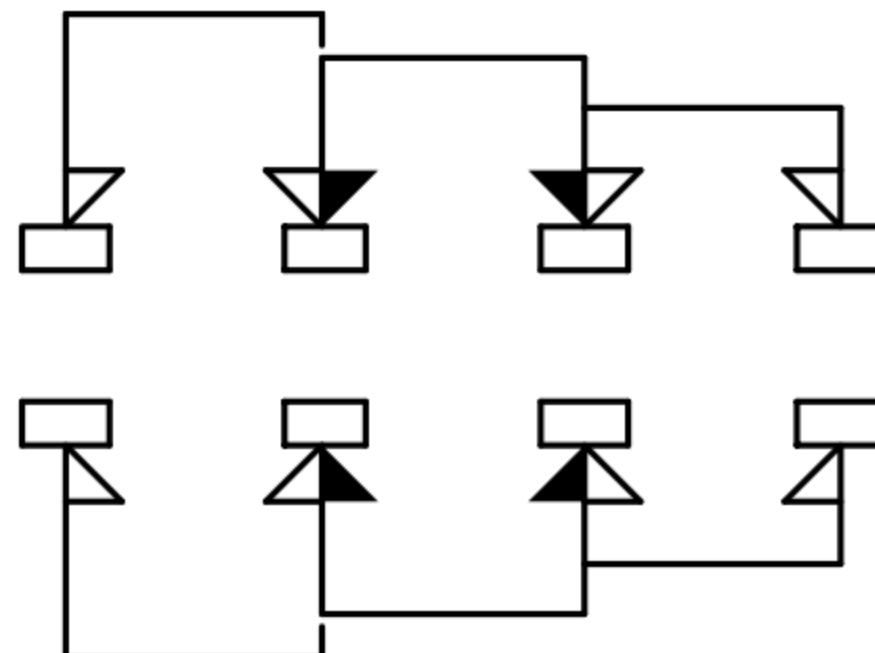
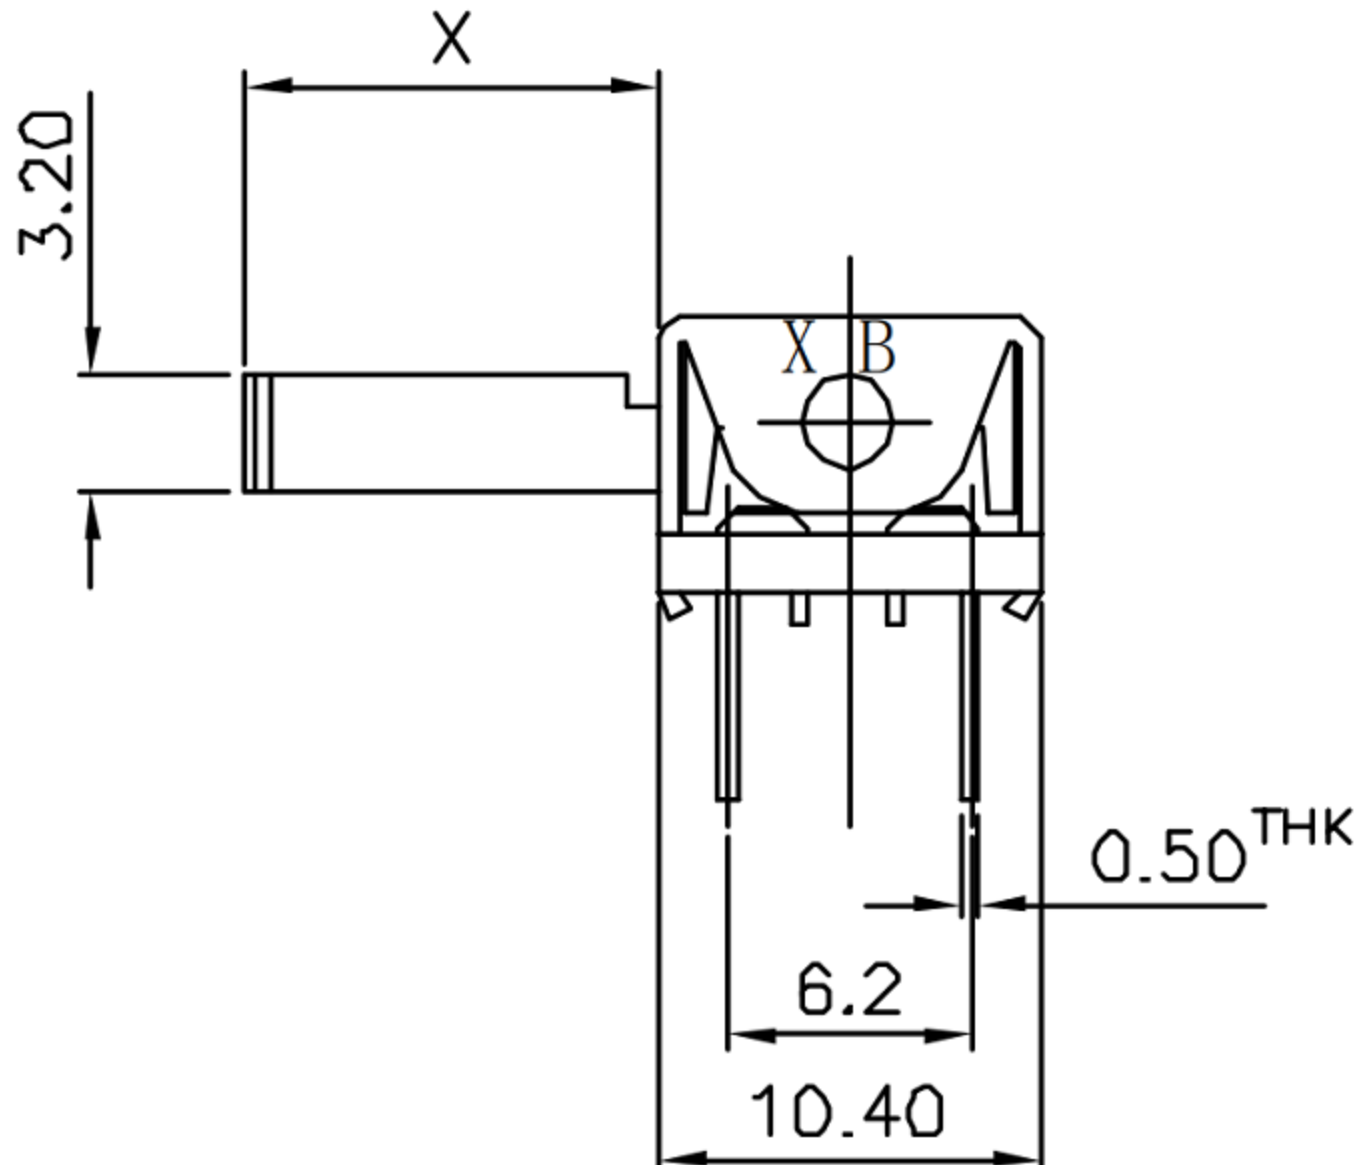


ROHS

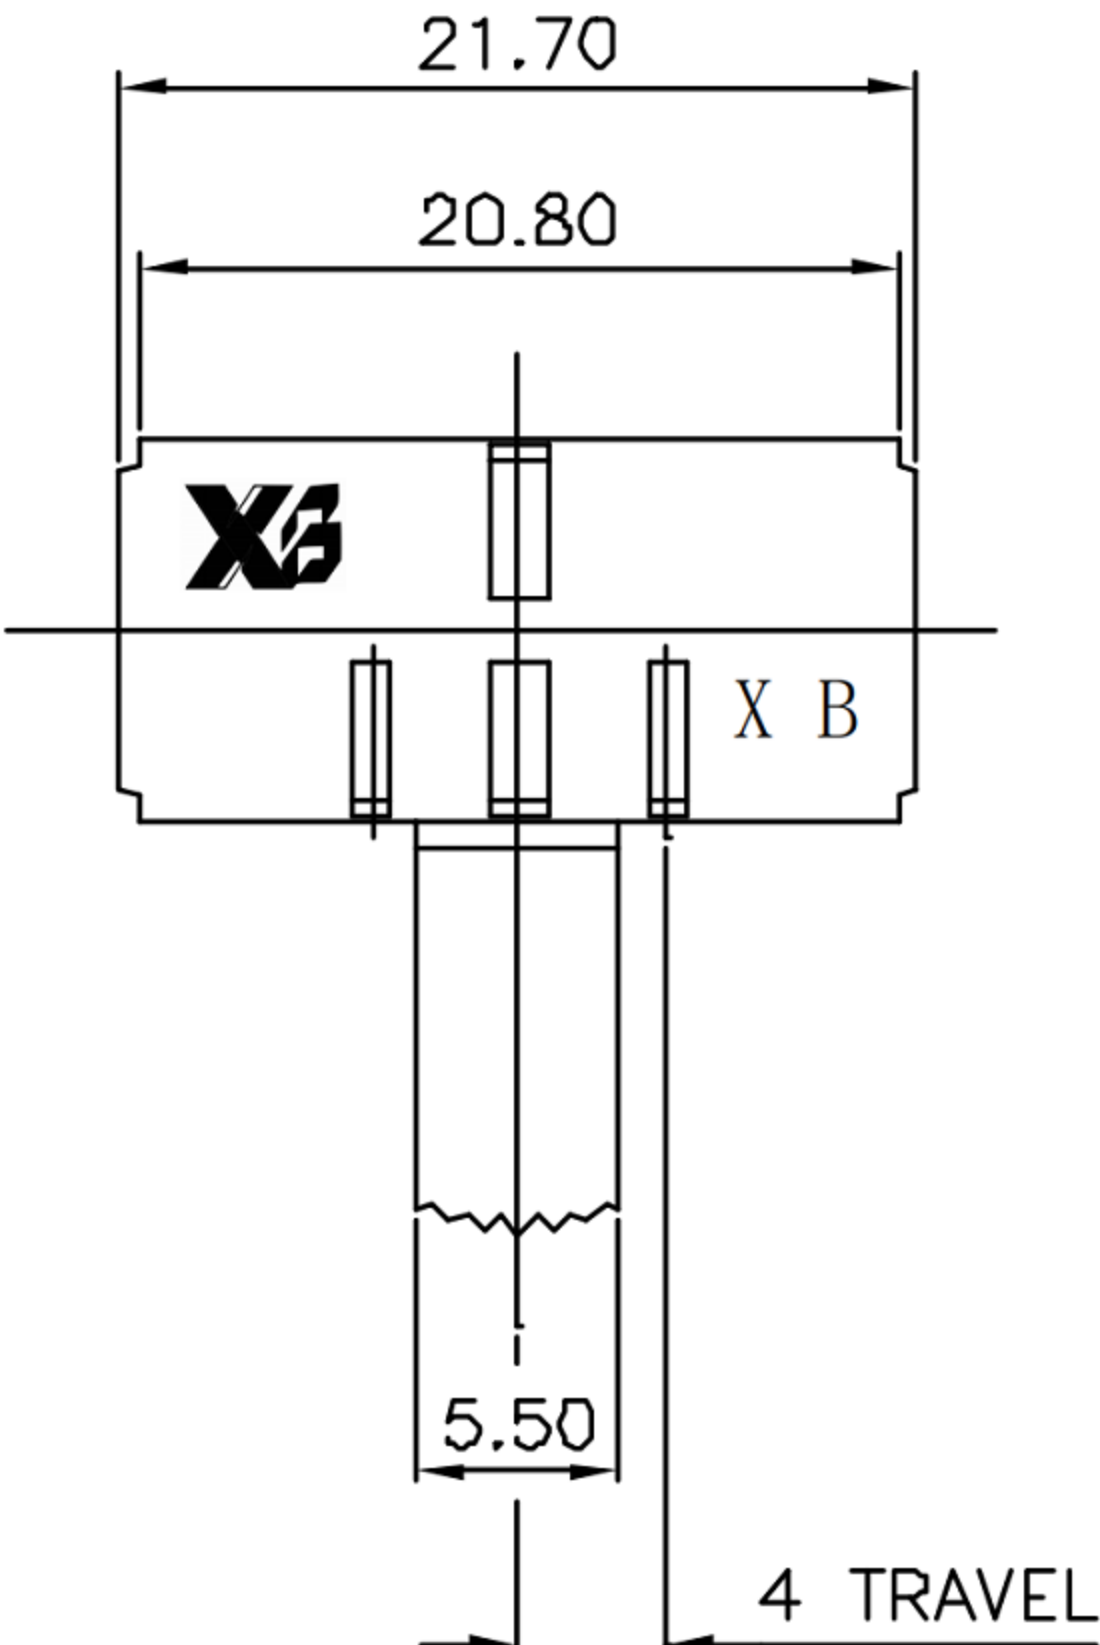

NON-SHORTING SCHEMATIC

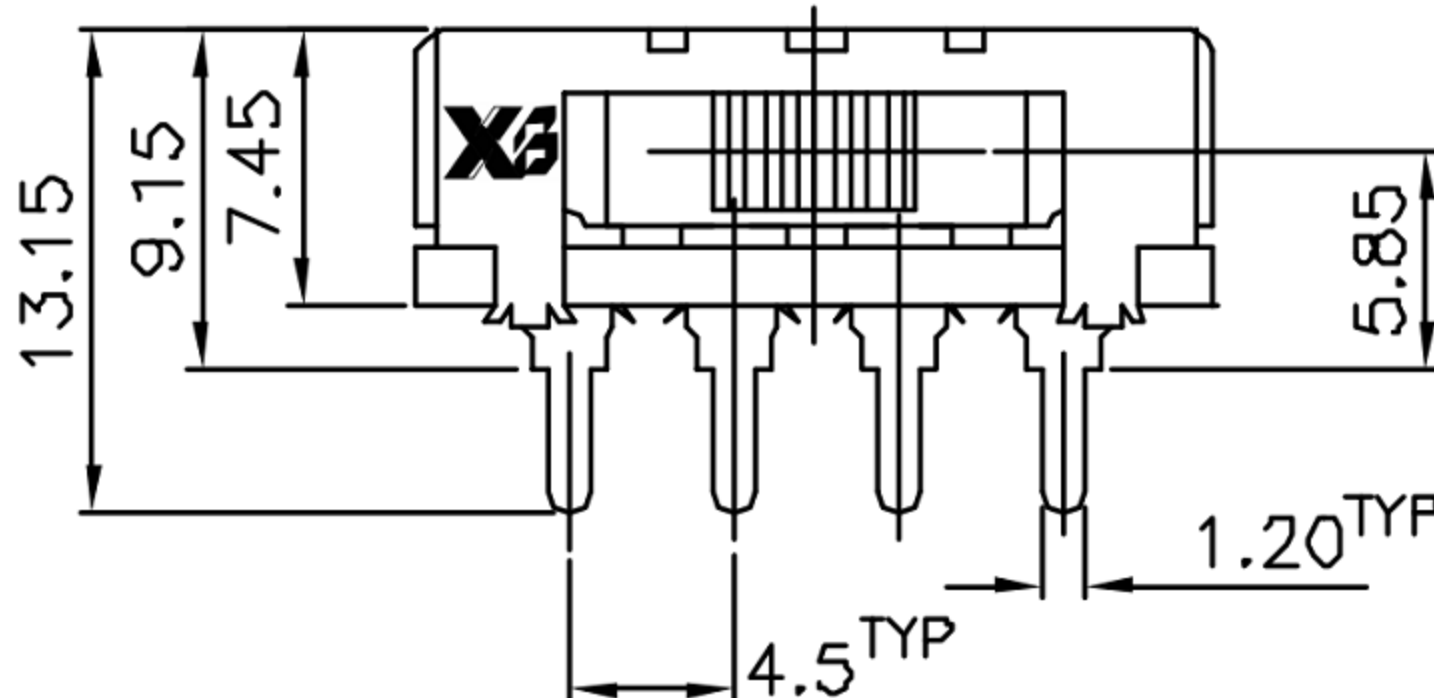

SPECIFICATION		(INITIAL)
RATING:	DC 50V	0.5A
CONTACT RESISTANCE:	MAX. 30m Ω (INITIAL)	
INSULATION RESISTANCE:	500M Ω AT 500V DC	
WITHSTAND VOLTAGE:	AC 500V FOR 1 MIN	
OPERATION FORCE:	300 $\pm$ 100 g	
SWITCHING LIFE:	10000 Cycles{6-10c/m loading}	


The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : HORIZONTAL SLIDE SWITCH

MODEL : XB-SK-23H09T

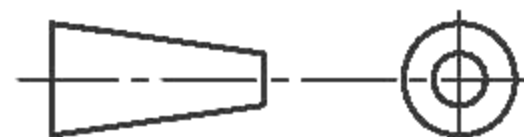

TOLERANCE
 $\leq 1.5\text{mm} \pm 0.1$
 $> 1.5\text{mm} \pm 0.2$
 $> 10\text{mm} \pm 0.3$

ANGLE
 $\pm 2^\circ$

7	SPRING	STEEL WIRE	1	NATURE
6	STEEL BALL	STEEL	1	NATURE
5	BOARD	PHENOLIC RESIN	1	NATURE
4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
3	FRAME	IRON STRIP	1	Ni PLATED
2	TERMINAL	BRASS STRIP	8	Ag PLATED
1	KNOB	POM	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING