
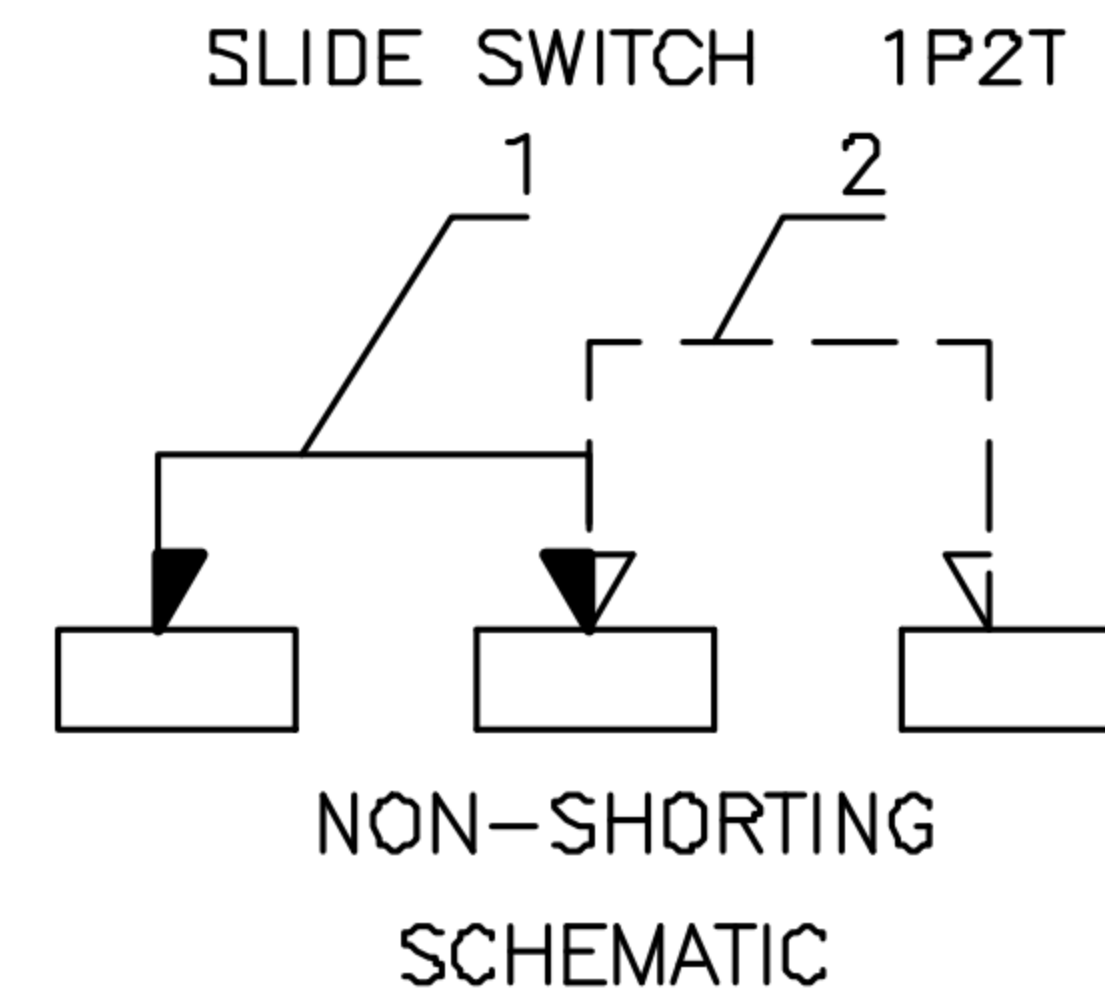
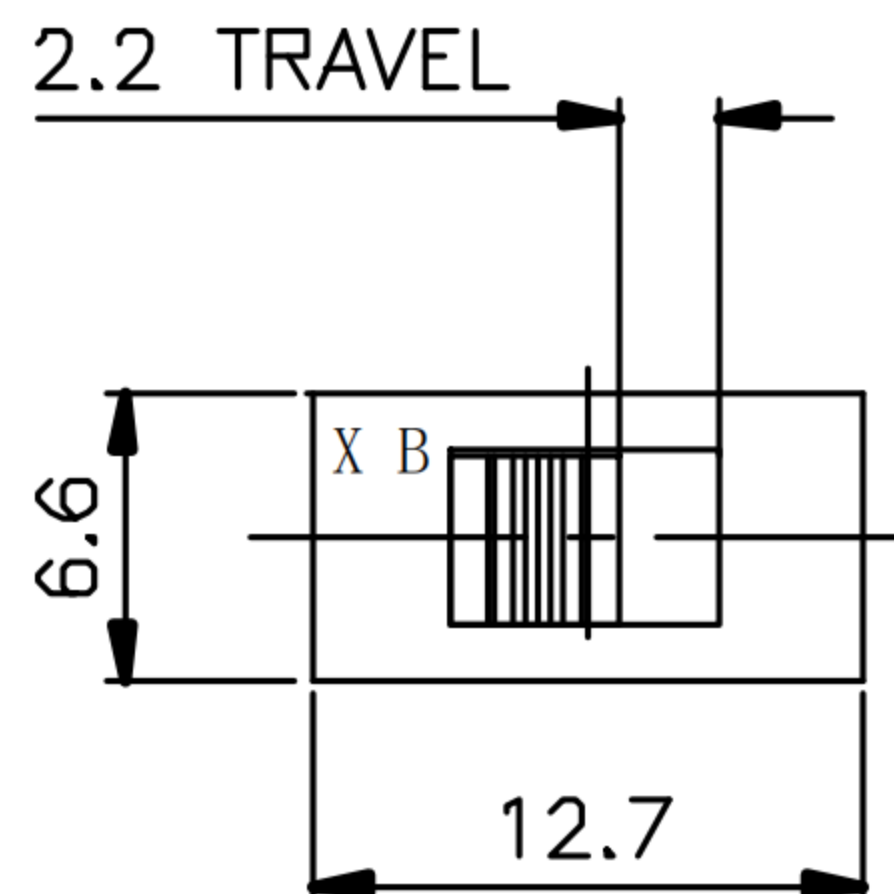


ROHS

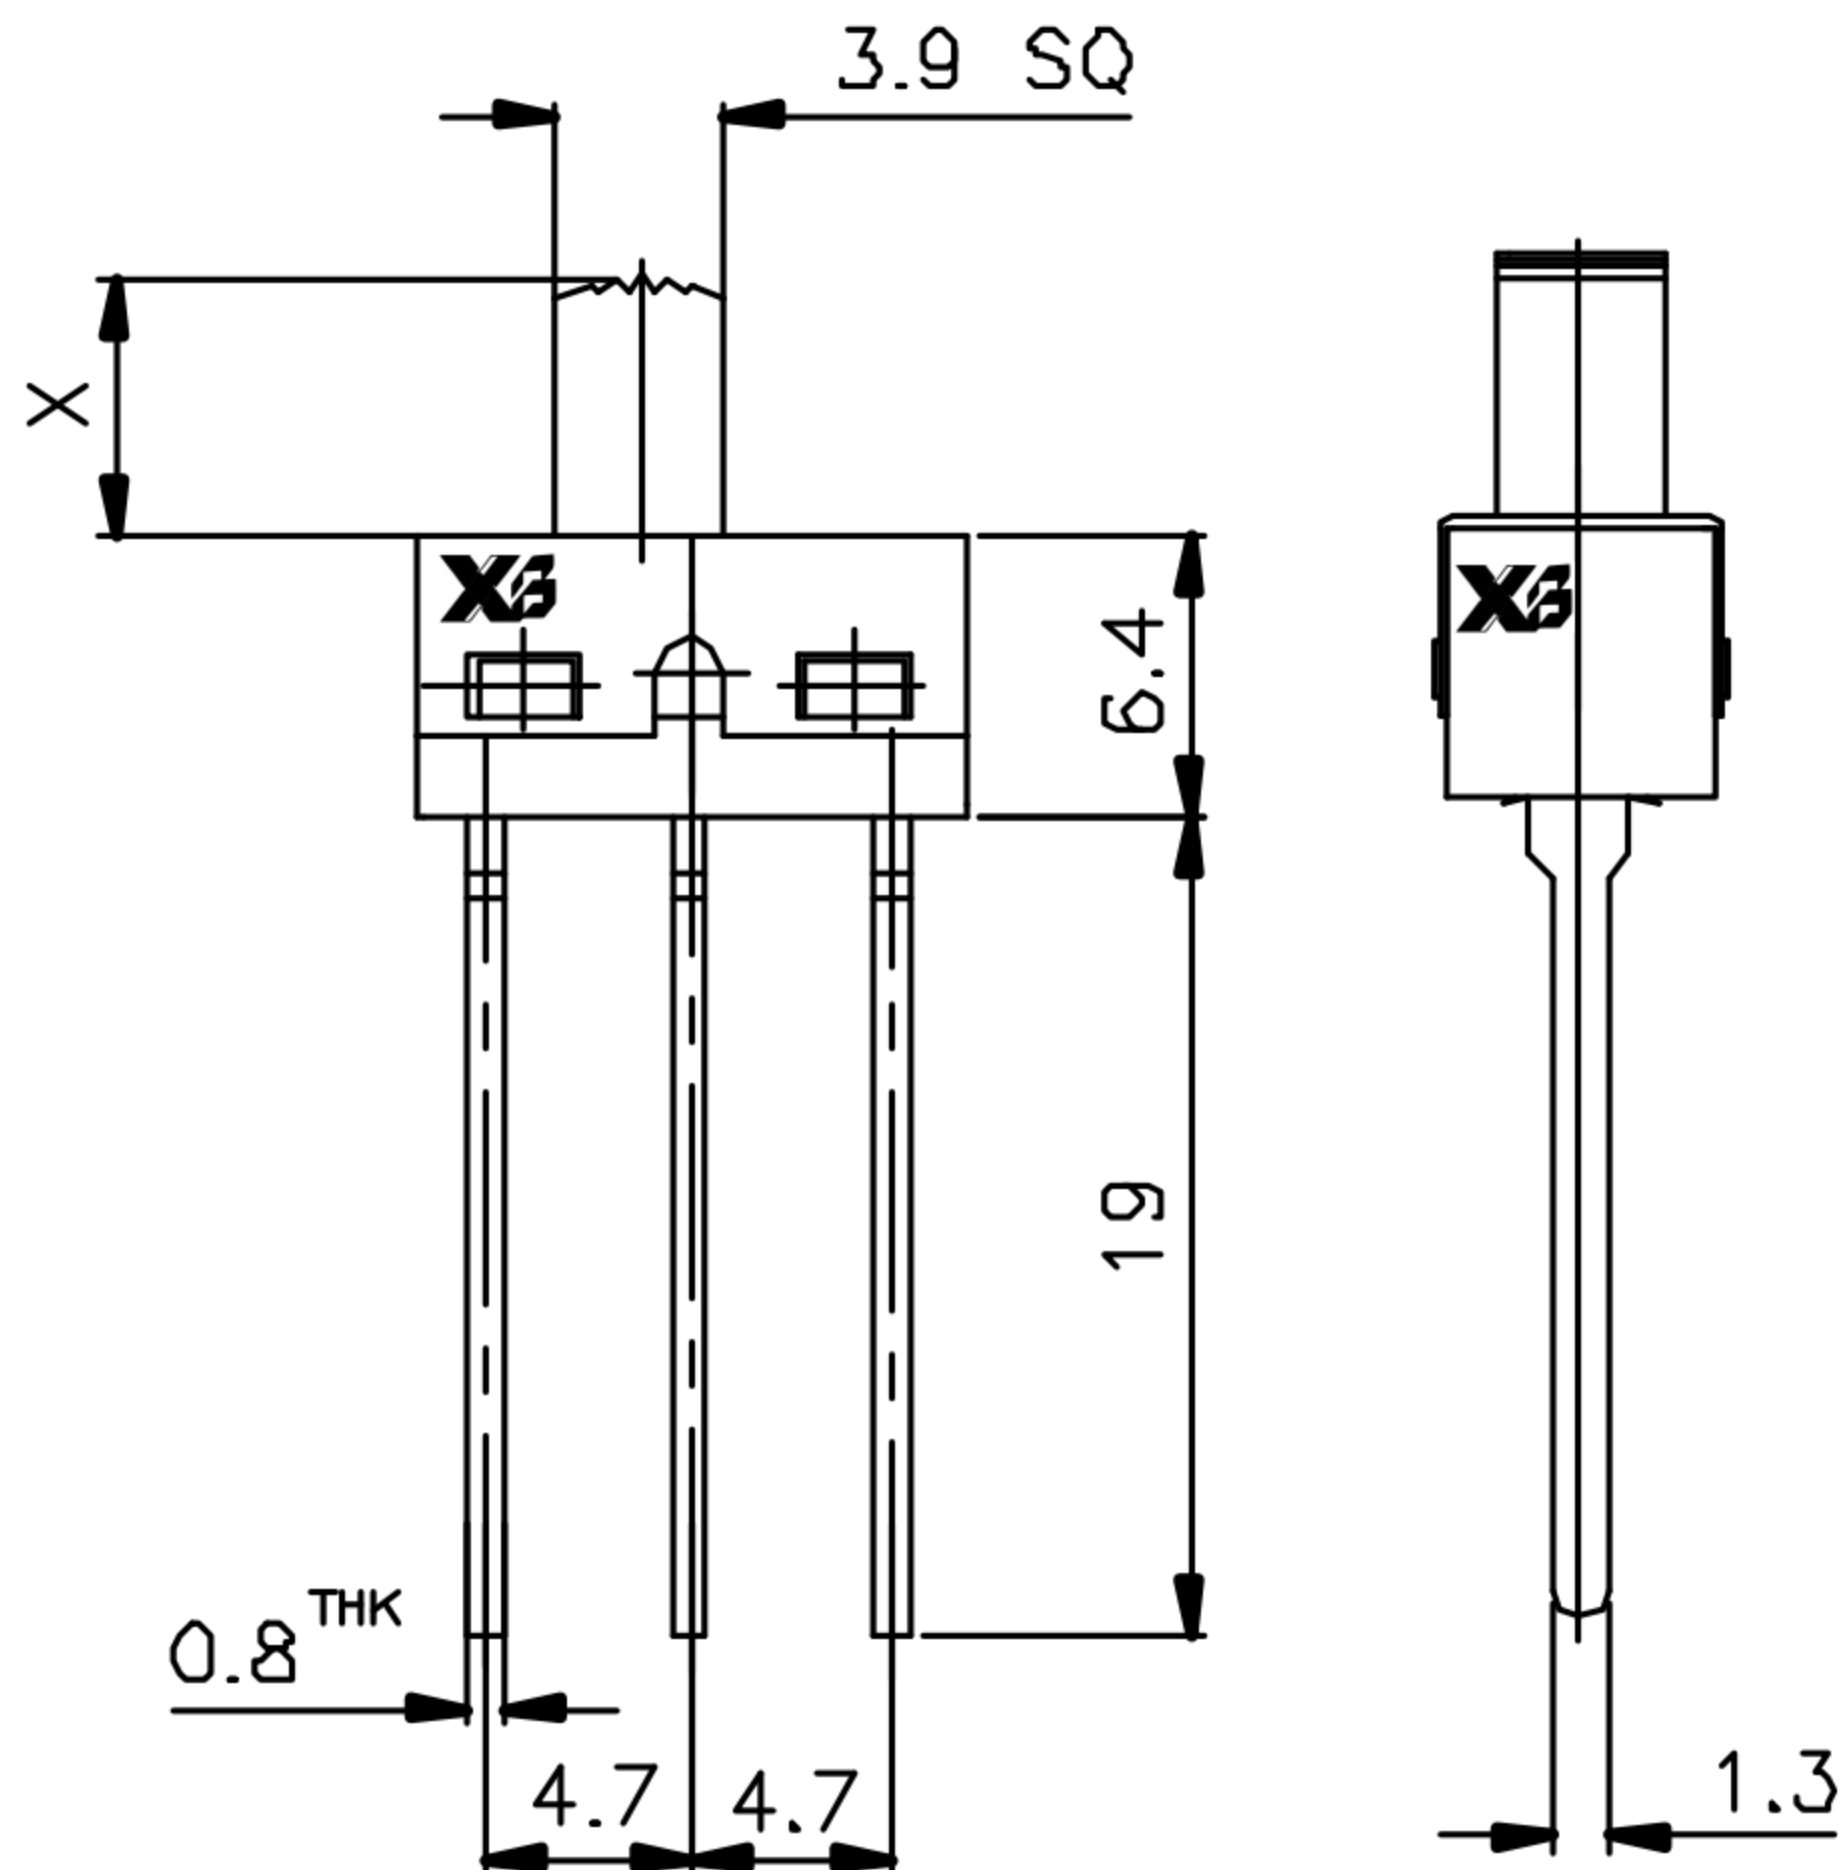

SPECIFICATION (INITIAL)

RATING:	AC 250V 1A
CONTACT RESISTANCE:	Not more than 30mΩ
INSULATION RESISTANCE:	500MΩ at 500V DC
WITHSTAND VOLTAGE:	AC 1000V for 1 min
OPERATION FORCE:	250±100g
SWITCHING LIFE:	10000 cycles (6-10c/m loading)

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing is subjected to change for improvement without prior notice.

 Switch Connector		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD												
		TITLE : HORIZONTAL SLIDE SWITCH												7
MODEL : XB-SS-12D10LL										6	STEEL BALL	STEEL	1	NATURE
UNIT : MM		DWN.	ZENQ. CHEN	DATE			TOLERANCE <=1.5mm±0.1 > 1.5mm±0.2 >=10mm±0.3	ANGLE ±2°	5	BOARD	PHENOLIC RESIN	1	NATURE	
SCALE : 3 : 1		CHK'D	PENG. GAO	DATE					4	CONTACT CLIP	PBS STRIP	2	Ag PLATED	
VERSION 01		APPD.	FEI. LONG. HE	DATE					3	FRAME	IRON STRIP	1	Ni PLATED	
									2	TERMINAL	BRASS STRIP	8	Ag PLATED	
									1	KNOB	POM	1	BLACK	
									NO.	PART NAME	MATERIAL	QTY.	FINISHING	