


ROHS

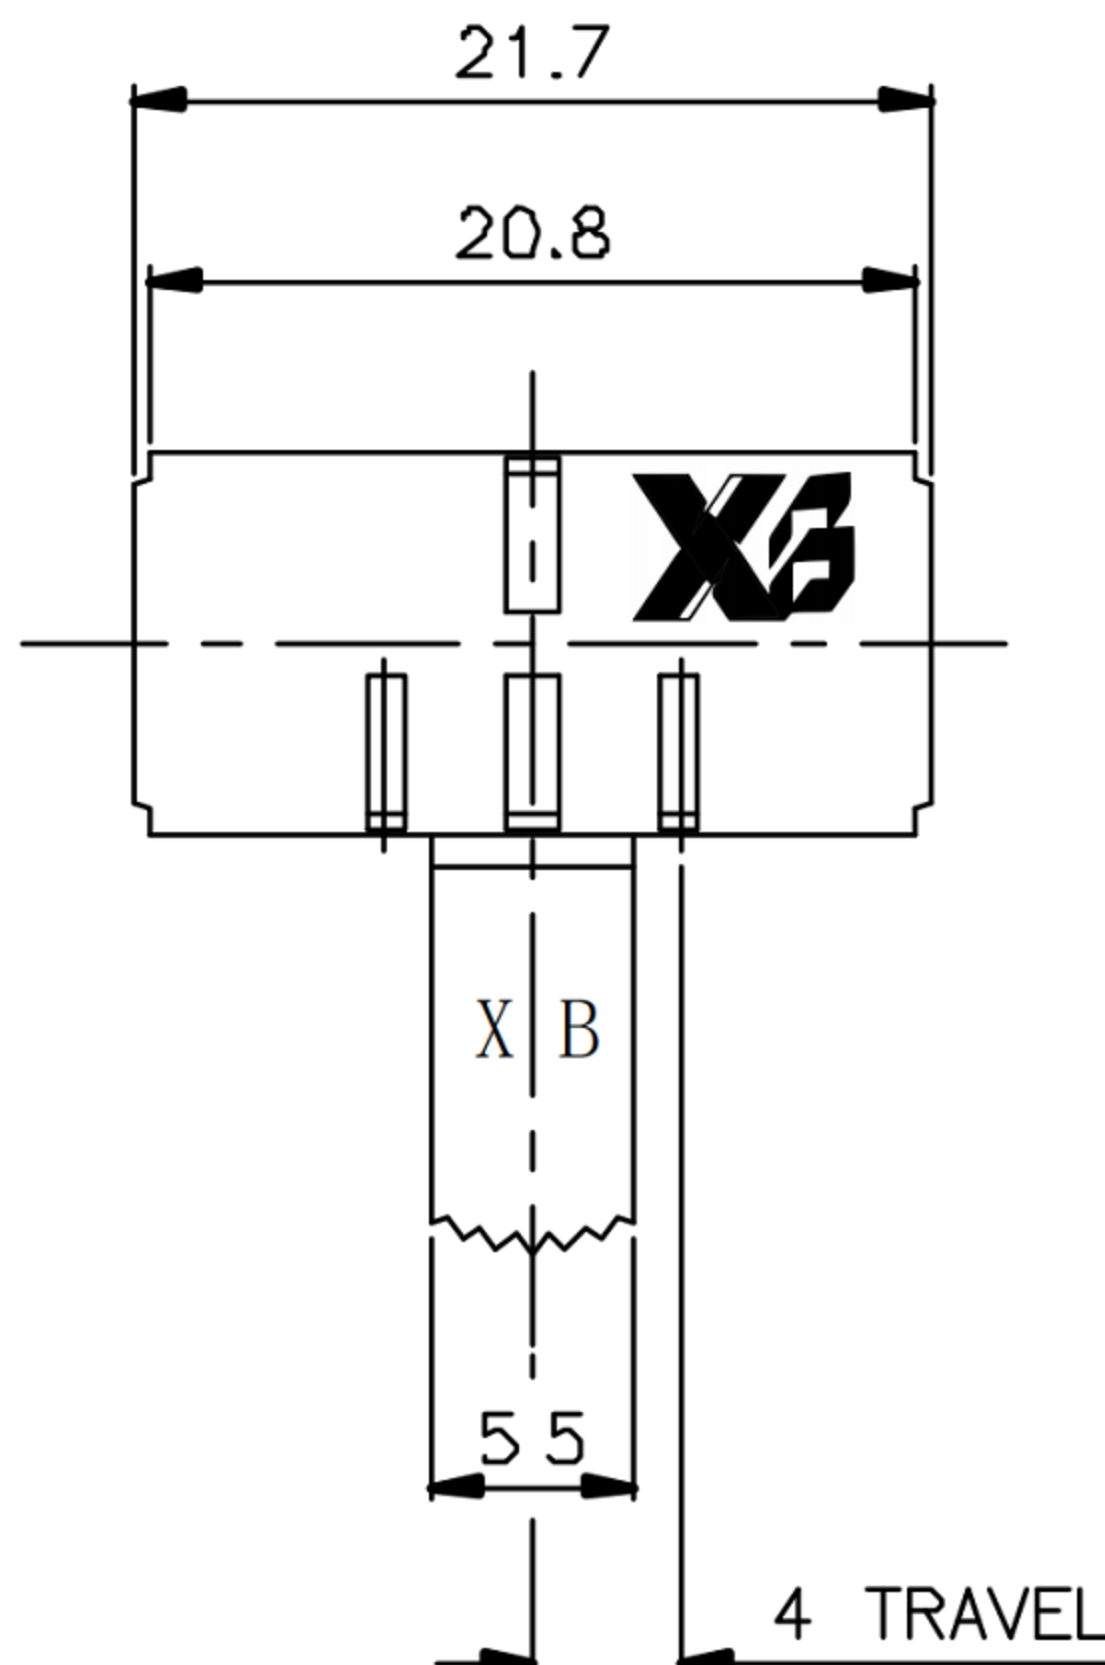

RATING:	AC 125V 3A
CONTACT RESISTANCE:	MAX. 30mΩ
INSULATION RESISTANCE:	500MΩ AT 500V DC
WITHSTAND VOLTAGE:	AC 1000V FOR 1 MIN
OPERATION FORCE:	300 ± 100 g
SWITCHING LIFE:	10,000 Cycles(6-10c/m loading)

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

ANGLE
 $\pm 2^\circ$

7	SPRING	STEEL WIRE	1	NATURE
6	STEEL BALL	STEEL	1	NATURE
5	BOARD	PHENOLIC RESIN	1	NATURE
4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
3	FRAME	IRON STRIP	1	Ni PLATED
2	TERMINAL	BRASS STRIP	8	Ag PLATED
1	KNOB	POM	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING