

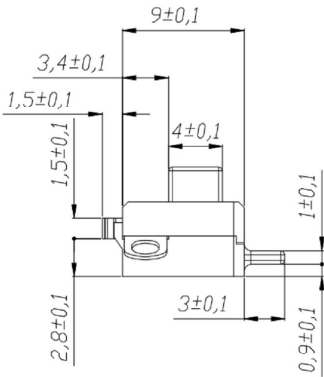
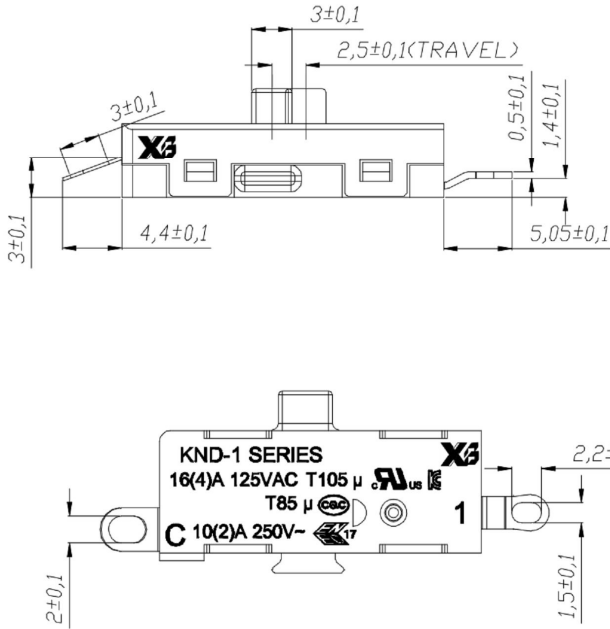
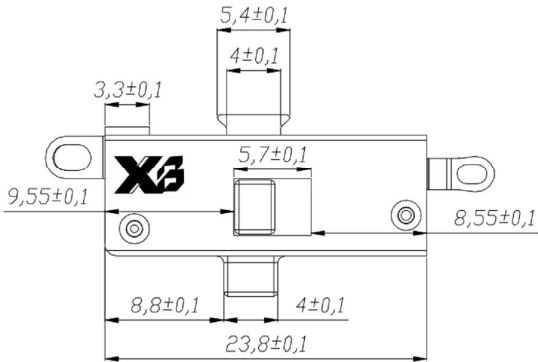


ROHS



线路图
CIRCUIT DIAGRAM



电流电路
CURRENT CIRCUIT

CIRCUIT:007

位置POSITION	电路CIRCUIT
1(INITIAL)起始	OFF
2	C+1

- 滑动开关型号 SLIDE SWITCH MODEL: KND-1-AS007-R2
- 焊线端子 SOLDER CONNECTOR TYPE;
单刀单掷 SINGLE POLE SINGLE THROW
- 额定值 RATING: 16(4)A 125/250VAC μ T105 (CQC;ENEC17;NEMKO;UL,KC)
10(2)A 125/250VAC μ T105 (UL)
7(2)A 125/250VAC μ T105 (UL)
10(2)A 125/250VAC μ T85 (CQC;ENEC17;NEMKO)
7(2)A 125/250VAC μ T85 (CQC;ENEC17;NEMKO)
- 接触电阻 CONTACT RESISTANCE: <50m Ω (INITIAL)
- 绝缘电阻 INSULATION RESISTANCE: $\geq 100\text{M}\Omega$ (DC500V/1MIN)
- 介电强度 DIELECTRIC STRENGTH: 1500V /5mA /1MIN
- 机械寿命 MECHANICAL LIFE: >50000 CYCLES
- 电气寿命 ELECTRICAL LIFE: >10000 CYCLES
- 端子手工焊接条件 SOLDER ABILITY OF TERMINAL: MAX260°C, 3S
- 操作力 OPERATION FORCE: 550 $\pm$ 150gf
- 所有部件均使用环保材料 ALL MATERIALS ARE RoHS COMPLIANT



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : XB SLIDE SWITCH

MODEL : XB-KND-1-AS007-R2



TOLERANCE
 $\leq 1.5\text{mm} \pm 0.1$
 $> 1.5\text{mm} \pm 0.2$
 $\geq 10\text{mm} \pm 0.3$

ANGLE
 $\pm 2^\circ$

UNIT : MM	DWN.	DATE	2011-11-19
SCALE : 4 : 1	CHK'D	DATE	
VBRSION	01	APPD.	DATE

NO.	PART NAME	MATERIAL	QTY.	FINISHING
8	SEAL PLATE	SUS	2	NATURE
7	STEEL BALL	STEEL	1	NATURE
6	SPRING	SUS	1	NATURE
5	BOARD	PHENOLIC RESIN	1	NATURE
4	CONTACT CLIP	PBS STRIP	1	Ag PLATED
3	FRAME	IRON STRIP	1	Ni PLATED
2	TERMINAL	BRASS STRIP	4	Ag PLATED
1	KNOB	POM	1	BLACK