

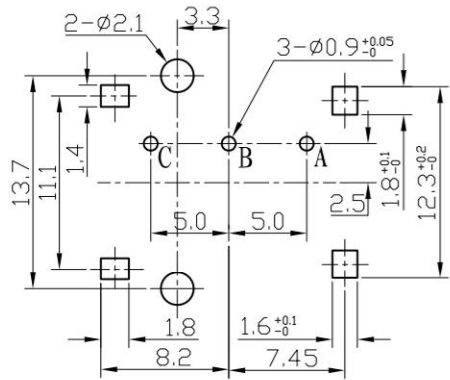





ROHS

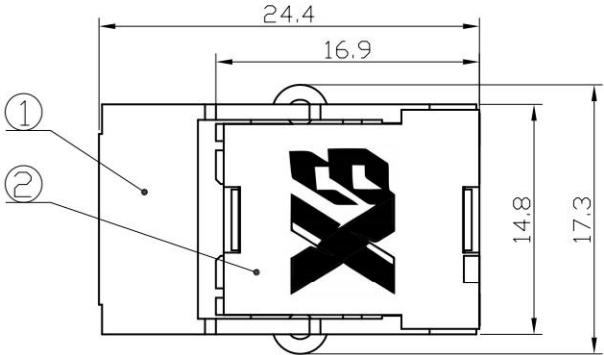

GENERAL TOLERANCES: ± 0.05
P.C.B MOUNTING

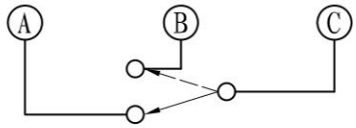

SHORTING
SCHEMATIC

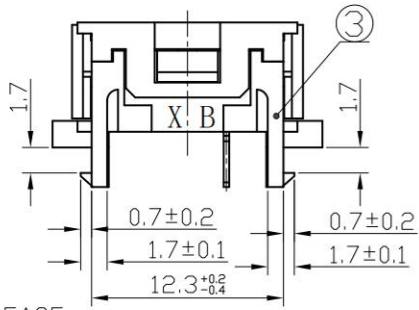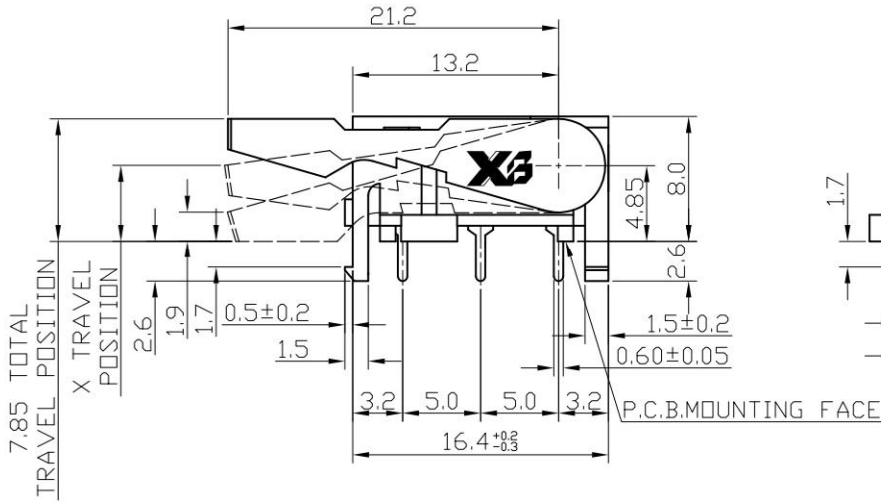


PUSH DOWN	SHORTING TYPE	
	CITCUIT DIAGRAM	
	ON	OFF
	OFF	ON
7.85		4.3 1.9
4.6		
TRAVEL POSITION (X) TOLERANCE: $\pm 0.50\text{mm}$		
RELEASE	SHORTING TYPE	
	CITCUIT DIAGRAM	
	ON	OFF
	OFF	ON
7.85		4.6 1.9
4.9		
TRAVEL POSITION (X) TOLERANCE: $\pm 0.50\text{mm}$		



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : HOOK SWITCH

MODEL : HS-12L07



TOLERANCE
 $\leq 1.5\text{mm} \pm 0.1$
 $> 1.5\text{mm} \pm 0.2$
ANGLE TOL
 $\pm 2^\circ$

UNIT : MM	DWN.	DATE
SCALE : 2 : 1	CHK'D	DATE
VERSION 01	APPD.	DATE

8	CONTACT OIL	1000#	1	NATURE
7	SLIDER	PBT	1	BLACK
6	SPRING	SUS	1	NATURE
5	CONTACT	PBS STRIP	1	Ag CLAD
4	TERMINAL	BRASS STRIP	3	Ag PLATED
3	CASE	PBT	1	NATURE
2	COVER	POM	1	BLUE
1	KNOB	POM	1	BLUE
NO.	PART NAME	MATERIAL	QTY.	FINISHING