

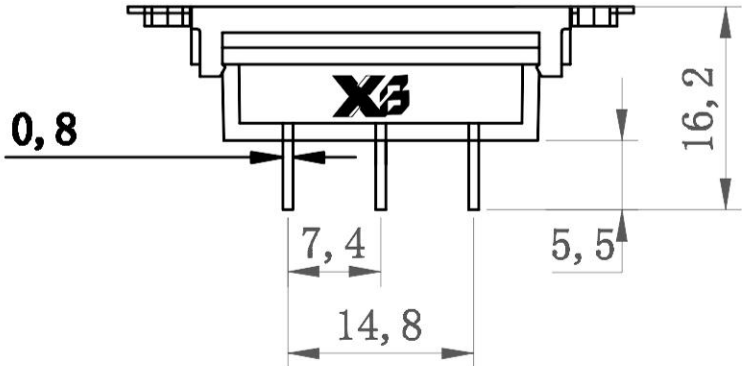


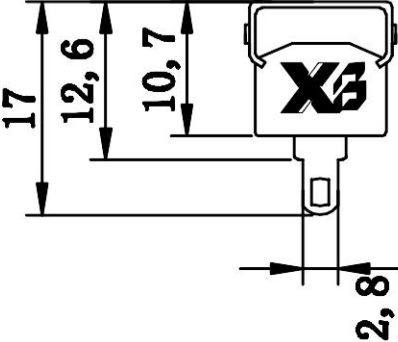

线路图

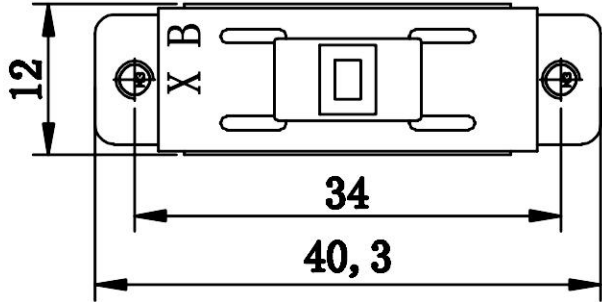

X B

12A125/250VAC

1

2

A

16

1

14

B

10(1)A250V~T85

SPECIFICATION (INITIAL)	
RATING:	10A 12A 125V 250V AC
CONTACT RESISTANCE:	Not more than 30mΩ
INSULATION RESISTANCE:	500MΩ at1500V DC
WITHSTAND VOLTAGE:	AC 500V for 1 min
OPERATION FORCE:	300±100g
SWITCHING LIFE:	10000 Cycles(6-10c/m loading)

序号	名称	数量	材料	型号	阻燃
1	基座	1	PA66	EPR27L	V0级
2	推子	1	PA66	EPR27L	V0级
3	盖板	1	铁皮		
4	焊脚	3	黄铜电镀		
5	弹黄	2	碳索钢丝		

The material contained in this drawing is the property of XiBang. Any use other than that specfically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

X B

Switch Connector

东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : XB SLIDE SWITCH

MODEL : XB-CH-Z03-E

UNIT : MM

SCALE : 3 : 1

VBRSION 01

DWN.

CHK'D

APPD.

ZENQ. CHEN

PENG. GAO

FEI. LONG. HE

DATE

DATE

DATE

TOLERANCE

<=1.5mm±0.1

> 1.5mm±0.2

>=10mm±0.3

ANGLE

±2°

7	SPRING	STEEL WIRE	1	NATURE
6	STEEL BALL	STEEL	1	NATURE
5	BOARD	PHENOLIC RESIN	1	NATURE
4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
3	FRAME	IRON STRIP	1	Ni PLATED
2	TERMINAL	BRASS STRIP	8	Ag PLATED
1	KNOB	POM	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING