





CAD FILE:




配件: 螺母



配件: 菊花介






安装孔示意图



电路原理示意图

SCHEMATIC

CIRCUIT : ON-ON(2P2T)

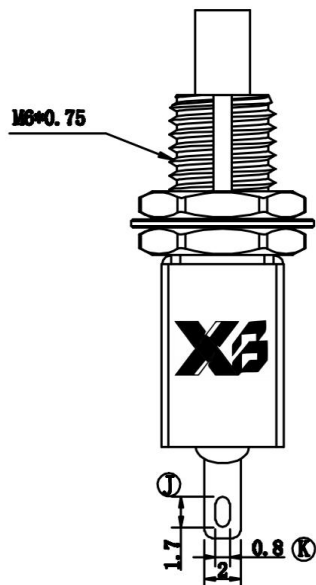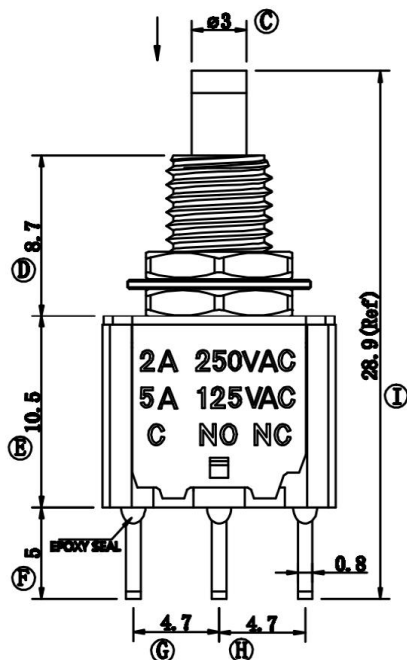

配件: 按帽

Technical characteristics

SPECIFICATION: 5 A max. @ 125 VAC.

2 A max. @ 250 VAC.

MECHANICAL LIFE: 10,000 make-and-break cycles.

CONTACT RESISTANCE: 20mΩ max. initial @2-4VDC
100mA for both silver.

INSULATION RESISTANCE: 1000 MΩ min.

DIELECTRIC STRENGTH: 1500 VAC min.

OPERATING TEMPERATURE: -30°C to +85°C.

Materials

CASE: PPA (94V-0)

CAP: ABS

HOUSING: Stainless Steel.

ACTUATOR: PA66.

BUSHING: Alloy, nickel plated.

CONTACT/TERMINALS: Copper alloy silver plated.

RoHS & lead-free

备注: 按帽、螺母、菊花介与开关分开包装

注: "*" 表示关键尺寸(4个).

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Button switch			UNIT : mm	DRWG NO.: XB-PB-101M
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEI: XB-PB-101M			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					