
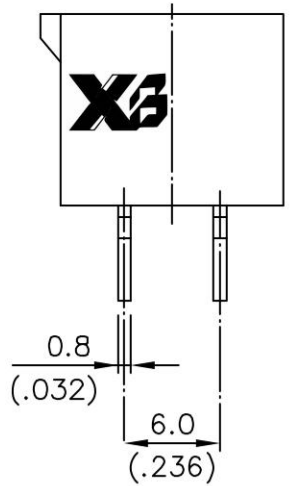
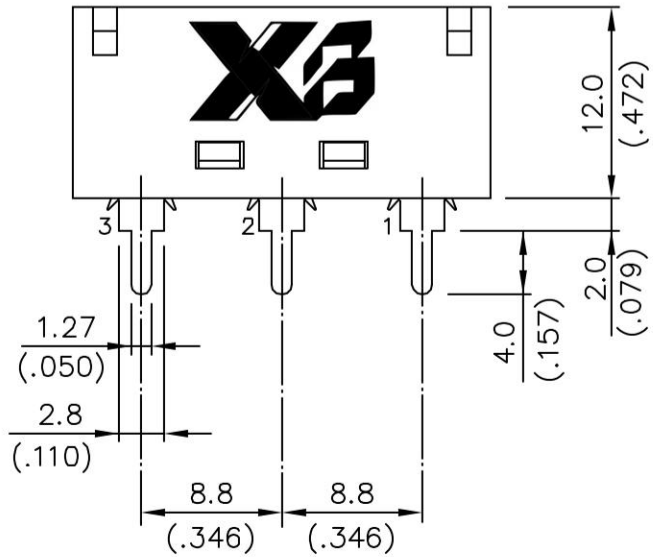
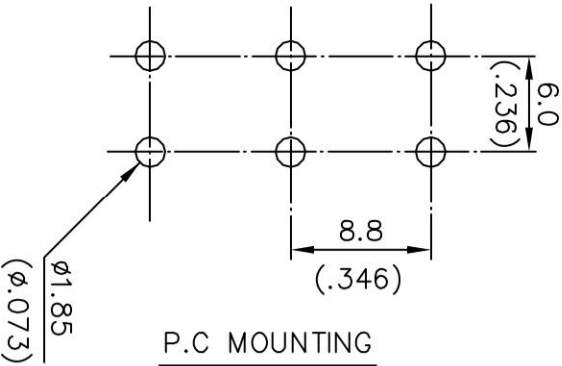



ROHS

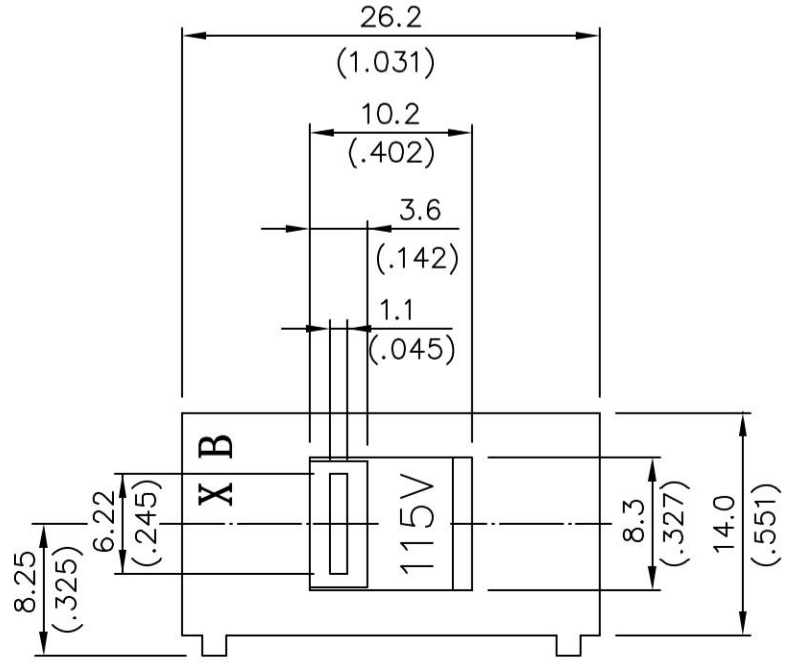

CIRCUIT	: ON - ON (DPDT)
RATING	: 10A 125V AC , 5A 250V AC 5/250 ~ 10/125 ~
CONTACT RESISTANCE	: DC 2-4V 1A 20mΩ OR LESS
INSULATION RESISTANCE	: DC 500V 100MΩ OR MORE
WITHSTAND VOLTAGE	: 1500V AC 1 Min

序号	名称	数量	材料
1	基座	1	PA66
2	推子	1	PA66
3	底板	1	PA66
4			
5	焊脚	6	黄铜电镀
6			
7	弹簧2	4	碳索钢丝
8	跳板	2	黄铜电镀

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

 Switch Connector		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD												
TITLE : XB SLIDE SWITCH						TOLERANCE <=1.5mm±0.1 > 1.5mm±0.2 >=10mm±0.3		ANGLE ±2°		7	SPRING	STEEL WIRE	1	NATURE
MODEL : XB-PBS-110-P										6	STEEL BALL	STEEL	1	NATURE
UNIT : MM		DWN.	ZENQ. CHEN	DATE						5	BOARD	PHENOLIC RESIN	1	NATURE
SCALE : 3 : 1		CHK'D	PENG. GAO	DATE						4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
VERSION		01	APPD.	FEI. LONG. HE	DATE					3	FRAME	IRON STRIP	1	Ni PLATED
										2	TERMINAL	BRASS STRIP	8	Ag PLATED
										1	KNOB	POM	1	BLACK
										NO.	PART NAME	MATERIAL	QTY.	FINISHING