


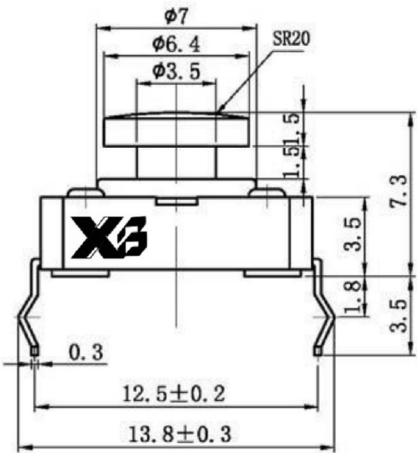
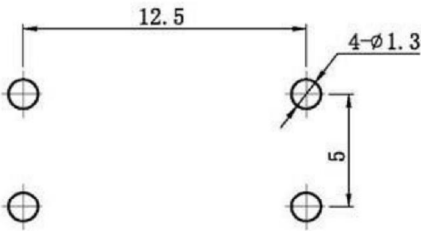


ROHS

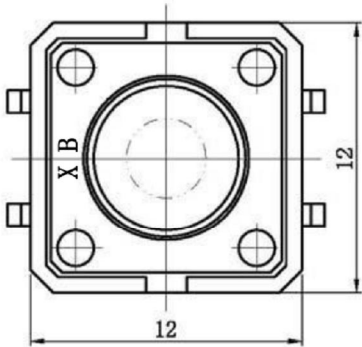

Circuit diagram




P. C. B LAYOUT
BOTTOM VIEW

SPECIFICATIONS:

- 1、Rating: DC12V 50mA
- 2、Contact Resistance: 50mΩ MAX.
- 3、Insulation Resistance: 100MΩ MIN.
- 4、Withstand Voltage: AC 250V for 1 minute
- 5、Travel: 0.3±0.1mm
- 6、Operating Force: 260±50gf
- 7、Life: 1,000,000 Cycles MIN.
- 8、General TOLERANCE: ±0.3mm.

NO.	NAME	MATERIAL	NATIONALITY	QTY.	SURFACE
1	TERMINAL	PPA	CHINA TAIWAN	1	Silver plating
2	CASE	PPA	CHINA TAIWAN	1	Black
3	CONTACT	SUS301	KOREA 1		Contact side silver plating
4	COVER	Brass	CHINA	1	CuSn plating
5	STEM	PPA	CHINA	1	Black

		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD												
		TITLE : XB TACT SWITCH												
		MODEL : XB-TS-1273DF												
UNIT : MM		DWN.	ZENQ. CHEN	DATE		TOLERANCE ≤1.5mm ± 0.1 > 1.5mm ± 0.2 ≥10.0mm ± 0.3	ANGLE TOL ± 2°	8	REEL	PS	1	BLUE		
SCALE : 5 : 1		CHK'D	PENG. GAO	DATE				7	CARRIER	PS	1	CLEAR		
VERSION		APPD.	FEI. LONG. HE	DATE				6	COVER TAPE	PS	1	CLEAR		
								5	CONTACT	PBS STRIP	1	Ag CLAD		
								4	COVER	IRON STRIP	1	Ni PLATED		
								3	CASE	NYLON	1	BLACK		
								2	TERMINAL	BRASS STRIP	2	Ag PLATED		
								1	KNOB	NYLON	1	BLACK		
								NO.	PART NAME	MATERIAL	QTY.	FINISHING		