
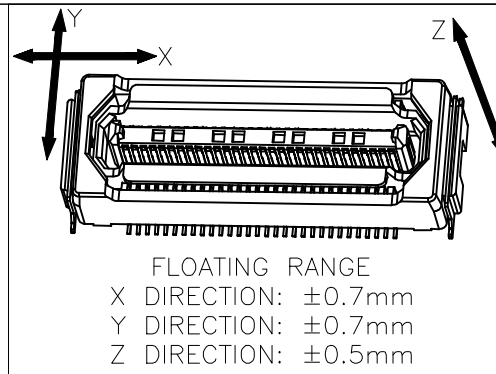


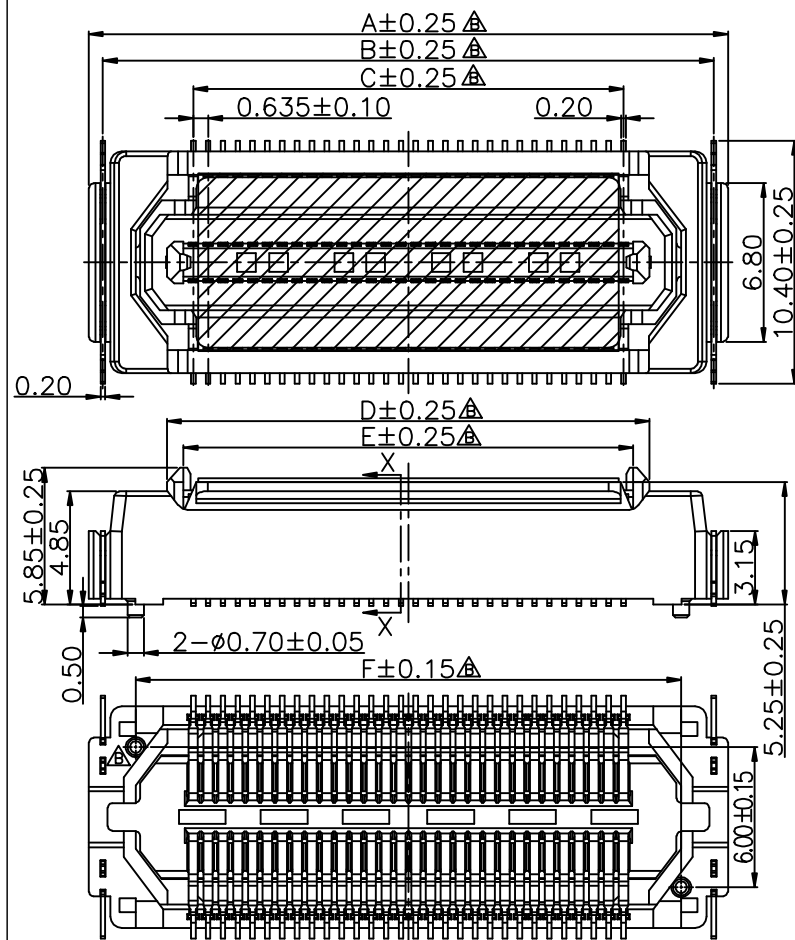


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
A	NEW	INTERIM INITIAL RELEASE.	2020.12.16	Cao Liang
B	△	Add Product Specifications And The cylinders change direction.	2021.02.17	Cao Liang

Specifications
 Current Rating:0.5Amp
 Insulation Resistance:500MΩ Min.
 Dielectric Withstanding Voltage:200VAC
 Contact Resistance:100mΩ Max.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:Phosphor Bronze
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
 All materials must meet GREENCONN hazardous substances control standards.

No. of PIN/ROW	Dimension Information						
	A	B	C	D	E	F	G
2x30	27.35	26.15	18.415	20.65	19.25	23.35	18.00
2x40	33.70	32.50	24.765	27.00	25.60	29.70	24.35

Recommended P.C.Board Layout
 (Tolerance:±0.05)

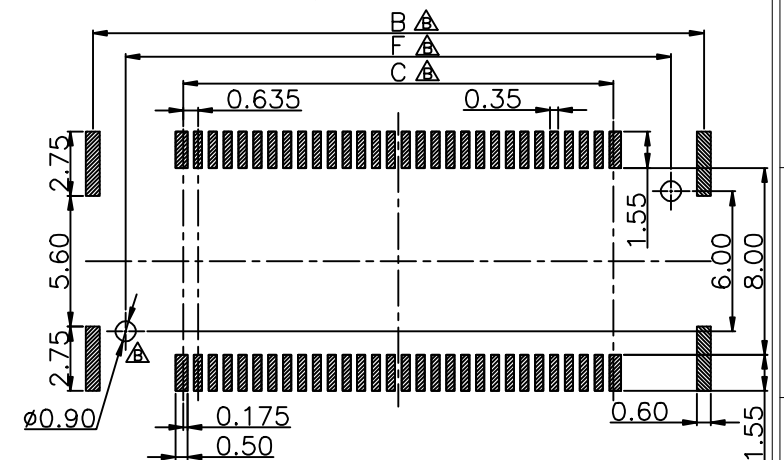

Ordering Information

XB-CGZC-203

No. Of Pins Per Row
30,40

Standard Plating
02=Gold Flash
09/N5=AU plating △

Color
1=Black

Standard Packing
H=Acetate tape+Tape&Reel

东莞市溪榜电子有限公司
 DONG GUAN XI BANG ELECTRONI CS CO., LTD.

3RD.ANG
PROJ.
PAGE. 1/1

GENERAL TOLERANCE	
X'±5.0'	X.±0.30
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.15
.XXX'±1.0'	.XXX±0.10

DESIGNED: Cao Liang
 CHECKED: Qiu Guoyan
 APPROVED: Qiu Guoyan

DATE: 2021.02.17
 DATE: 2021.02.17
 DATE: 2021.02.17

DWG. NO.
XB-CGZC-203
 PART NO.
XB-CGZC-203

TITLE.
0.635mm PITCH BTB
FLOATING CONNECTOR