


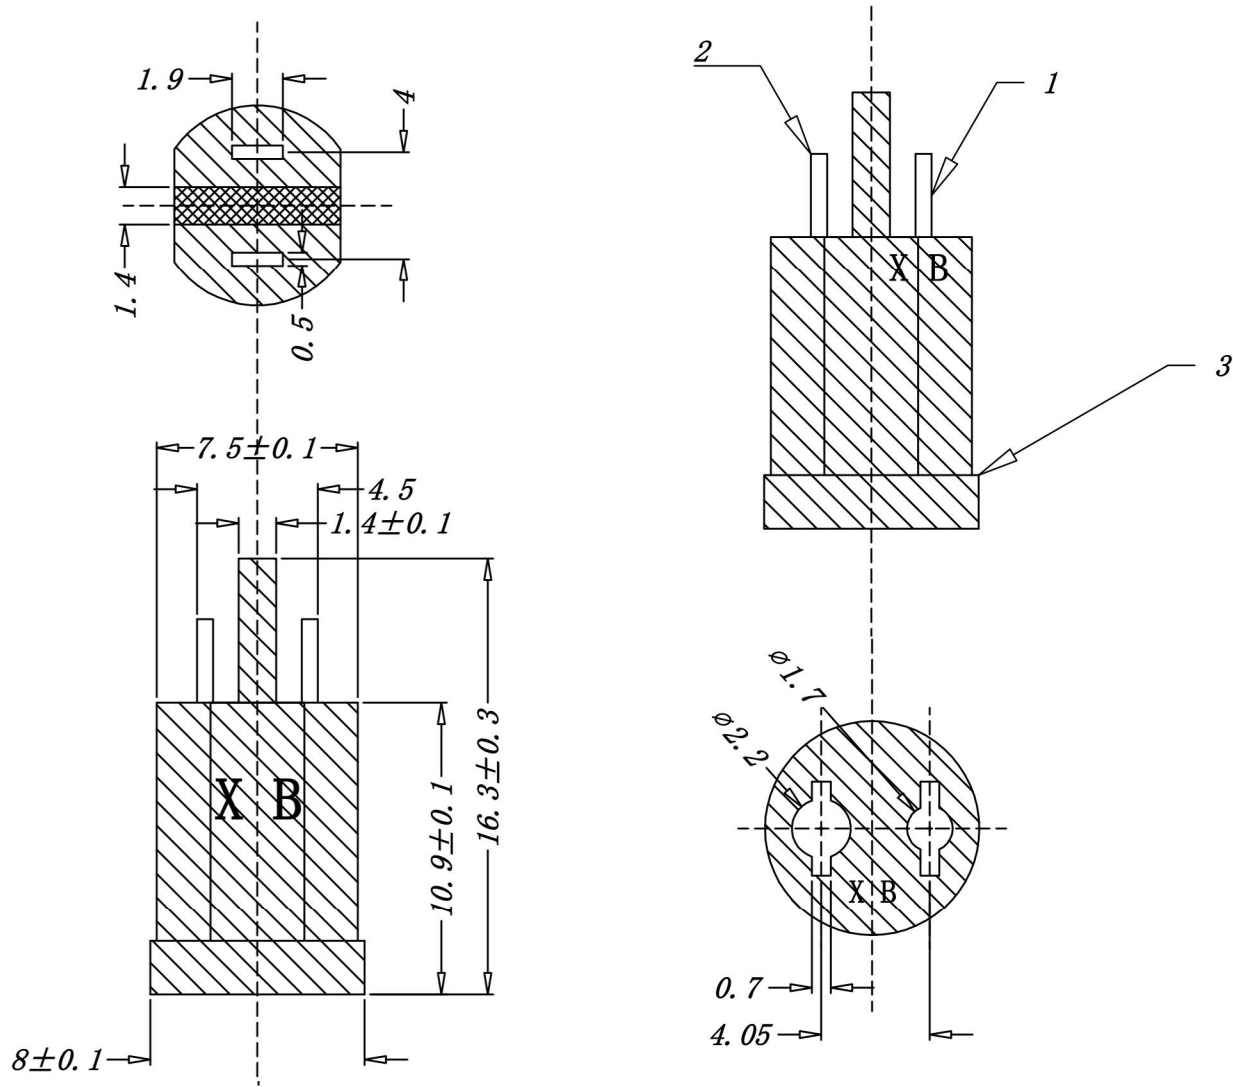

SPECIFICATION

- 1.Rating : DC 12V 30V , 30A 50A
- 2.Contact resistance : $\leq 30m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles

客户要求:

重点尺寸把控标示: ✓

符合ROHS标准

- 1、耐电压:AC500V,1分钟无异状。
- 2、绝缘抵抗:DC500,100M Ω 以上。
- 3、接触抵抗:100MA,30M Ω 以下。
- 4、表面处理:镀镍、扩散良好。
- 5、插拔力0.3-4KG

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

3	绝缘体	PBT加纤25%	黑/白/蓝	
2	PIN	黄铜	镀镍	
1	PIN	铜针	镀镍	
项目	零件名称	材质	处理颜色	零件料号



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : XB DC Power Jack

MODEL : XB-DC-0148-152 DC转接头SP63-10451



UNIT : MM	DWN.	ZENQ. CHEN	DATE		TOLERANCE	ANGLE TOL
SCALE : 3 : 1	CHK'D	DONG. PANG	DATE		$\leq 1.5mm \pm 0.1$	$\pm 2^\circ$
VERSION	01	APPD.	FET. LONG. HE	DATE	$> 1.5mm \pm 0.2$	
					$\geq 10.0mm \pm 0.3$	

6	PIN	BRASS	1	Ni PLATED
5	TERMINAL	BRASS STRIP t=0.3	1	Ag PLATED
4	SPRING TERMINAL C	PBS STRIP t=0.25	1	Ag PLATED
3	TERMINAL B	BRASS STRIP t=0.3	1	Ag PLATED
2	TERMINAL A	BRASS STRIP t=0.3	1	Ag PLATED
1	HOUSING	PBT UL94-V0	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING