


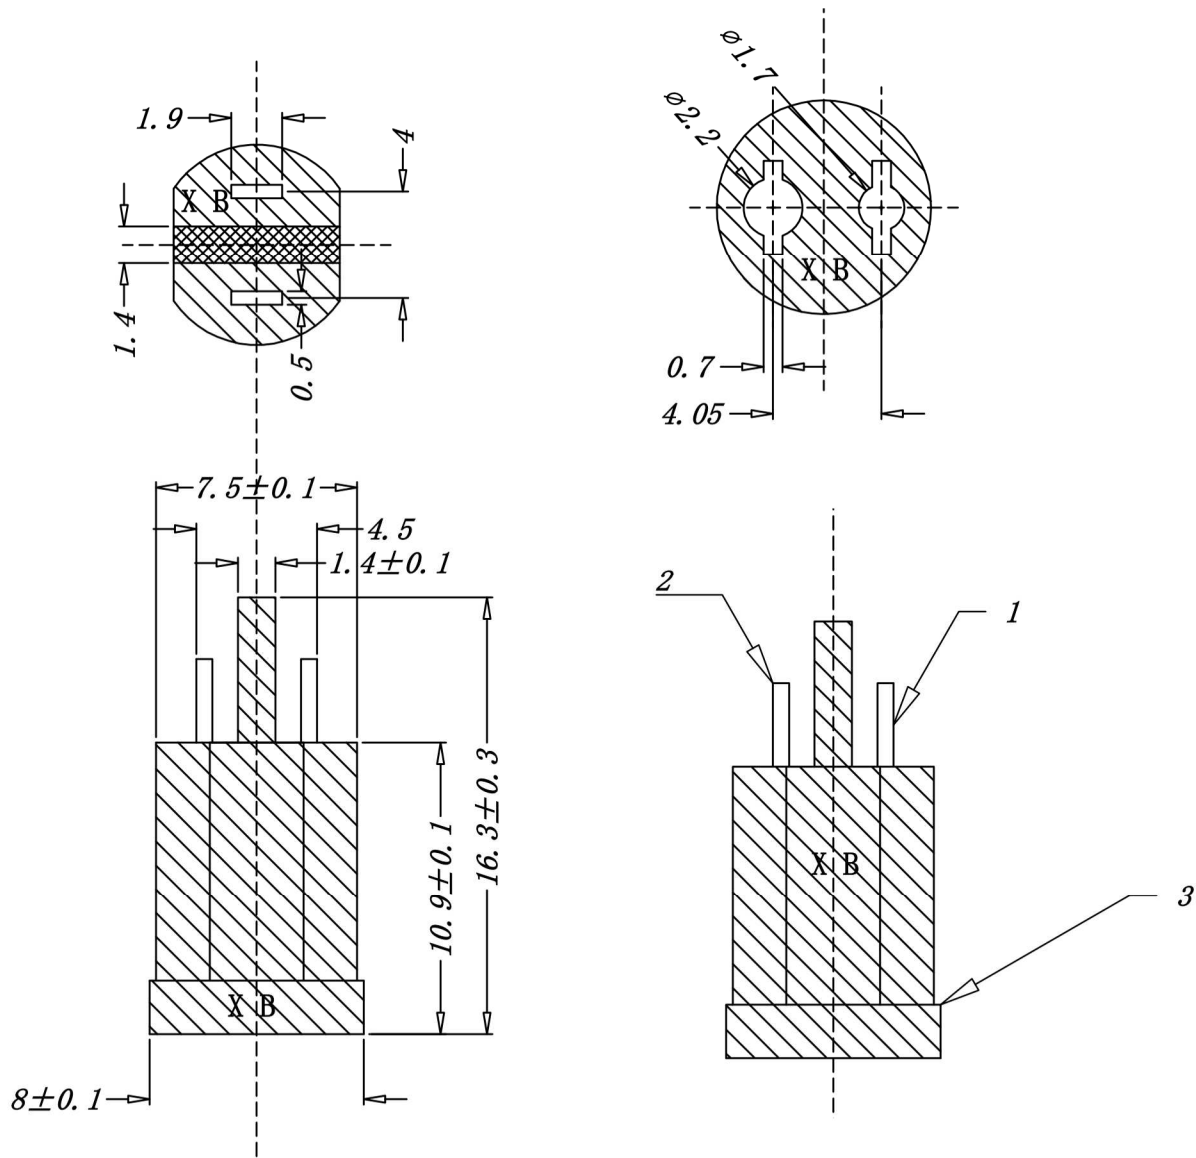

SPECIFICATION

- 1.Rating : DC 12V 30V , 30A 50A
- 2.Contact resistance : $\leq 30\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles

客户要求:

重点尺寸把控标示:



符合ROHS标准

1. 耐电压:AC500V,1分钟无异状。
2. 绝缘抵抗:DC500,100M Ω 以上。
2. 接触抵抗:100MA,30M Ω 以下。
3. 表面处理:镀镍、扩散良好。
5. 插拔力0.3-4KG

3	绝缘体	PBT加纤25%	黑/白/蓝	
2	PIN	黄铜	镀镍	
1	PIN	铜针	镀镍	
项目	零件名称	材质	处理颜色	零件料号



东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : XB DC Power Jack

MODEL : XB-DC-1722-X2 2孔圆形DC母座防呆8x10.9x16.3mm



TOLERANCE
 $\leq 1.5\text{mm} \pm 0.1$
 $> 1.5\text{mm} \pm 0.2$
 $\geq 10.0\text{mm} \pm 0.3$

ANGLE TOL
 $\pm 2^\circ$

UNIT : MM	DWN.	ZENQ. CHEN	DATE	
SCALE : 3 : 1	CHK'D	DONG. PANG	DATE	
VERSION 01	APPD.	FET. LONG. HE	DATE	

6	PIN	BRASS	1	Ni PLATED
5	TERMINAL	BRASS STRIP t=0.3	1	Ag PLATED
4	SPRING TERMINAL C	PBS STRIP t=0.25	1	Ag PLATED
3	TERMINAL B	BRASS STRIP t=0.3	1	Ag PLATED
2	TERMINAL A	BRASS STRIP t=0.3	1	Ag PLATED
1	HOUSING	PBT UL94-V0	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING