
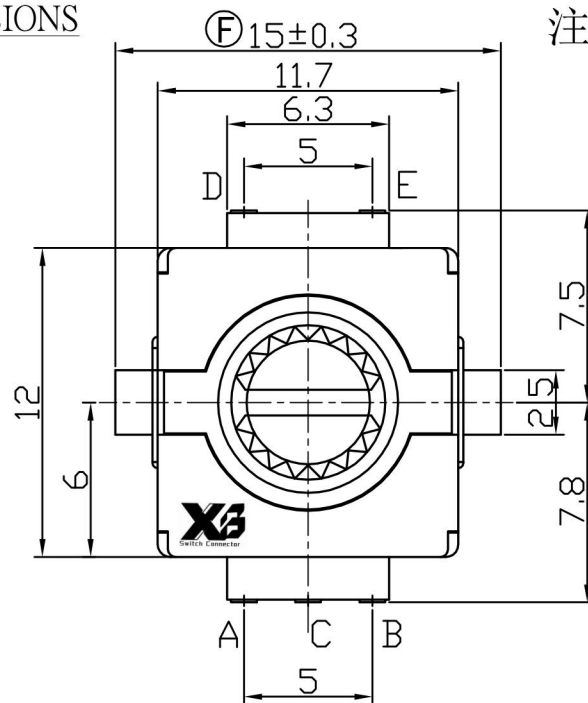



ROHS

DIMENSIONS


注：1、A-F为品管重点管控尺寸。

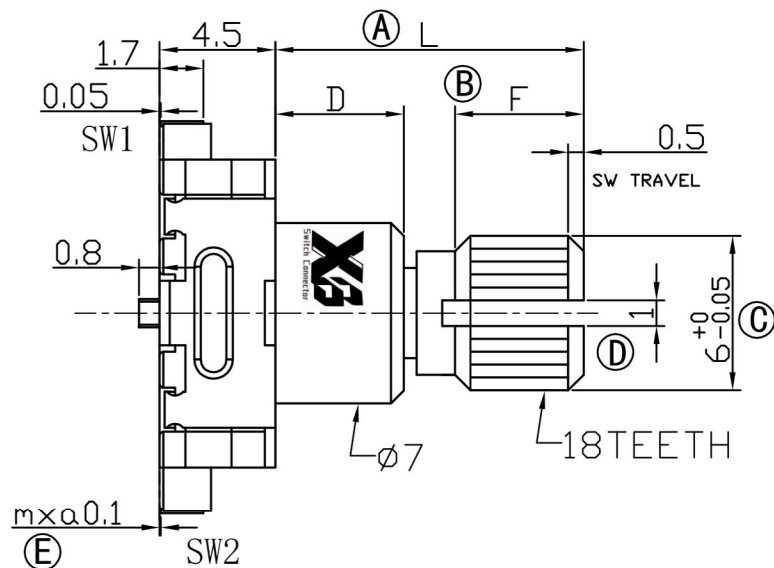

(SW02)CIRCUIT DIAGRAM



(SW01) ENCODER
(SW02) PUSH ON SW
CLICK Position

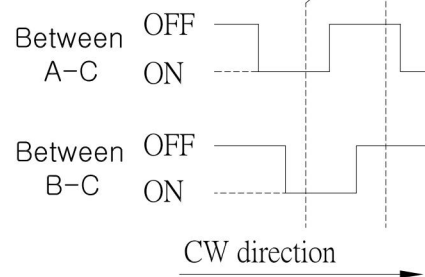

(SW01) OUTPUT


L	8
F	3

☒		
2	D=5.0	
4	D=7.0	
8	D=3.5	✓

SPECIFICATION (INITIAL)

RATING: DC 5V 0.5mA 10mA
ANGLE: FULL ROTATION ANGLE: 360 DEGREES
CONTACT RESIS TANCE: 100mΩ max
INSULATION RESISTANCE: 100MΩ DC 250V 1mA
WITHSTAND VOLTAGE: 300V AC/min or
OPERATION FORCE: 6 ± 3N 600gf ± 300gf
SWITCHING LIFE: 20,000 cycles

P.C.BOARD MOUNTING HOLE DIMENSIONS

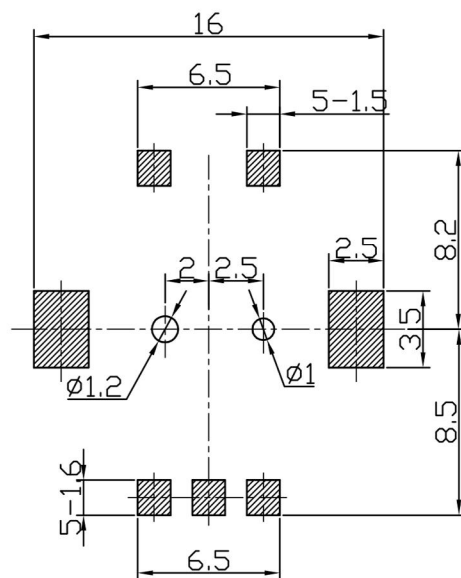

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle ± 0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY: GAO PENG
CHECKED BY: PANG DONG
APPROVED BY: HE. LONG. FEI

DATE: 07/23/13
DATE: 07/23/13
DATE: 07/23/13

MAT'L
FINISH
SCALE: 1 : 1
SHEET NO. 1 of 1

TITLE: ENCODER
MODLE: ENCODER W/I SWITCH
DWG NO. XB-EC-1106S-D8-K8
PART NO. XB-EC-1106S-D8-K8

SIZE: A4
VER: R2

2	公差及料號更新	Jack	072313
1	圖面更新	Frank Wu	021012
ITEM NO.	DESCRIPTION	DRAWN	DATE