

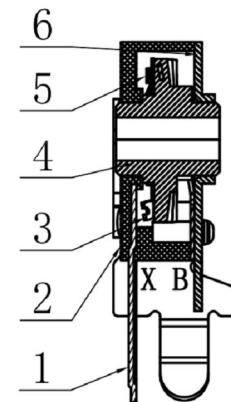
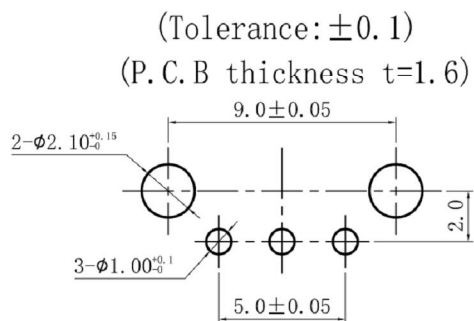
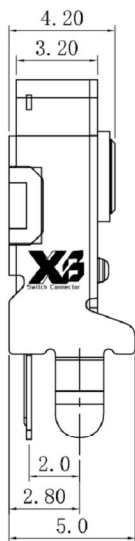
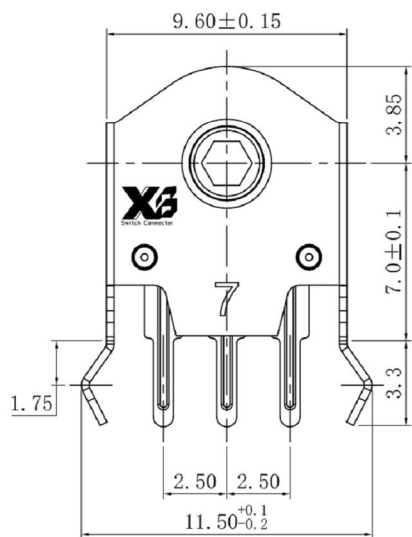
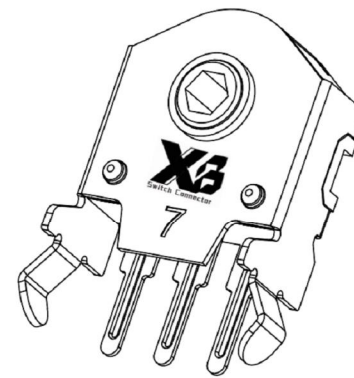
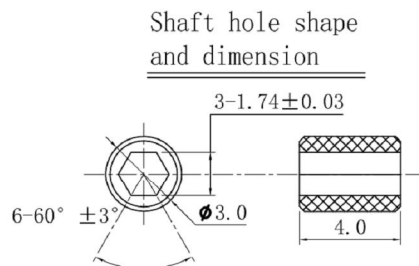
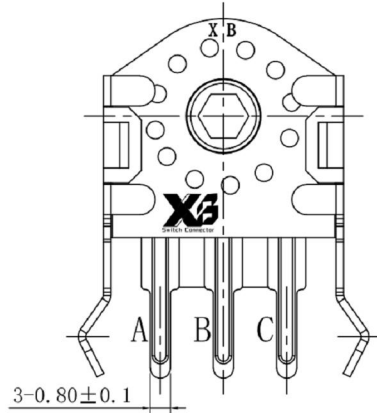


ROHS

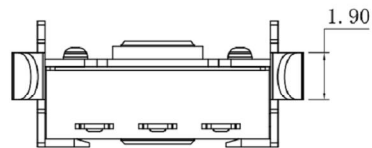

6	Cover	Sheet iron	-----	Nickel Plated
5	Anchor Plate	SUS	-----	-----
4	Wheel gear	POM	Black	-----
3	Spring	Copper alloy	-----	-----
2	Base	PA66	Black	-----
1	Terminal	Brass	-----	Silver Plated
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

气候等级 Climate grade	额定值 Rated values	接触电阻 Contact resistance	耐 压 Dielectric strength	绝缘电阻 Insulation resistance	按压力 Operating force	行 程 Travel	寿 命 Life
~30℃~+85℃	Max50 mA12V DC Min10 mA12V DC	≤50m Ω	100V AC 1Min	≥100M Ω	10gf±5gf	0.15±0.05	100000次

X3 东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY: GAO. PENG
CHECKED BY: PANG. DONG
APPROVED BY: YANG. JUN

DATE 02/24/23
DATE 02/24/23
DATE 02/24/23

MAT'L		TITLE	ENCODER
FINISH		MODLE	增量编码开关 旋转式
SCALE	1 : 1	DWG NO.	XB-EN-12
SHEET NO.	1 of 1	PART NO.	9. 6x4. 2x10. 85mm
			SIZE A4
			VER R