
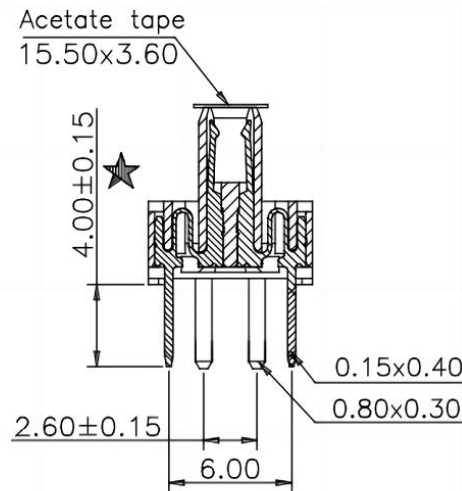


FLOATING RANGE
X DIRECTION: $\pm 0.5\text{mm}$
Y DIRECTION: $\pm 0.5\text{mm}$
Z DIRECTION: $\pm 0.5\text{mm}$

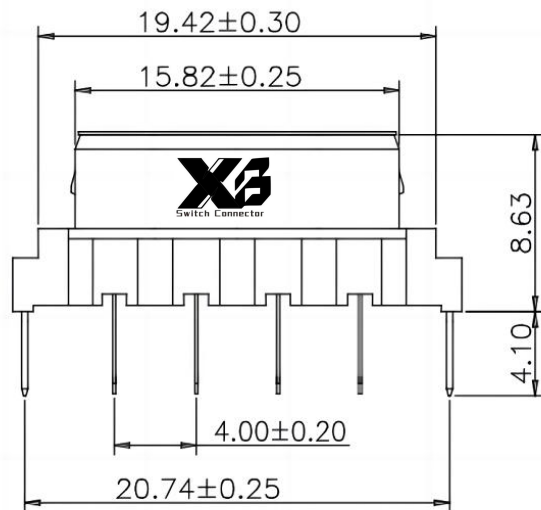

Specifications
Current Rating: 1.0Amp
Insulation Resistance: 500M Ω Min.
Dielectric Withstanding Voltage: 250VAC
Contact Resistance: 100m Ω Max.
Operating Temperature: -40°C to $+105^{\circ}\text{C}$
Materials
Contact Material: Phosphor Bronze
Insulator Material: High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material

★ All materials must meet XI BANG hazardous substances control standards.

★: Critical Characteristics.


indicates product characteristics, functionalities, and manufacturing processes regarding to customer's specifications

★: Safety Features

indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government

與GBZZ202系列配對使用

Recommended P.C.Board Layout
(Tolerance: ± 0.05)

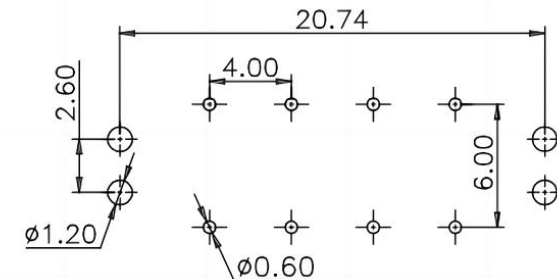


Ordering Information

202 - 04 XX A 001 C 1 S X
No. of Pins per Row 04
Standard Plating 08=5u"gold on contact/
gold flash on other area
Color 1=Black
Standard Packing H=Acetate tape+Tape&Reel

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.* $\pm 5.0^{\circ}$	X. ± 0.30
.X.* $\pm 3.0^{\circ}$	.X. ± 0.25
.XX.* $\pm 2.0^{\circ}$	.XX. ± 0.15
.XXX.* $\pm 1.0^{\circ}$	.XXX. ± 0.10

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

XB-GBZZ-202

PART NO.

XB-GBZZ-202

TITLE.

4.00mm PITCH FEMALE
FLOATING CONNECTOR
MATING H25.00mm