

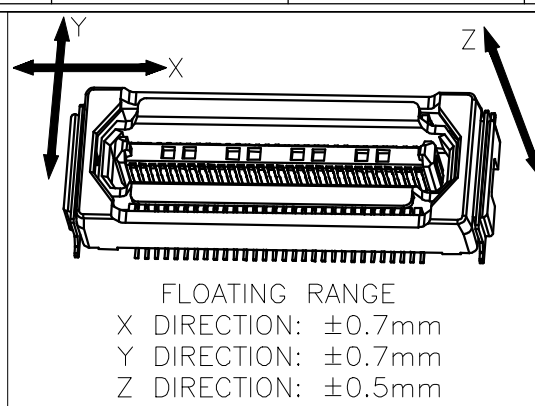
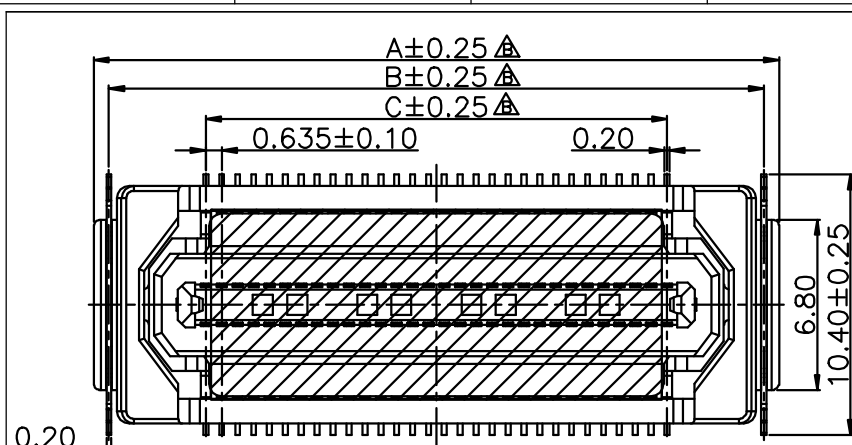
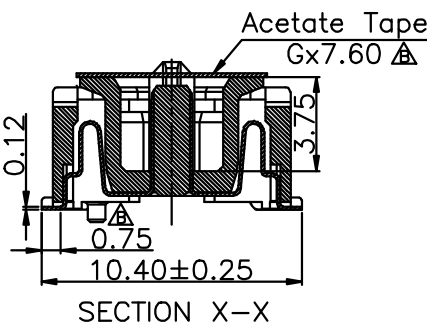





REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
A	NEW	INTERIM INITIAL RELEASE.	2020.12.16	Cao Liang
B	△	Add Product Specifications And The cylinders change direction.	2021.02.17	Cao Liang

Specifications
 Current Rating:0.5Amp
 Insulation Resistance:500MΩ Min.
 Dielectric Withstanding Voltage:200VAC
 Contact Resistance:100mΩ Max.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:Phosphor Bronze
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
 All materials must meet XI BANG hazardous substances control standards.

No. of PIN/ROW	Dimension Information						
	A	B	C	D	E	F	G
2x30	27.35	26.15	18.415	20.65	19.25	23.35	18.00
2x40	33.70	32.50	24.765	27.00	25.60	29.70	24.35

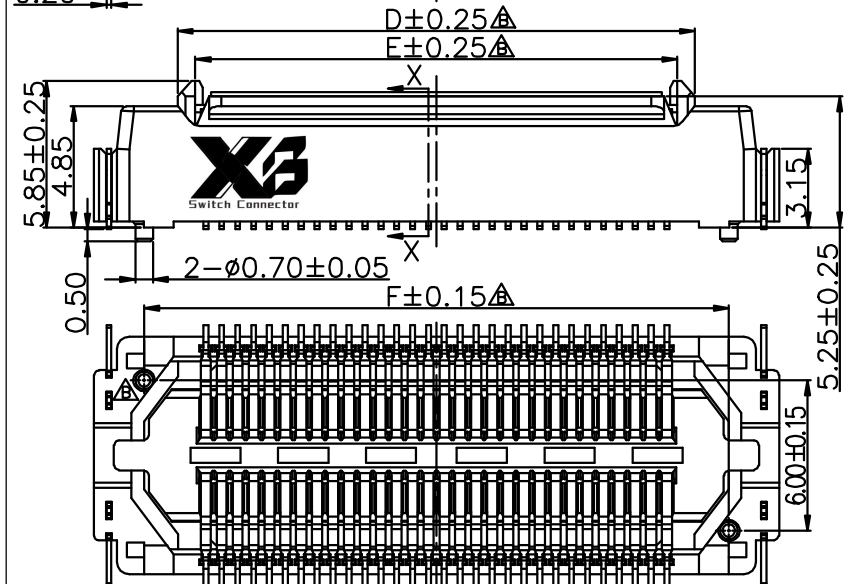

Recommended P.C.Board Layout
 (Tolerance:±0.05)

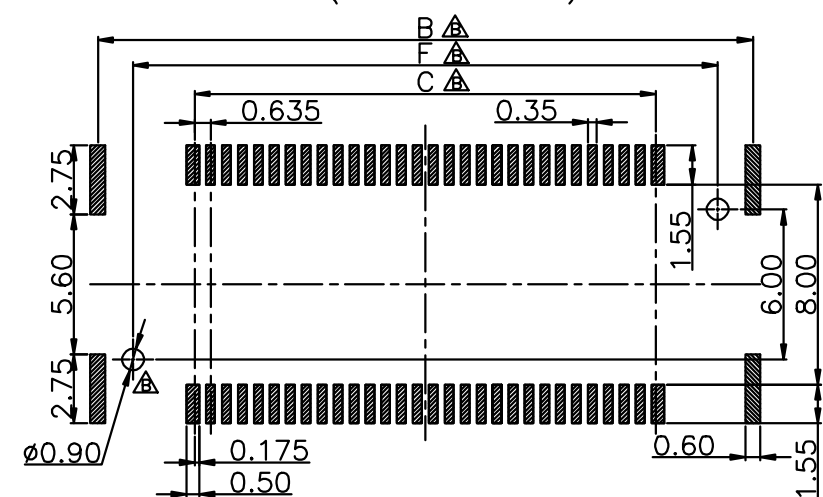

Ordering Information

201 - XX XX B 001 C 1 S X

No. Of Pins Per Row 30,40
 Standard Plating 02=Gold Flash
 09/N5=AU plating △
 Color 1=Black
 Standard Packing H=Acetate tape+Tape&Reel

东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			3RD.ANG PROJ. 1/1		GENERAL TOLERANCE X:±5.0° X:±0.30 .X:±3.0° .X:±0.25 .XX:±2.0° .XX:±0.15 .XXX:±1.0° .XXX:±0.10		DESIGNED:	DATE:	DWG. NO. XB-CGZC-203 PART NO.	TITLE. 0.635mm PITCH BTB FLOATING CONNECTOR
REV. B	UNIT. mm	SCALE. 3:1					CHECKED:	DATE:		
							APPROVED:	DATE:		