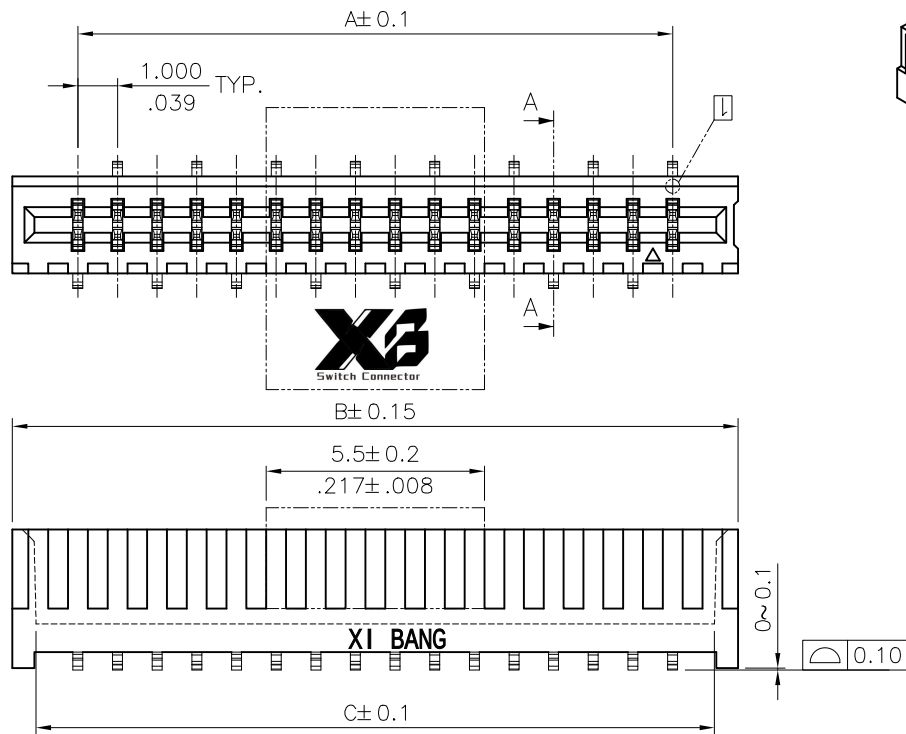



Material :

- * Body : Nylon 46 +40% G.F. UL 94V-0
- * Contact : Phosphor Bronze

Ordering Code

CF08 ** 1 M 1 R N
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② No. of Circuits
- ③ Plating code:
1 = Tin plated over Nickel
- ④ Contact style: M = Straight SMT Type
- ⑤ Color: 1 = Black
- ⑥ Packing options: R = Tape & Reel
- ⑦ Other options: 0 = Standard (With Pad)
N = Without Pad

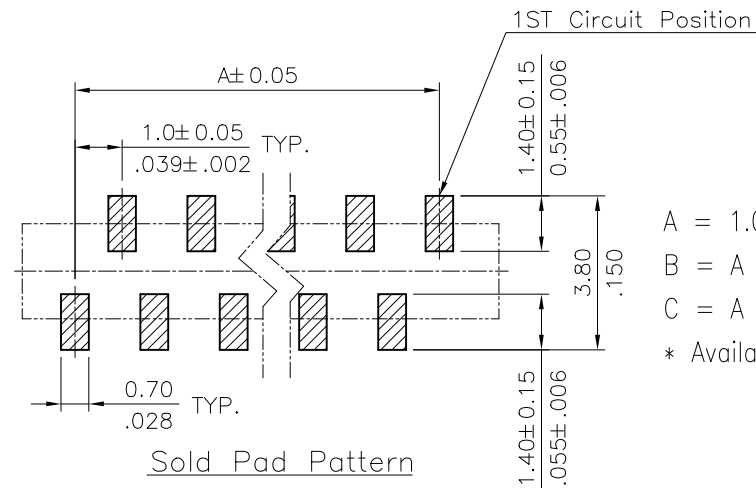


A = 1.0 * No. of Spaces


B = A + 3.3

C = A + 2.1

* Available in 4 through 32 circuits

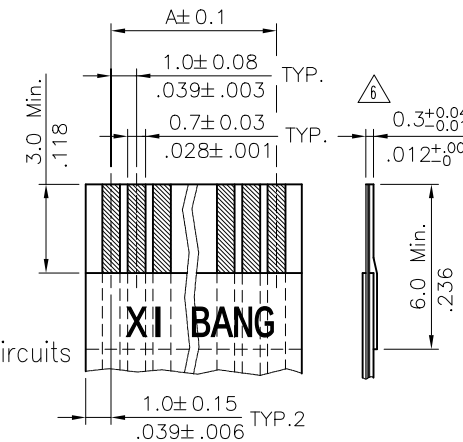

Accommodated FFC

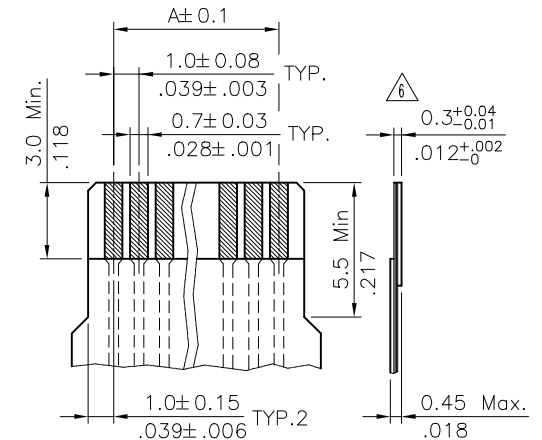

Accommodated FPC

Tin-Lead Process


RoHS Compliant

⑨	Sandy	6/14-16'	ECRB116027/ECNT116108		DATE	UNIT: mm / inch	TITLE: 1.00mm ST. SMT TYPE
⑧	Sun	1/18-16'	ECRB115071/ECNT116004	DRAWN BY:	Sandy	6/14-16'	LIF FFC/FPC CONN.
⑦	Karen	6/04-12'	ECN12095-0/ECR12033-1	ENGINEER:	Sun	6/15-16'	MATERIAL:
⑥	Sandy	9/22-07'	ECN07381/ECR07065-1	CHECKED BY:	Eisley	6/16-16'	FINISH:
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	6/16-16'	



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONI CS CO., LTD.



DRAWING NO.	CF0811SJ	PART NO.	CF08**1M1R0 CF08**1M1RN
SCALE	5 / 1	SHEET	1 OF 2

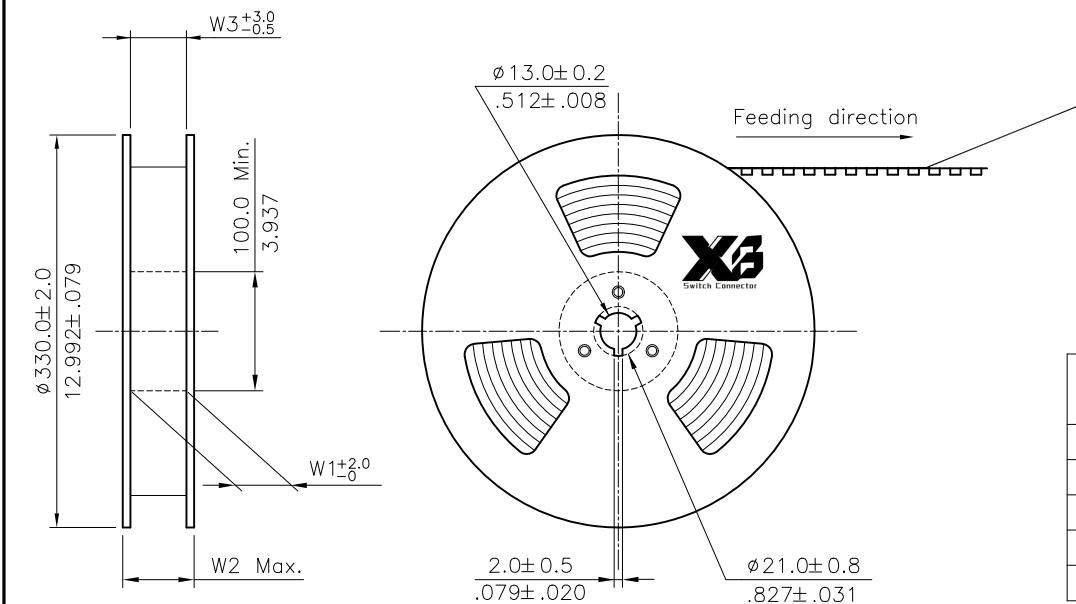


NOTE :

- * Reel Material : Corrugated Paper
- * Carrier Material : Clear Conductive Polystyrene Alloy
- * Cover Tape Material : Polyester
- * Cover Tape Peel Strength : 0.1N – 1.3N
- * Carrier camber is within 1mm in 100mm
- * All dimensions meet EIA-481-2 & EIA-481-3 requirements.
- * Quantity : 1200 PCS/Reel

Circuits	Dimension					Packing (Reel/Carton)
	E	F	W1	W2	W3	
4~5	16.0(.630)	—	16.5(.650)	22.5(.886)	16.5(.650)	11
6~15	24.0(.945)	—	24.5(.965)	30.5(1.201)	24.5(.965)	9
16~17	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
18~30	44.0(1.732)	40.40(1.591)	44.5(1.752)	50.5(1.988)	44.5(1.752)	5
31~32	56.0(2.205)	52.40(2.063)	56.5(2.224)	62.5(2.460)	56.5(2.224)	4

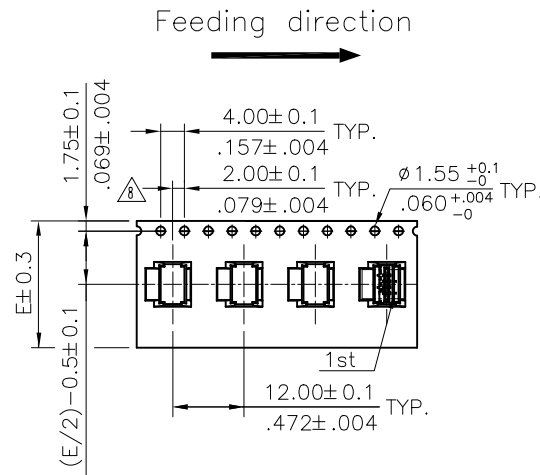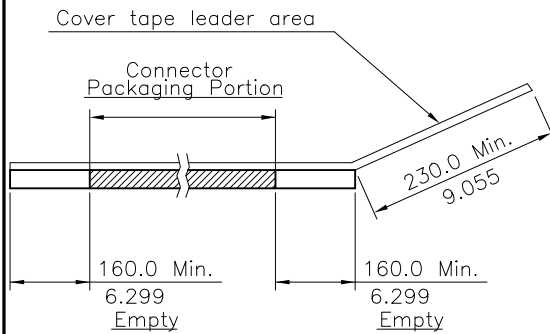



WIDTH : 16, 24mm Carrier

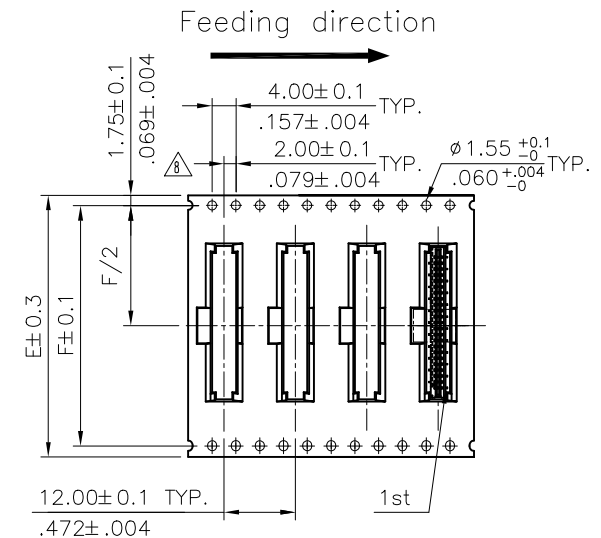

WIDTH : 32, 44, 56mm Carrier

RoHS Compliant

9	Sandy	6/14-16'	ECRB116027/ECNT116108		DATE	UNIT: mm / inch	TITLE: 1.00mm ST. SMT TYPE LIF FFC/FPC CONN.	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
8	Sun	1/18-16'	ECRB115071/ECNT116004	DRAWN BY:	Sandy	6/14-16'					
7	Karen	6/04-12'	ECN12095-0/ECR12033-1	ENGINEER:	Sun	6/15-16'	MATERIAL:	DRAWING NO. CF0811SJ PART NO. CF08**1M1R0 CF08**1M1RN	SHEET 2 OF 2	SCALE	
6	Sandy	9/22-07'	ECN07381/ECR07065-1	CHECKED BY:	Eisley	6/16-16'	CUSTOMER:				
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	6/16-16'					

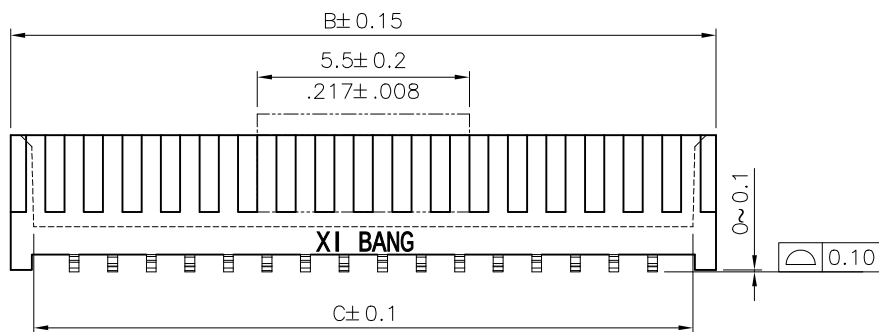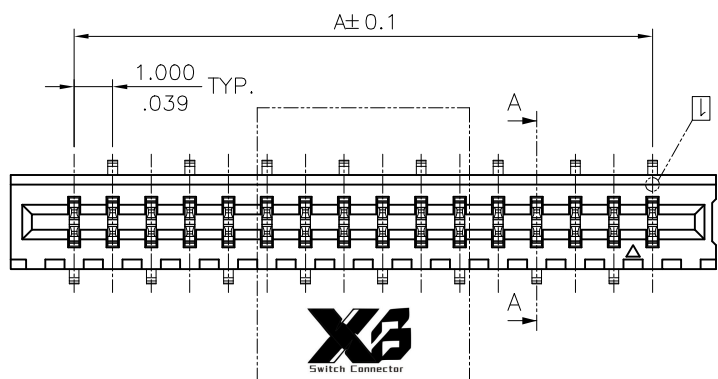

A = 1.0 * No. of Spaces

B = A + 3.3

C = A + 2.1

* Available in 4 through 32 circuits

Note :

1. Material :

* Body : Nylon 6T With 30% GF. UL 94-0
Color Black

* Contact : Copper alloy

2. For Lead Free IR Reflow Process

Ordering Code

CF08 ** 1 M 1 * 0 -NH
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No.

② No. of Circuits

③ Plating code:

1 = 3.05μm(120μ") Min. Matte Tin
over 1.27μm(50μ") Nickel

④ Contact style: M = Straight SMT Type

⑤ Color: 1 = Black



⑥ Packing options:

T = Tube Packing(Without PAD)


R = Tape & Reel Packing(With PAD)

⑦ Other options: 0 = Standard


⑧ -NH = For Lead Free IR Process
& Halogen Free

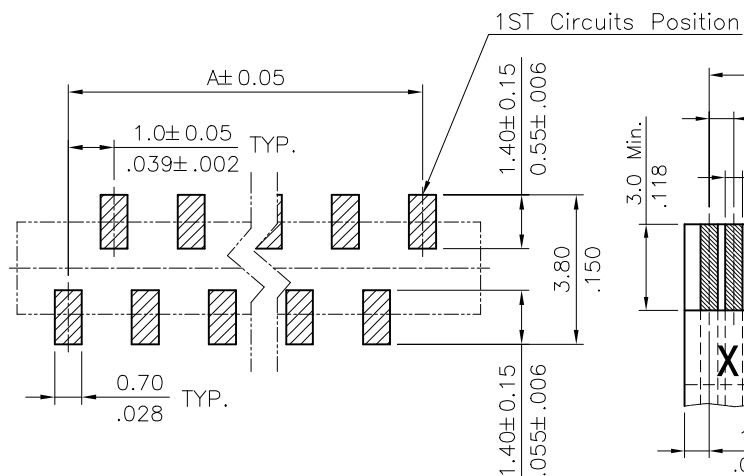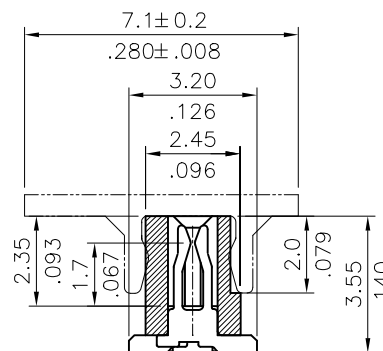

Sold Pad Pattern

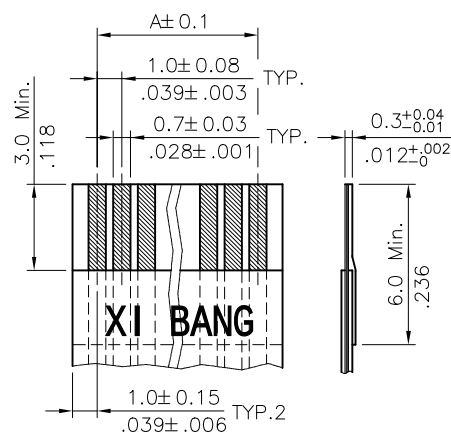

Accommodated FFC

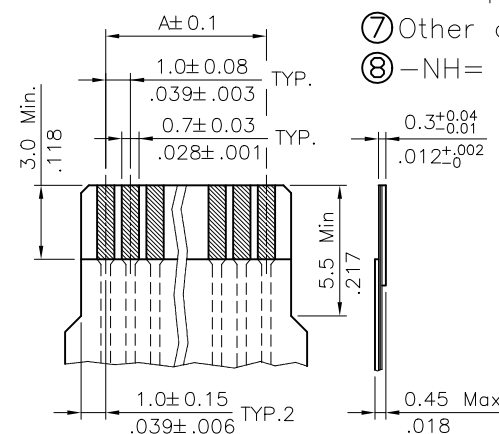


Accommodated FPC

Halogen-Free

Lead Free Process

RoHS Compliant

4					DATE	UNIT: mm / inch		TITLE: 1.00mm ST. SMT TYPE LIF FFC/FPC CONN.		X3 Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			
3				DRAWN BY: Sun	9/30-16'	TOLERANCE UNLESS OTHERWISE SPECIFIED					MATERIAL:		
2				ENGINEER: Sun	9/30-16'			.X ± 0.15/.006 X' ± 1'					
1				CHECKED BY: Eisley	10/3-16'	.XX ± 0.10/.004 X' ±	FINISH:		DRAWING NO.		CF0834SA	PART NO.	CF08**1M1*0-NH
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	10/3-16'	.XXX ± 0.05/.002 .XX' ±			SCALE		5 / 1	SHEET	1

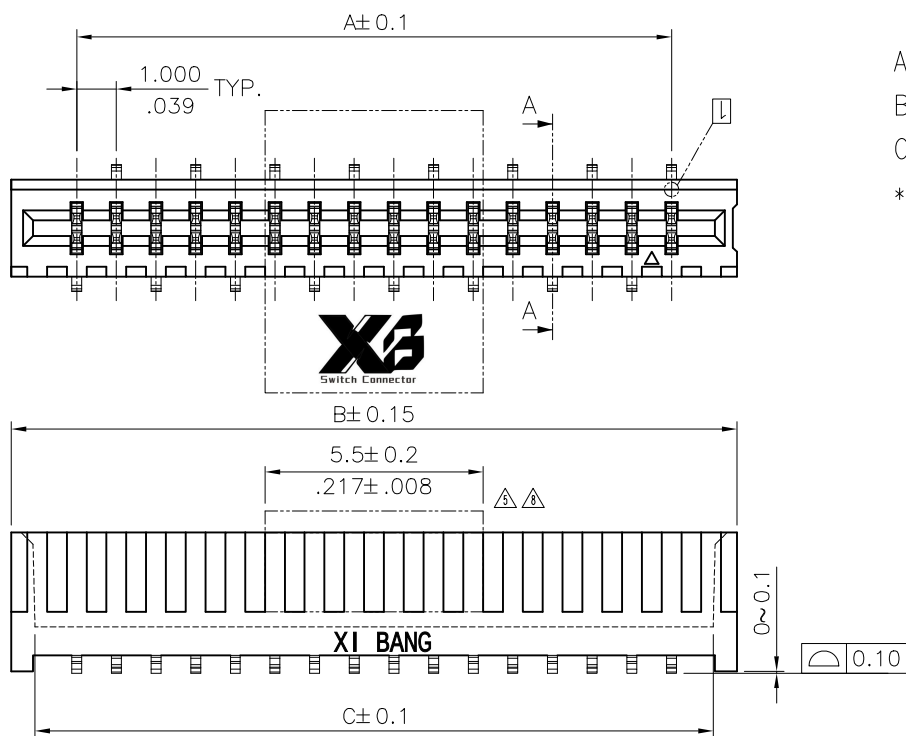

A = 1.0 * No. of Spaces
 B = A + 3.3
 C = A + 2.1
 * Available in 4 through 32 circuits




Note :

1. Material :
 - * Body : Nylon 6T With 30% GF. UL 94-0 Color Black
 - * Contact : Copper alloy
2. For Lead Free IR Reflow Process

Ordering Code

CF08 ** 1 M 1 * 0 -LF
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧


- ① Series No.
- ② No. of Circuits
- ③ Plating code:
 1 = 3.05μm(120μ") Min. Matte Tin
 over 1.27μm(50μ") Nickel
- ④ Contact style: M= Straight SMT Type
- ⑤ Color: 1= Black
- ⑥ Packing options:
 T= Tube Packing(Without PAD)
 R= Tape & Reel Packing(With PAD)
- ⑦ Other options: 0= Standard
- ⑧ -LF= For Lead Free IR Reflow Process

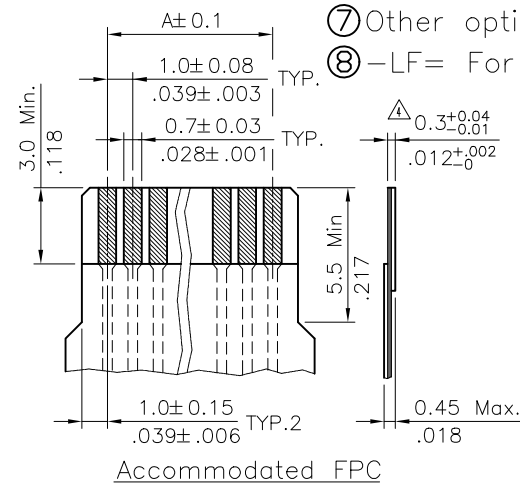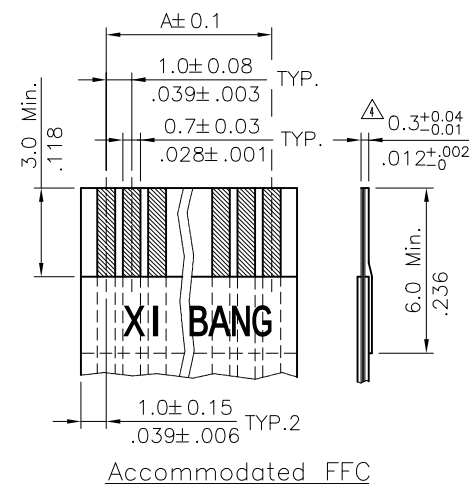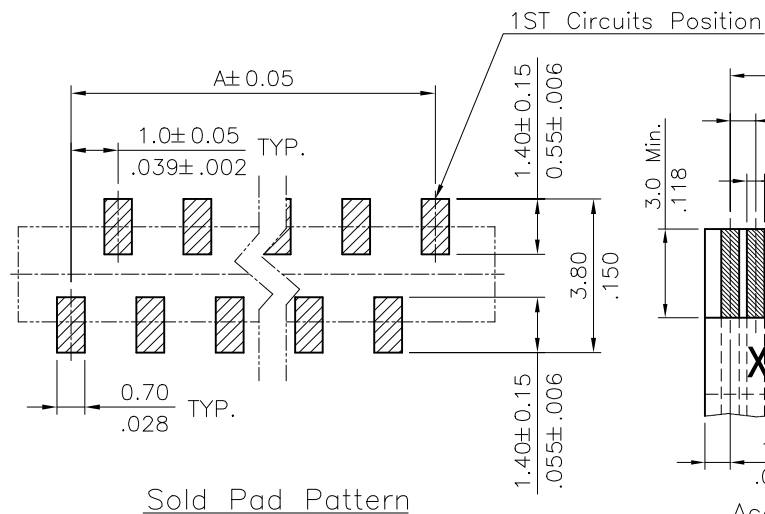

Lead Free Process

RoHS Compliant




⑧	Sandy	6/14-16'	ECRB116027/ECNT116108		DATE	UNIT: mm / inch	TITLE: 1.00mm ST. SMT TYPE
⑦	Sun	1/18-16'	ECRB115071/ECNT116004	DRAWN BY:	Sandy	6/14-16'	LIF FFC/FPC CONN.
⑥	Karen	6/04-12'	ECN12095-0/ECR12033-1	ENGINEER:	Sun	6/15-16'	MATERIAL:
⑤	Karen	11/09-09'	ECN09535	CHECKED BY:	Eisley	6/16-16'	FINISH:
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	6/16-16'	
							TOLERANCE UNLESS OTHERWISE SPECIFIED
							.X ± 0.15/.006 X' ± 1'
							.XX ± 0.10/.004 .X' ±
							.XXX ± 0.05/.002 .XX' ±
				 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
DRAWING NO.		CF0816SI		PART NO.		CF08**1M1*0-LF	
SCALE		5 / 1		SHEET		1 OF 2	

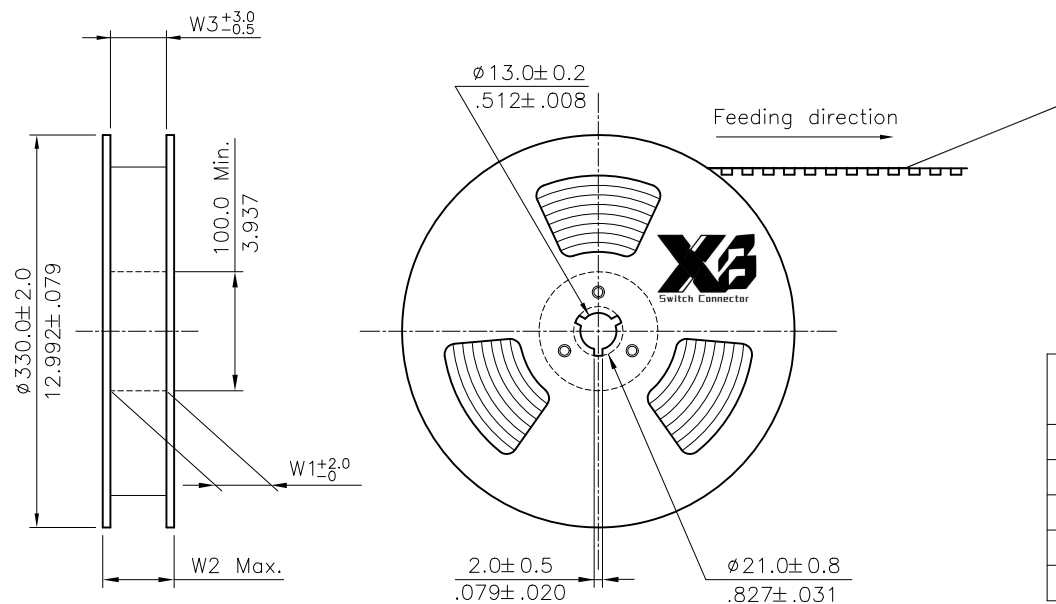

NOTE :

- * Reel Material : Corrugated Paper
- * Carrier Material : Clear Conductive Polystyrene Alloy
- * Cover Tape Material : Polyester
- * Cover Tape Peel Strength : 0.1N – 1.3N
- * Carrier camber is within 1mm in 100mm
- * All dimensions meet EIA-481-2 & EIA-481-3 requirements.
- * Quantity : 1200 PCS/Reel

Circuits	Dimension					Packing (Reel/Carton)
	E	F	W1	W2	W3	
4~5	16.0(.630)	—	16.5(.650)	22.5(.886)	16.5(.650)	11
6~15	24.0(.945)	—	24.5(.965)	30.5(1.201)	24.5(.965)	9
16~17	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
18~30	44.0(1.732)	40.40(1.591)	44.5(1.752)	50.5(1.988)	44.5(1.752)	5
31~32	56.0(2.205)	52.40(2.063)	56.5(2.224)	62.5(2.460)	56.5(2.224)	4

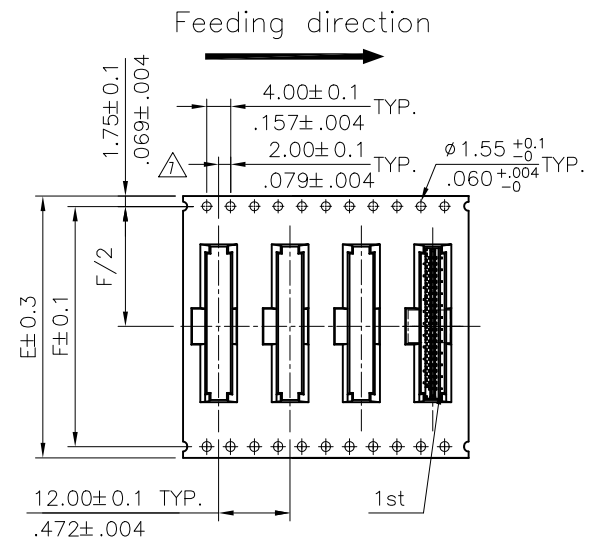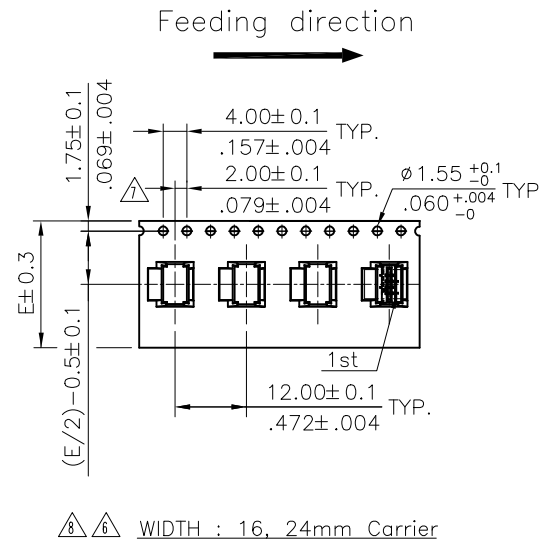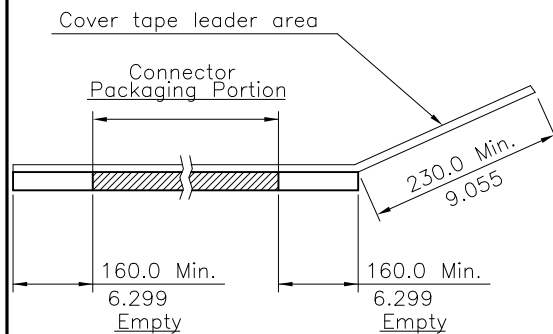

RoHS Compliant

8	Sandy	6/14-16'	ECRB116027/ECNT116108		DATE	UNIT: mm / inch	TITLE: 1.00mm ST. SMT TYPE
7	Sun	1/18-16'	ECRB115071/ECNT116004	DRAWN BY:	Sandy	6/14-16'	LIF FFC/FPC CONN.
6	Karen	6/04-12'	ECN12095-0/ECR12033-1	ENGINEER:	Sun	6/15-16'	MATERIAL:
5	Karen	11/09-09'	ECN09535	CHECKED BY:	Eisley	6/16-16'	CUSTOMER:
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	6/16-16'	SCALE

X3 东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD.

DRAWING NO.	CF0816SI	PART NO.	CF08**1M1*0-LF
SCALE		SHEET	2 OF 2