

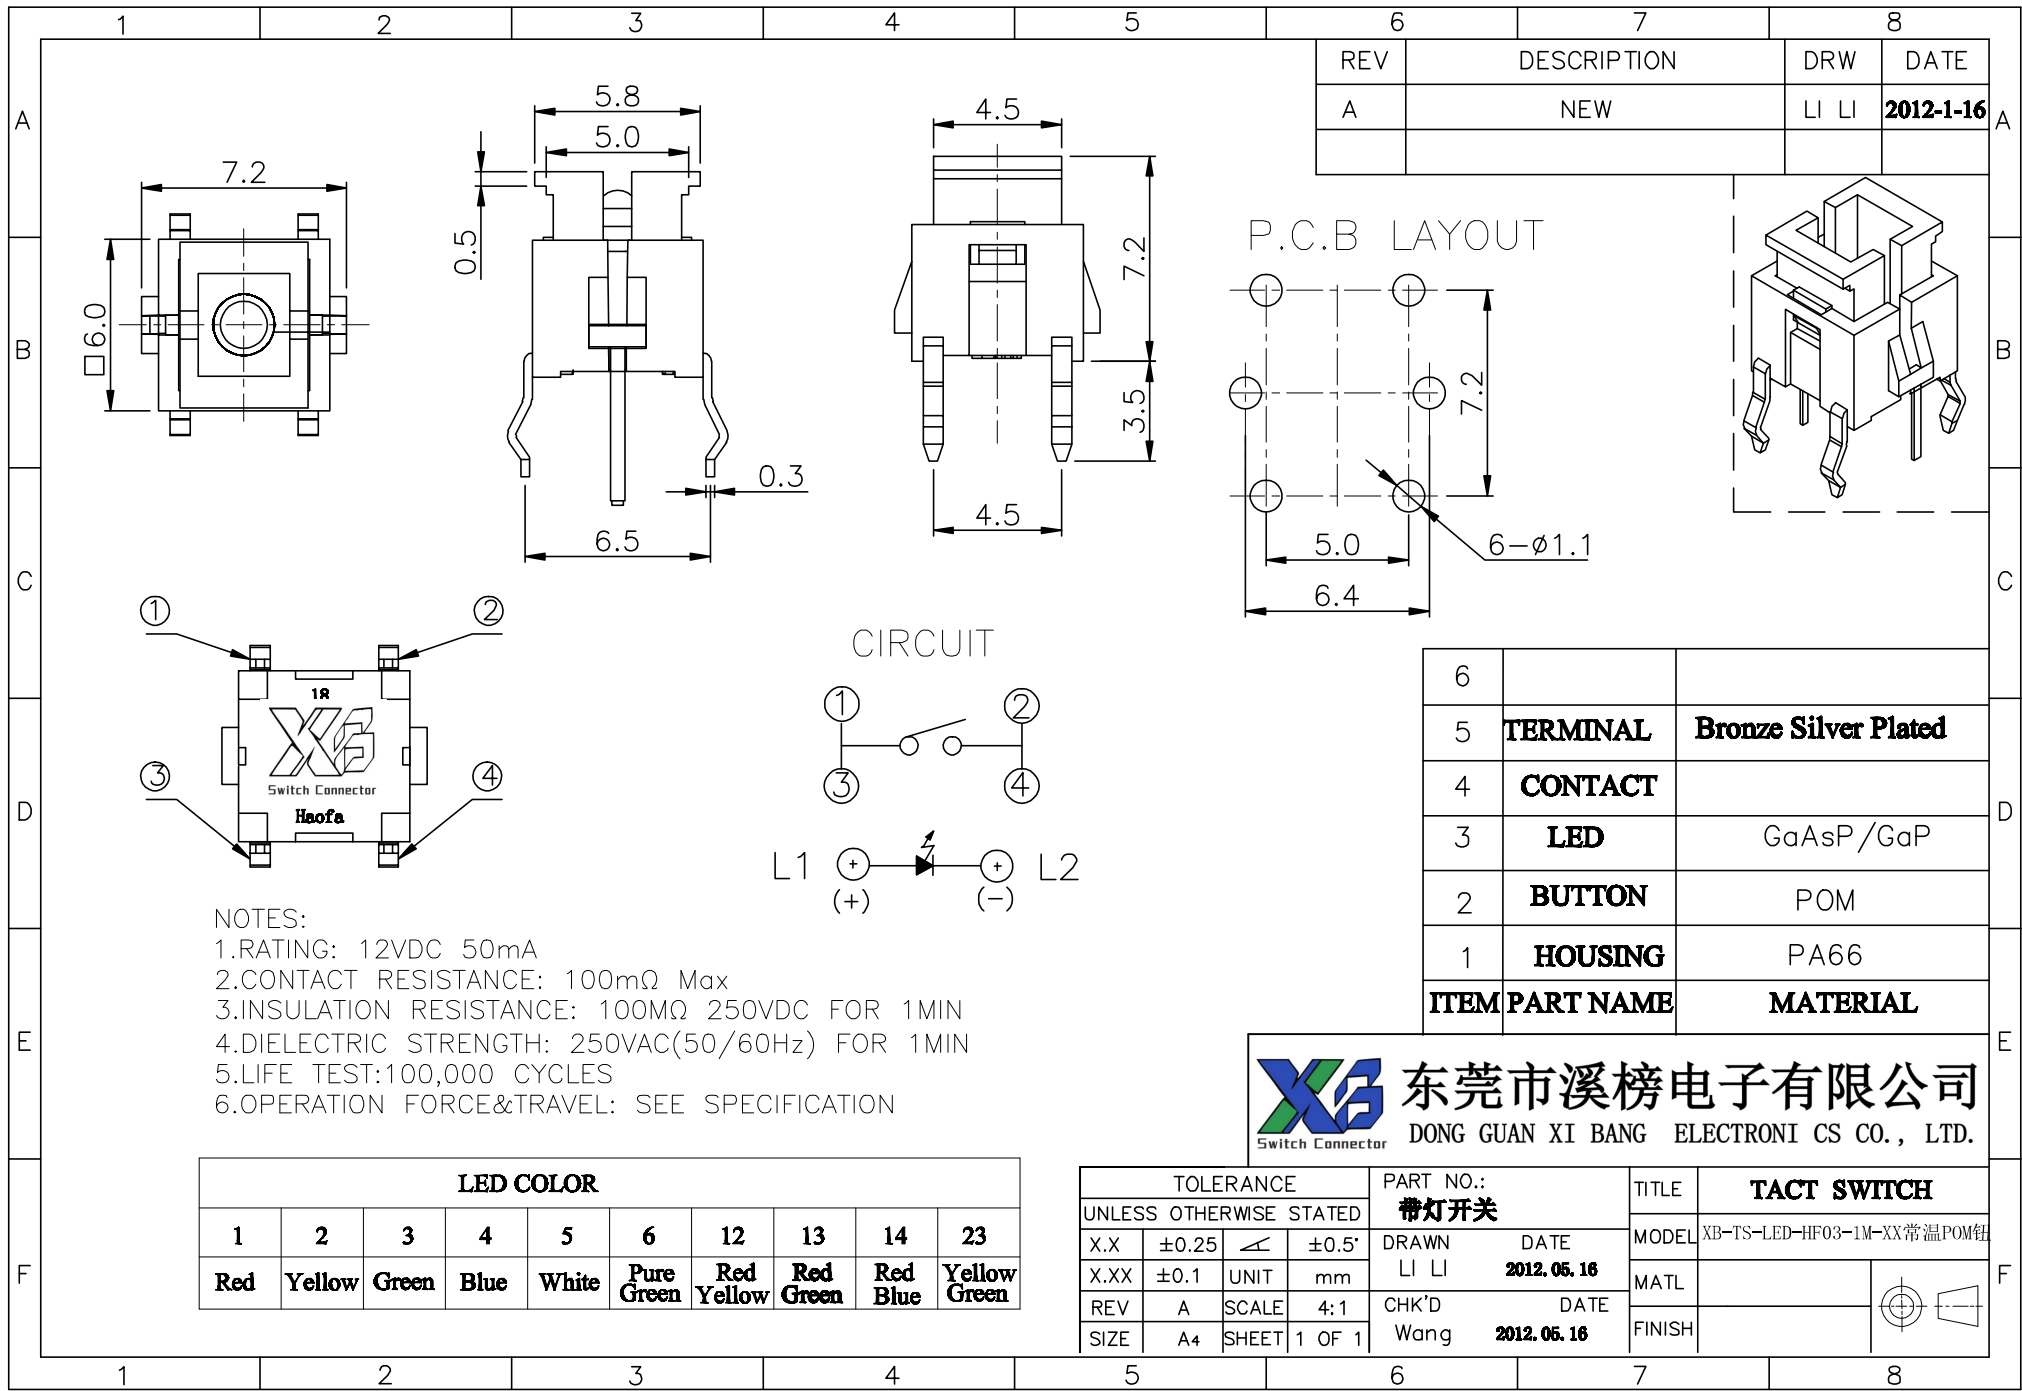

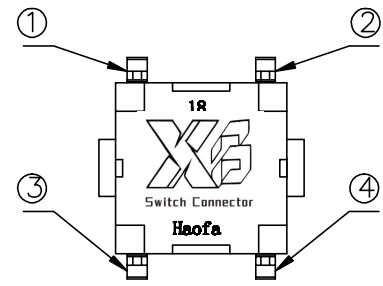




REV	DESCRIPTION	DRW	DATE
A	NEW	LI LI	2012-1-16

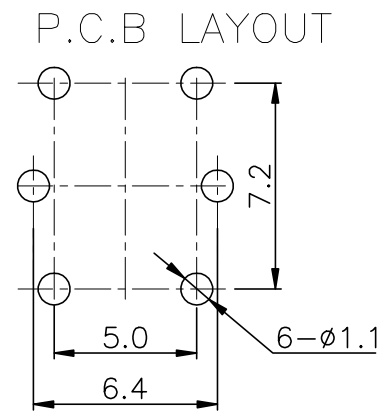

NOTES:
1.RATING: 12VDC 50mA
2.CONTACT RESISTANCE: 100mΩ Max
3.INSULATION RESISTANCE: 100MΩ 250VDC FOR 1MIN
4.DIELECTRIC STRENGTH: 250VAC(50/60Hz) FOR 1MIN
5.LIFE TEST:100,000 CYCLES
6.OPERATION FORCE&TRAVEL: SEE SPECIFICATION

ITEM	PART NAME	MATERIAL
6		
5	TERMINAL	Bronze Silver Plated
4	CONTACT	
3	LED	GaAsP /GaP
2	BUTTON	POM
1	HOUSING	PA66

LED COLOR									
1	2	3	4	5	6	12	13	14	23
Red	Yellow	Green	Blue	White	Pure Green	Red Yellow	Red Green	Red Blue	Yellow Green

TOLERANCE UNLESS OTHERWISE STATED				PART NO.: 带灯开关		TITLE	TACT SWITCH	
X.X	±0.25	∠	±0.5'	DRAWN	DATE	MODEL	XB-TS-LED-HF03-1M-XX常温POM钮	
X.XX	±0.1	UNIT	mm	LI LI	2012.05.16	MATL		
REV	A	SCALE	4:1	CHK'D	DATE	FINISH		
SIZE	A4	SHEET	1 OF 1	Wang	2012.05.16			

XB 东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD.