

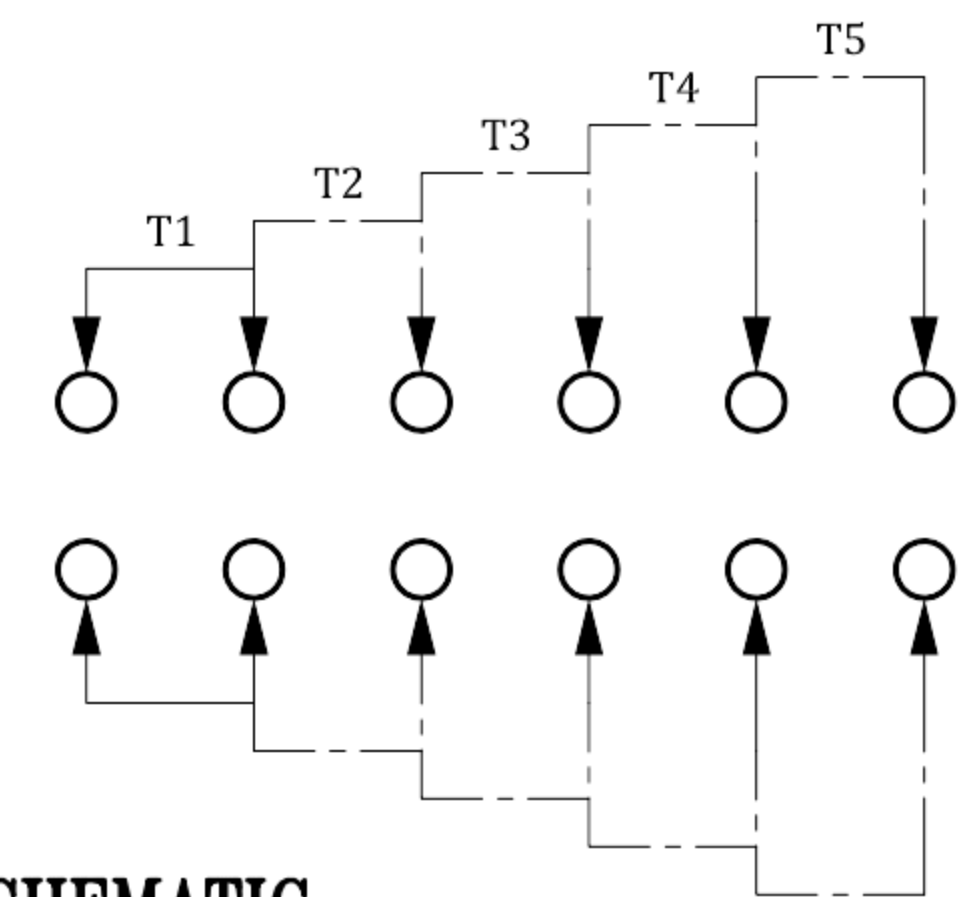
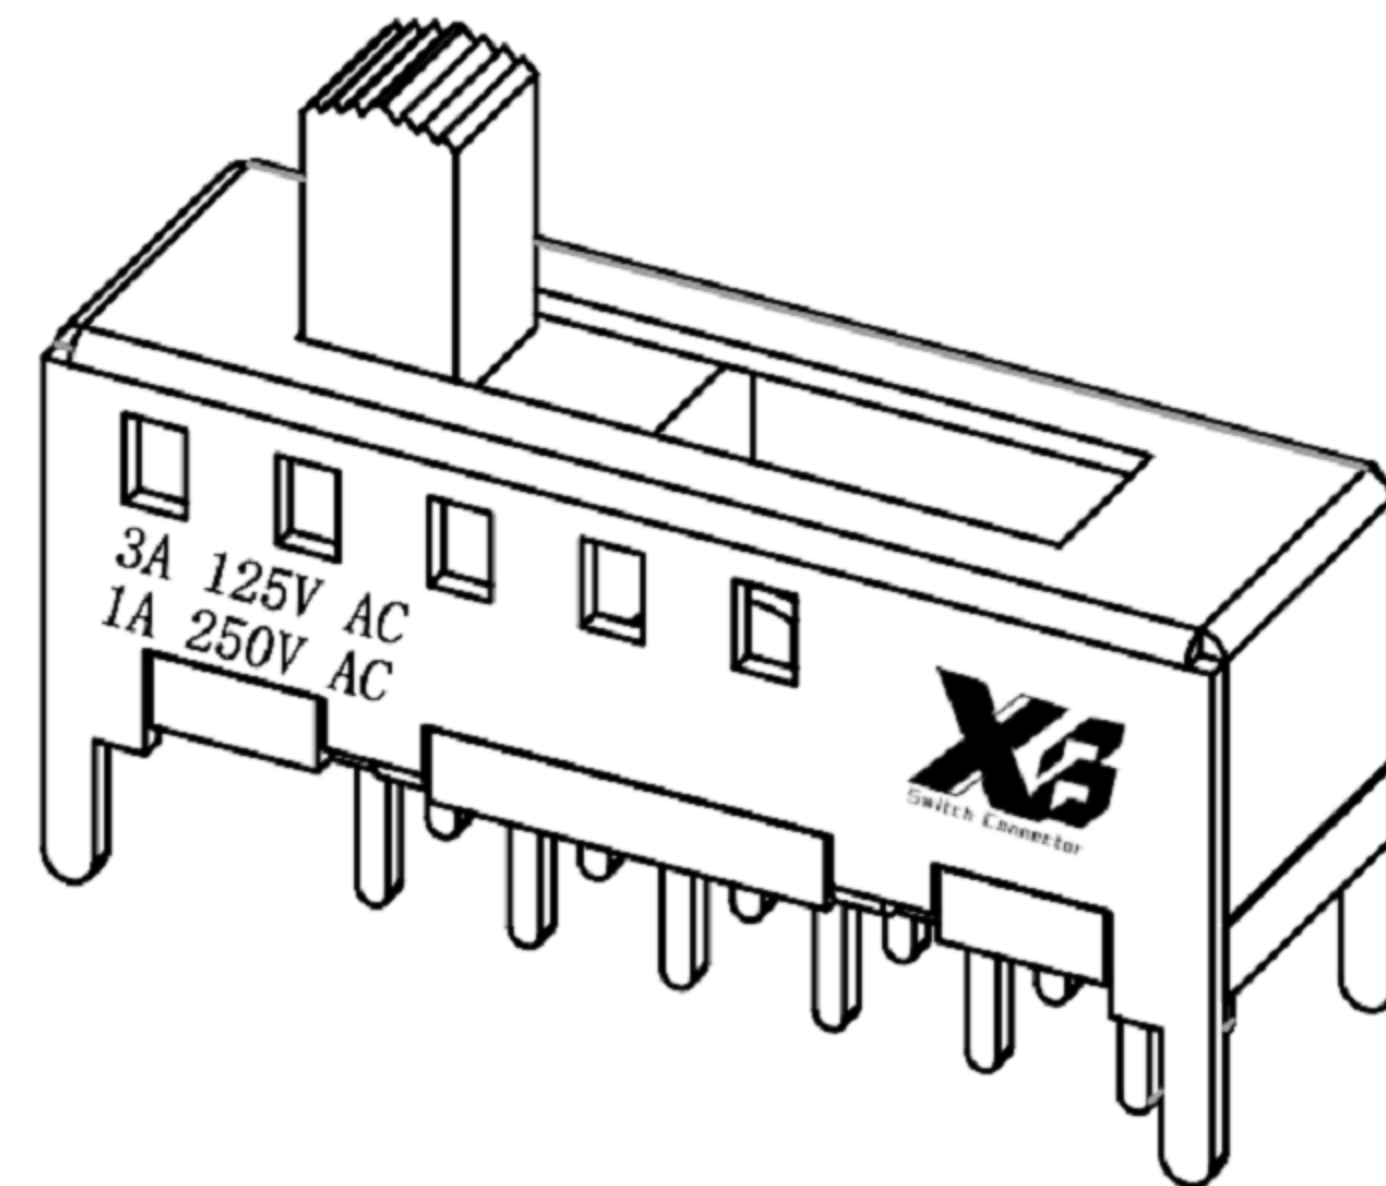
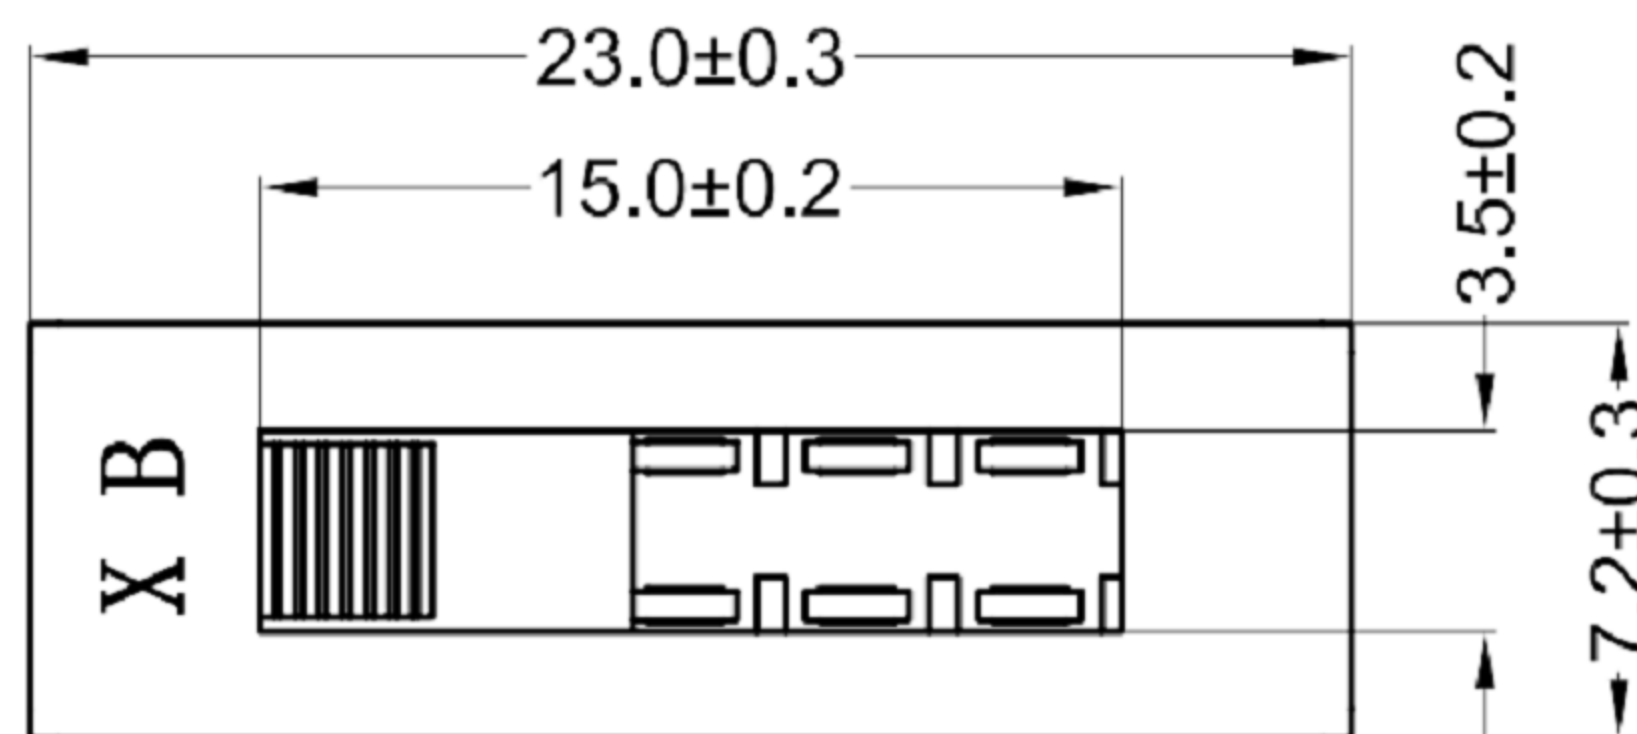
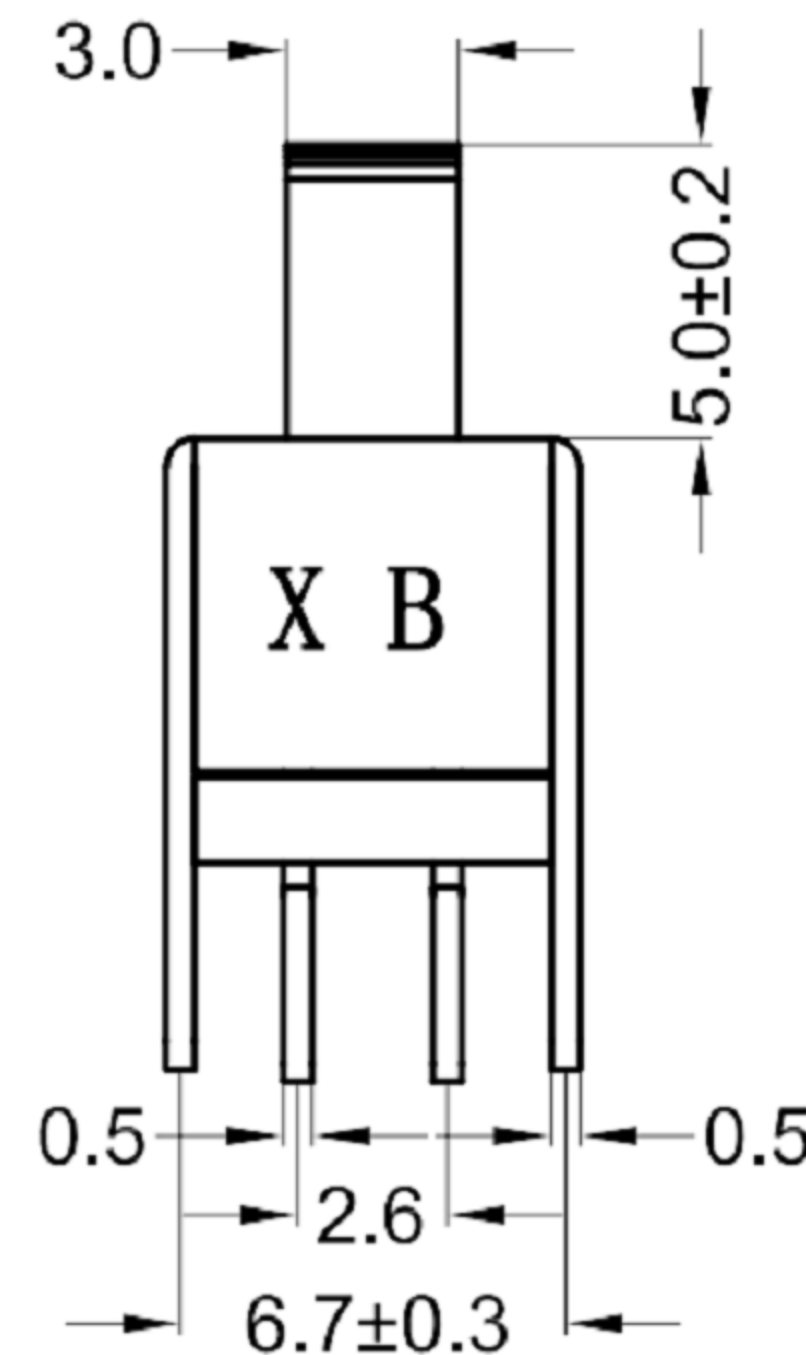


CAD FILE:

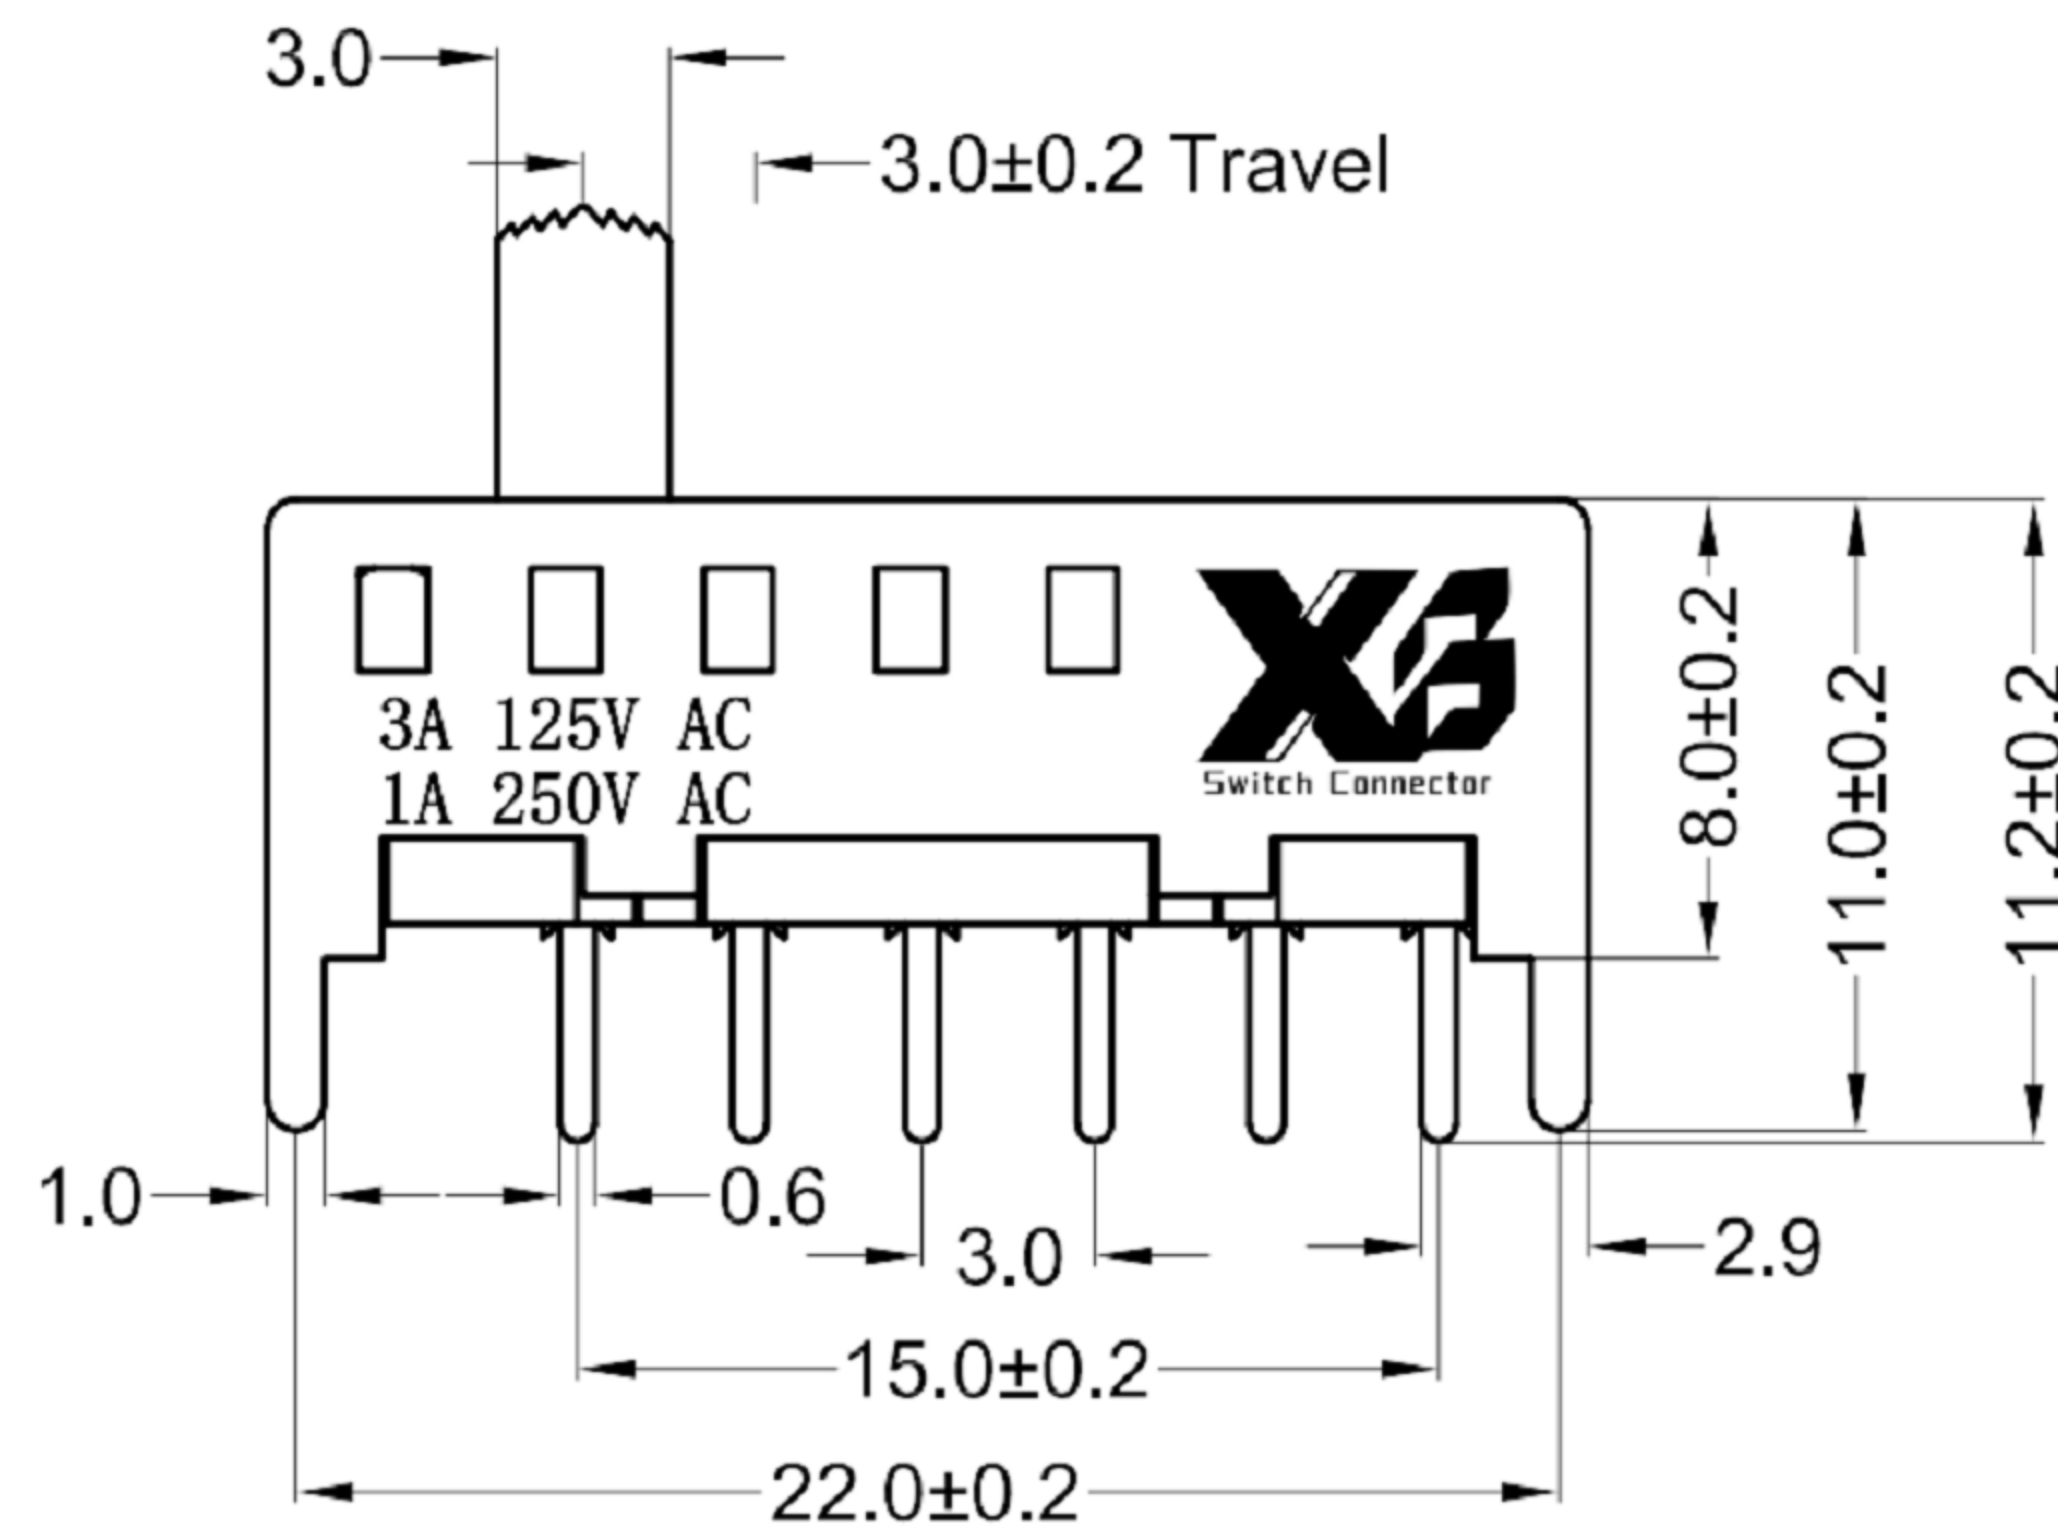

SCHEMATIC

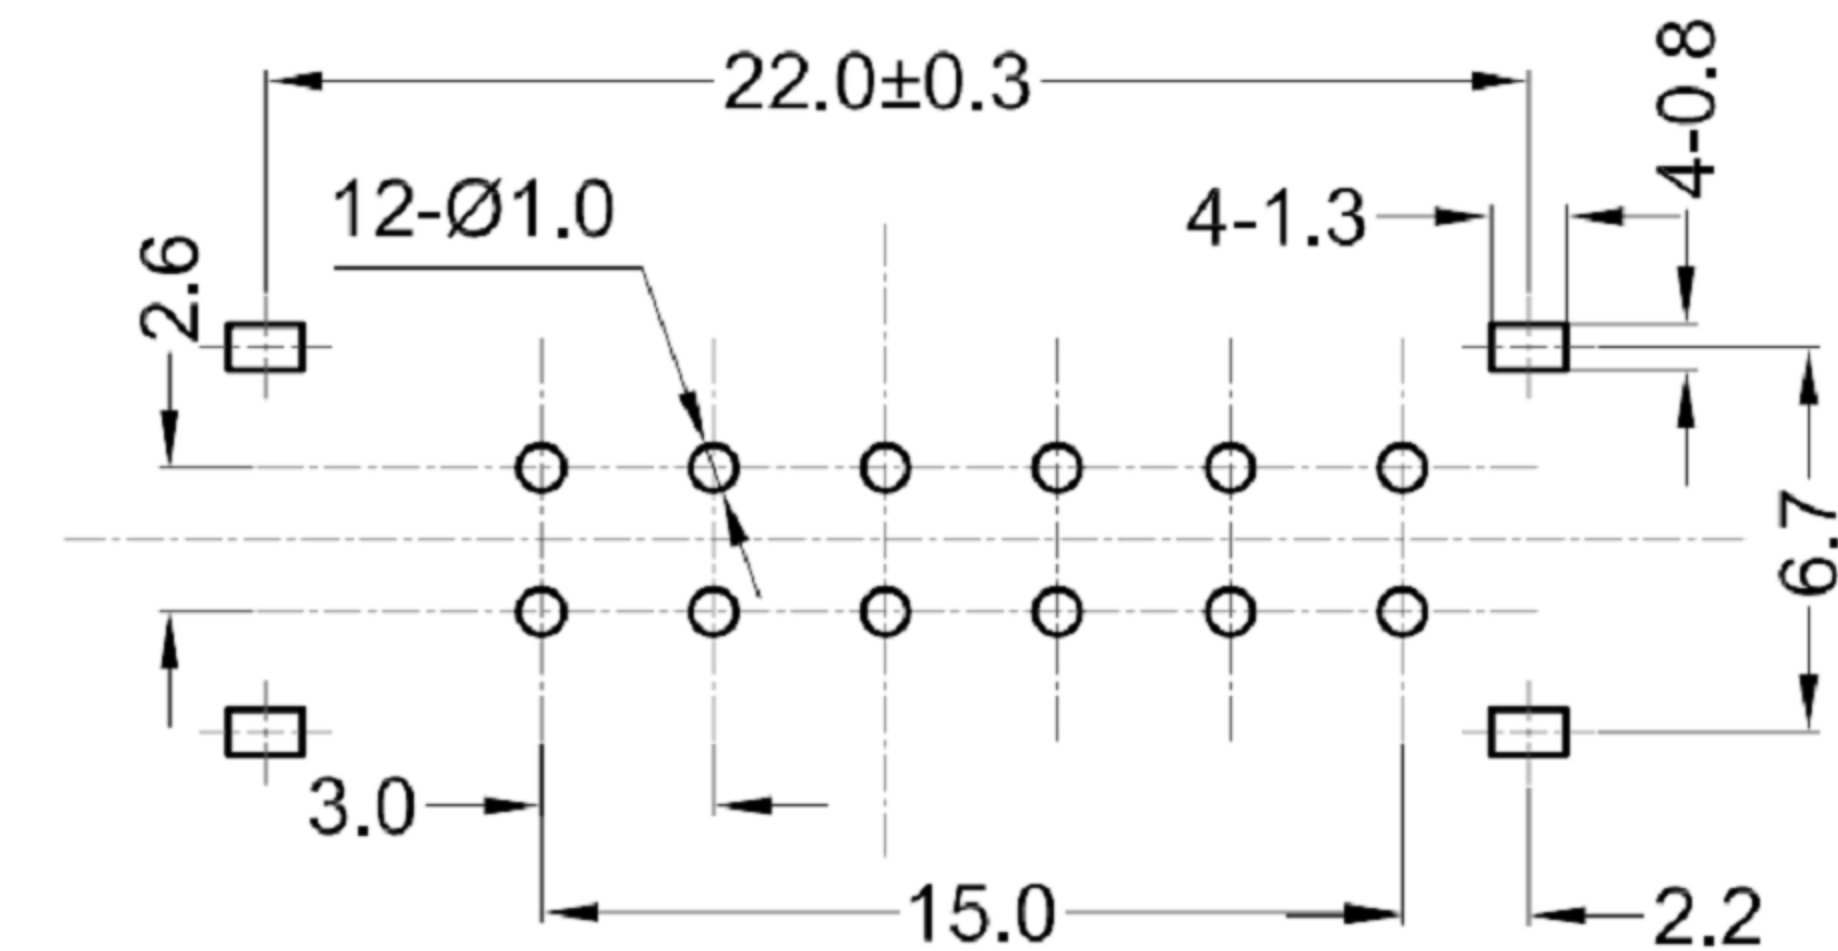

P.C.B LAYOUT
BOTTOM VIEW

规格 Specification:

- 1.型号 Model: XB-SS-H25-2501
- 2.额定值 Rating:3A 125VAC/1A 250VAC
- 2.接触电阻 Contact resistance:≤100 mΩ
- 3.绝缘电阻 Insulation resistance:≥100 MΩ(DC500V/Min)
- 4.使用寿命 Operation life:>5000 cycles(Unloading)
- 5.操作力 Operation force:350±100gf
- 6.所有材料符合Rohs要求 All materials are Rohs compliant

注：“*”表示关键尺寸 (6个)

NO.	PARTS	MATERIALS	Q'TY	FINISH	TOLERANCE UNLESS SPECIFIED	ISSUE	DATE	DESCRIPTIONS OF REVISION	REMARK
8					WITHIN 1.5mm : ±0.1mm	A/0	2024-5-24		
7					OVER 1.5mm : ±0.2mm				
6	SPRING PLATE	SUS304	1	NATURAL					
5	CONTACT CLIP	C5210R	1	Ag CLAD					
4	TERMINAL	C2680R	6	Ag PLATED					
3	BASE	PHENOLIC RESIN	1	NATURAL					
2	FRAME	SPCC	1	Sn PLATED					
1	KNOB	PA66	1	BLACK					
					TITLE : SLIDE SWITCH			UNIT : mm	DRWG NO.:
					MODEL: XB-SS-H25-2501			SCALE: 3:1	
								DWN.	高鹏
								CHK'D	庞东
								APPD.	贺龙飞



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.