

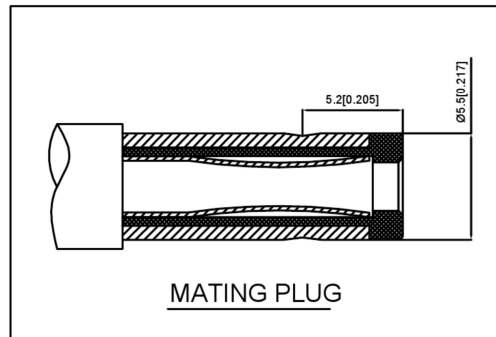



P.C.B LAYOUT

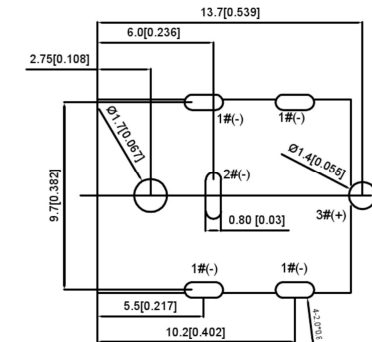





SCHEMATIC



SPECIFICATION

规范

- 1.Rating : DC 20V 10A;
额定值: DC 20V 10A;
- 2.Contact resistance: 0.03Ω;
接触电阻: 0.03Ω;
- 3.Insulation resistance: ≥100MΩ (DC250V)
绝缘电阻: ≥100MΩ (DC250V)
- 4.Withstand voltage:500V AC
耐压: 500V AC
- 5.Insertion and extraction force:5-40N
插拔力: 5-40N
- 6.life test: 5.000 cycles.
寿命试验: 5.000次循环。

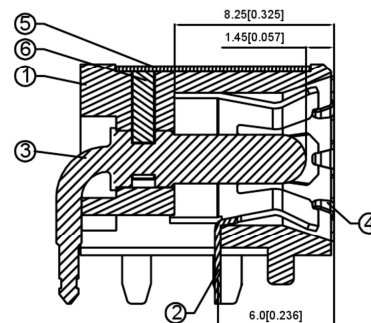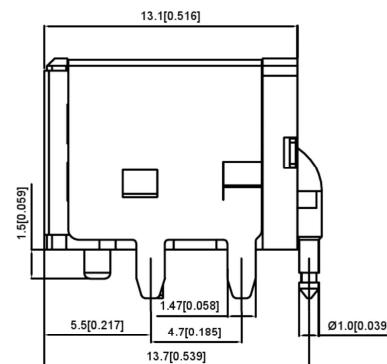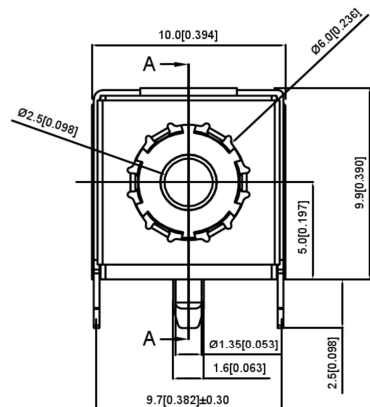

剖面 A-A

							DSND		SCALE: N/A	MODEL TYPE: DC POWER JACK			
				ANGLAR	±5°		DWN		VIEW: 	PART NO.: DC-042C-Z-2.5-A			
				L≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:			
				4<L≤ 16	±0.3		APPD		SIZE: A4				
				16<L≤ 63	±0.4								
				L> 63	±0.5								
REVISIONS					UNSPECIFIED TOLERANCES		DONG GUAN XI BANG ELECTRONIC CO., LTD				WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com												1/1	A0