
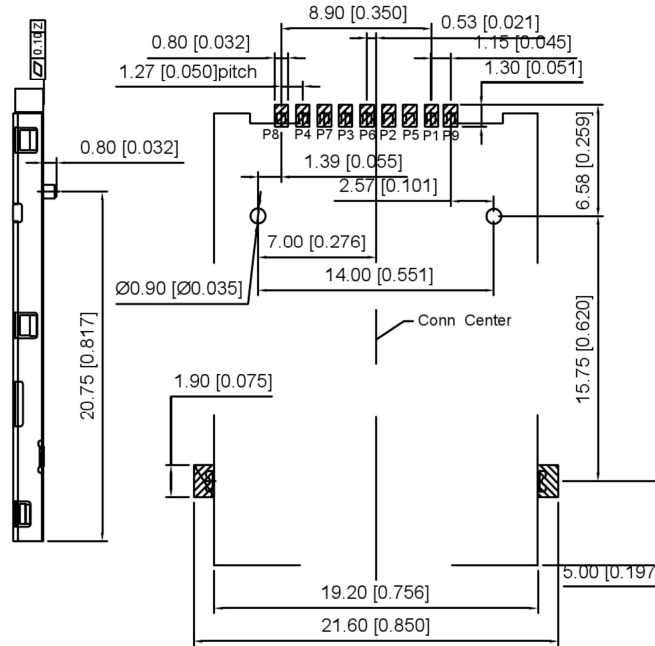
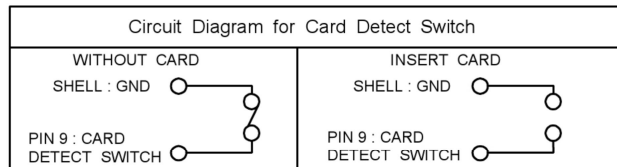
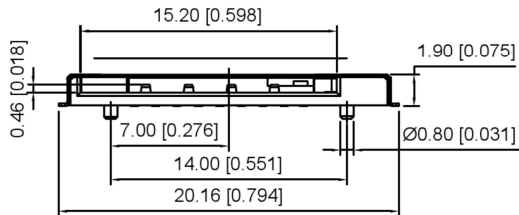


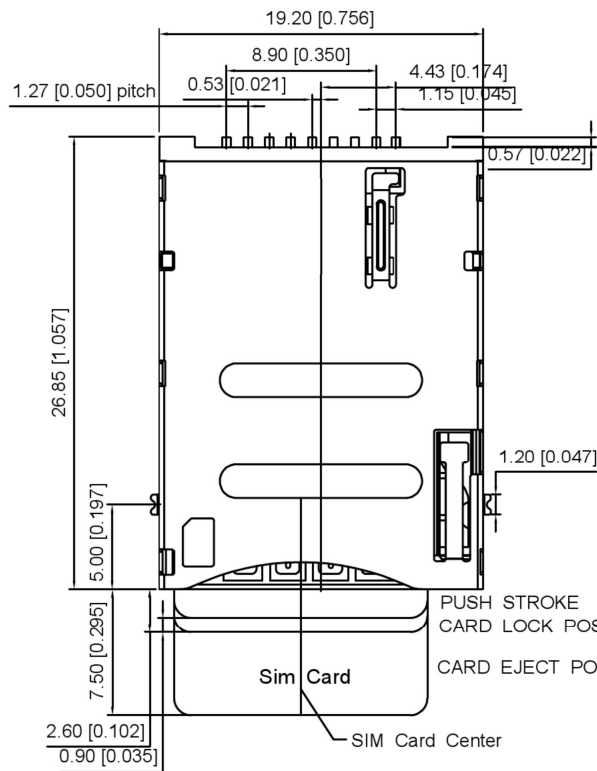

Specification.

*Electrical Characteristics:

Current Rating:1.5A.

Withstanding Voltage:AC500V r.m.s.

Insulation Resistance:1000Megohms


Minimum at DC 500V

Contact Resistance:100Miliohms Maximum.

*Mechanical Characteristics:

Mating Cyeles:5000 Insertions

PART NUMBER INFORMATION

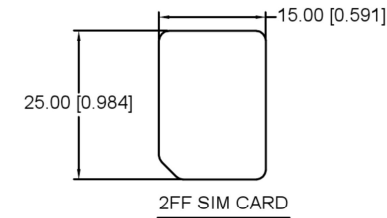

Connector terminal NO.	Pin NO.
Pin 1	VCC:PWR signal and GND
Pin 2	RST:Reset signal
Pin 3	CLK:Clocking signal
Pin 4	RESERVED
Pin 5	GND:PWR signal and GND
Pin 6	VCC:Porgramming Voltage
Pin 7	I/O:Serial date input/output
Pin 8	RESERVED

ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING
③	Shell	1	SUS	
②	Terminal	9	COPPER ALLOY	
①	Housing	1	LCP UL 94V-0	BLACK

REVISIONS					UNSPECIFIED TOLERANCES		DSND		SCALE: N/A		MODEL TYPE:	
											SIM CARD CONN	
							DWN		VIEW:		PART NO.:	
							CHKD		UNIT: mm/in		XKSIM-220	
							APPD		SIZE: A4		DWG NO.:	
											WEIGHT	
											SHEET	
											REVISION	
											1/1	
											A0	

