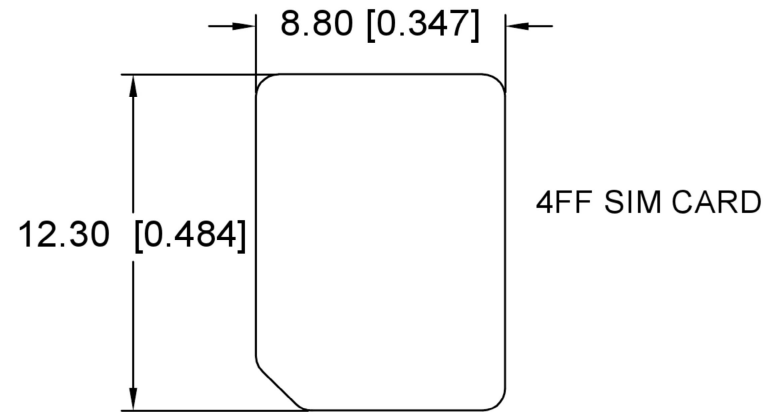
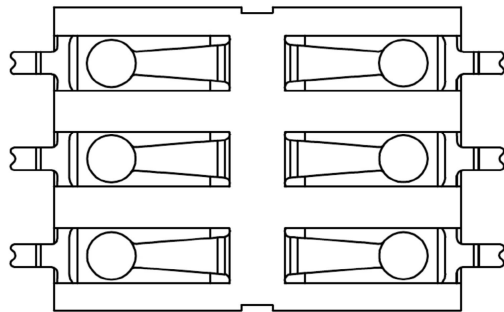


NOTE:

1.ELECTRICAL CHARACTERISTICS

1-1. CURRENT RATE: 1.0A

1-2. CONTACT RESISTANCE: 100 Milliohms MAX

1-3. INSULATION RESISTANCE: 1,000 Megohms MIN.

1-4. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.

2. RoHS 2002/95/EC COMPLIANT.



②	Terminal	6	COPPER ALLOY	
①	Housing	1	HI-TEMP.PLASIC UL 94V-0	BLACK
ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING

							DSND		SCALE: N/A	MODEL TYPE: SIM CARD CONN				
				ANGLAR	±5°		DWN		VIEW: 	PART NO.: XKSIM-005				
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:				
				4<L ≤ 16	±0.3		APPD		SIZE: A4					
				16<L ≤ 63	±0.4									
				L > 63	±0.5									
				DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES							
REVISIONS												WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com													1/1	A0