
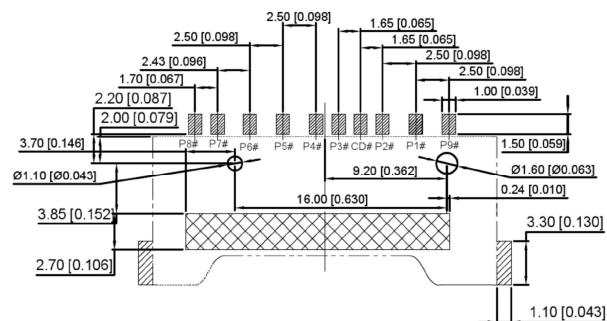
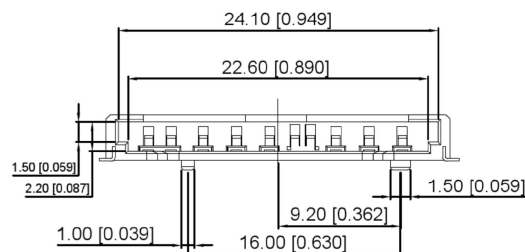

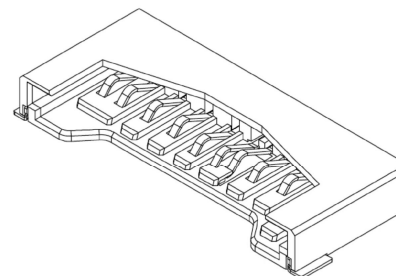




Recommended P.C.B Layout(Top Side)
Tolerance: ± 0.05

 Pad Area

 Keep Out Area

PIN#	NAME	DESCRIPTION
1	DAT3	DATA LINE BIT3
2	CMD	COMMAND/RESPONSE
3	VSS1	SUPPLY VOLTAGE GROUND
4	VDD1	SUPPLY VOLTAGE
5	CLK	CLOCK
6	VSS2	SUPPLY VOLTAGE GROUND
7	DAT0	DATA LINE BIT0
8	DAT1	DATA LINE BIT1
9	DAT2	DATA LINE BIT2
10	CD	CARD DETECT
11	WP	WRITE PROTECT

- 1.All Dimensions are in millimeters
- 2.Operation voltage: 100 VAC max.
- 3.current rating: 1 Amps max.
- 4.Contact resistance: 100m ohms max
- 5.Insulation resistance: 1000M ohms min. 500 VDC
- 6.Dielectric withstanding voltage: 500 VAC / 1minute
- 7.Operatng Temperature: -20°C to +60°C
- 8.Storage Temperature:-40°C to +70°C
- 9.Material:
HOUSING: HI-TEMP.PLASTIC ;BLACK ; UL 94V-0
CONTACT: COPPER ALLOY(Y=0.20mm)

							DSND		SCALE: N/A	MODEL TYPE: SIM CARD CONN			
				ANGLAR	±5°		DWN		VIEW: 	PART NO.: XKSD-013			
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:			
				4<L ≤ 16	±0.3		APPD		SIZE: A4				
				16<L ≤ 63	±0.4								
				L > 63	±0.5								
REVISIONS						UNSPECIFIED TOLERANCES					WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxdz.com www.xbswitch.com								DONG GUAN XI BANG ELECTRONIC CO., LTD				1/1	A0