




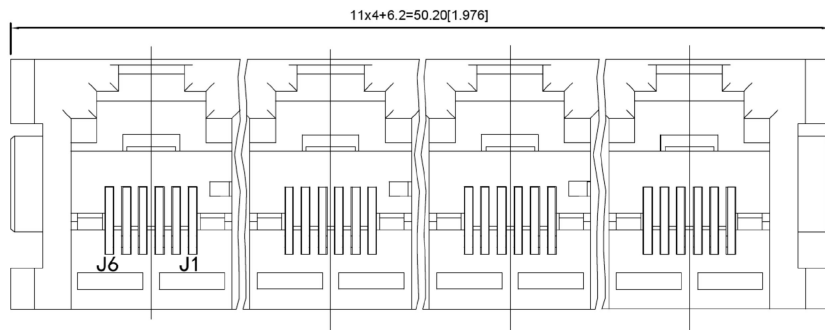


FRONT VIEW




RIGHT SIDE VIEW

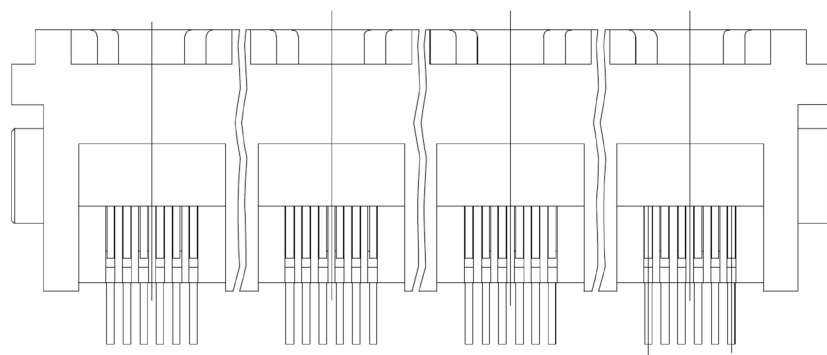

BOTTOM VIEW

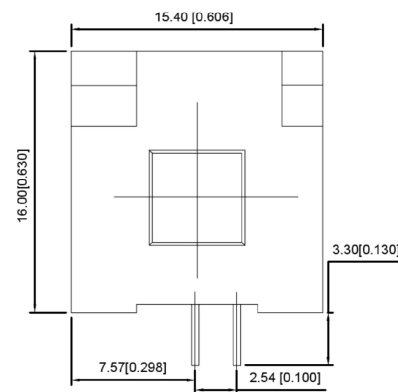

RIGHT SIDE VIEW

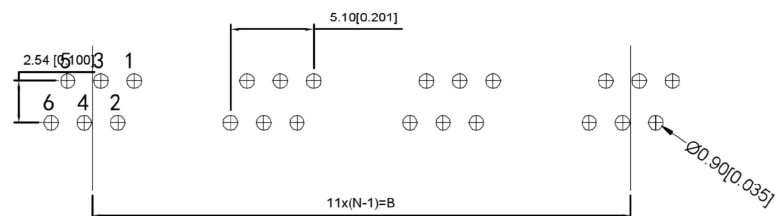

RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE

MATERIAL 材料:

HOUSING 外壳: PBT, UL94V-0, BLACK.

TERMINAL 端子: PHOSPHOR BRONZE $\varnothing=0.46\text{MM}$, GOLD PLATING

IRON FEET 铁脚板: IRON.

MECHANICAL 机械:

DURABILITY 耐用性: 750 CYCLES MIN, 12.5MM/MINUTE.

INSERTION FORCE 插入力: 2.2KG.F MAX

RETENTION STRENGTH 保持力: 7.7KG.F BETWEEN JACK AND PLUG.

OPERATING TEMPERATURE 工作温度: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$.

STORAGE TEMPERATURE 储存温度: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$.

ALL CRITICAL DIMENSIONS WITH "MM"

ELECTRICAL 电气:

VOLTAGE 电压: 125 VOLTS AC.

CURRENT RATING 电流额定值: 1.5AMP.

DIELECTRIC STRENGTH 介电强度: 1000 VAC RMS 50HZ OR 60HZ, 1 MIN

INSULATION RESISTANCE 绝缘电阻: 500 MEGA OHMS MIN. INITIAL
AFTER 500V DC FOR 1 MINUTE.

CONTACT RESISTANCE 接触电阻: SINGLE TERMINAL 30 MILLIOHMS MAX.
INITIAL 50 MILLIOHMS MAX. AFTER
DURABILITY TEST.



							DSND		SCALE: N/A	MODEL TYPE: RJ JACK		
							DWN		VIEW: 	PART NO.:		
							CHKD		UNIT: mm/in	DWG NO.:		
							APPD		SIZE: A4	X06CHIWA1DY1057		
							DONG GUAN XI BANG ELECTRONIC CO., LTD			WEIGHT	SHEET	REVISION
										1/1	A0	