
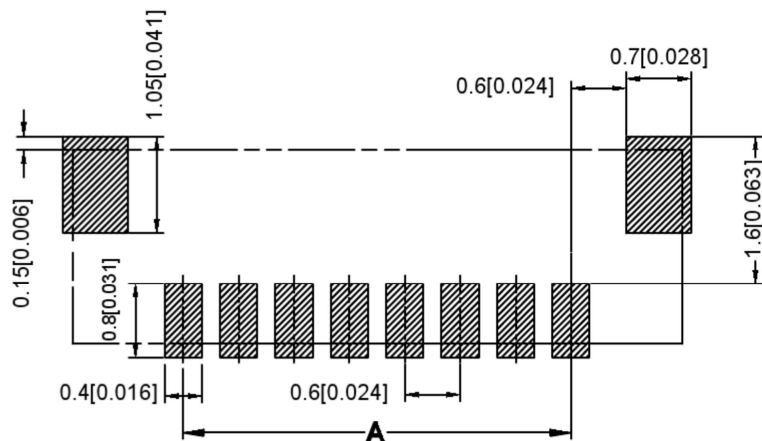
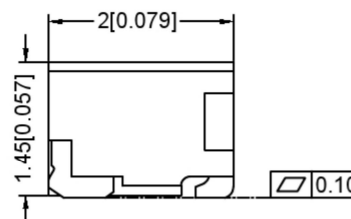
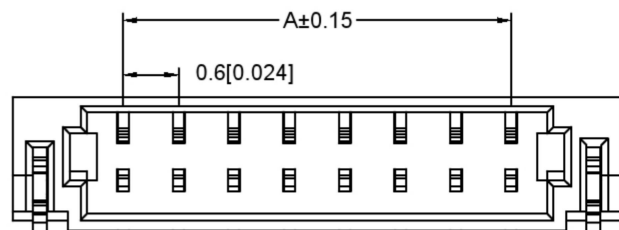
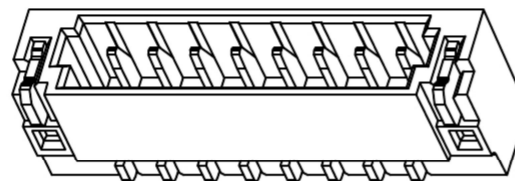


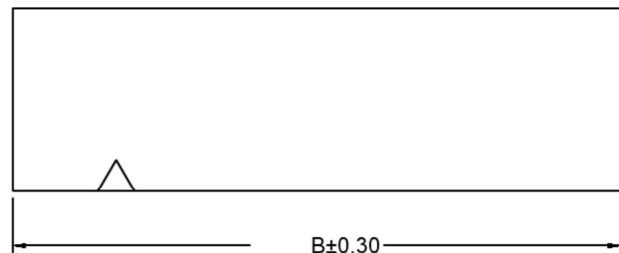

Recommended P.C.B Layout

Specifications:

规格:

Voltage rating:30V AC/DC

额定电压: 30V AC/DC

Current rating: 0.2A AC/DC

额定电流: 0.2A AC/DC

Withstanding voltage:200V AC/minute

耐压电压: 200V AC/分钟

Temperature range:-25℃~+85℃

温度范围: -25℃~+85℃

Insulation resistance:≥100MΩ

绝缘电阻: ≥100MΩ

Contact resistance: ≤30mΩ

接触电阻: ≤30mΩ

X0600 W R S - XX - LP V01 HF

① ②③④ ⑤ ⑥ ⑦ ⑧

① Series No.

② Category: W-wafer

③ Welding Board Angle: R-90°

④ Row No.-Pin No.: XX-Single row

⑤ Material: LP-LCP 94V-0

⑥ Planting Category : V01-All Gold Flash

⑦ Plug the Pin & Special N0.:HF-Halogen Free

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
2	0.60	3.00	12	6.60	9.00
3	1.20	3.60	13	7.20	9.60
4	1.80	4.20	14	7.80	10.20
5	2.40	4.80	15	8.40	10.80
6	3.00	5.40	16	9.00	11.40
7	3.60	6.00	17	9.60	12.00
8	4.20	6.60	18	10.20	12.60
9	4.80	7.20	19	10.80	13.20
10	5.40	7.80	20	11.40	13.80
11	6.00	8.40	22	12.60	15.00

X0600WRS-XX-LPV01HF	LCP UL 94V-0 (Halogen Free)	Phosphor Bronze	Gold-Flash	Brass	Gold-Flash	X0600H
PART NO	Material	Material(Pin)	Finish(Pin)	Material (Solder Tabs)	Finish (Solder Tabs)	

							DSND		SCALE: N/A	MODEL TYPE:		
				ANGULAR	±5°		DWN		VIEW: 	PART NO.:		
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	X0600WRS-XX-LPV01HF		
				4<L ≤ 16	±0.3		APPD		SIZE: A4	DWG NO.:		
				16<L ≤ 63	±0.4							
				L > 63	±0.5							
REVISIONS						UNSPECIFIED TOLERANCES						
www.alpsr.com www.gdxjdz.com www.xbswitch.com						DONG GUAN XI BANG ELECTRONIC CO., LTD		WEIGHT		SHEET	REVISION	
										1/1	A0	