



Product NO. XB-806-0010

REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2012/04/27	John kine
B				

Specifications:

IMPEDANCE: 50 Ohms

Frequency range: 0~3GHz



VSWR: 1.3MAX

Working voltage: 500V rms @ sea level

Insulation resistance: 5000 Ohms min

Temperature range: -65°C TO +165°C

Relative temperature: ≤95% (40°C ± 2°C)

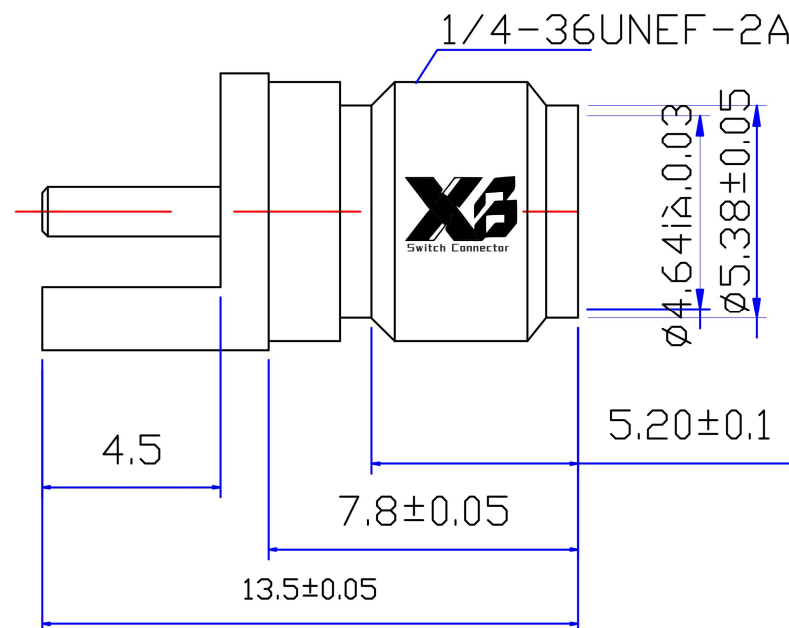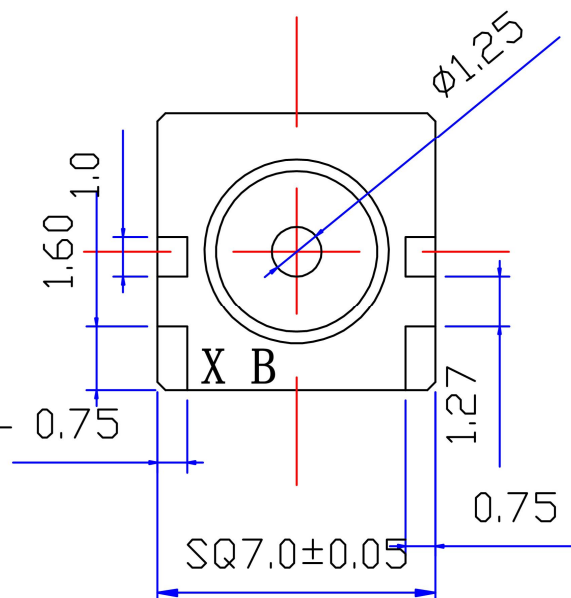

1	Body	Brass	AU: 1-3u"	NOTE:	
2	Insulator	TEFLON	None		
3	Center contact	Brass	AU: 5u"		
4					
5				DRAWN Zelin. Zhang	2012/04/ 27
6					
7				CHECKED	
8					
9				APPROVALS	
10					
NO	Component Number	Material	Finish	John Kine	27/04.2012

Tolerance	X.	±0.15
	X.X	±0.10
	X.XX	±0.05
	Angular	±5°
View		
UNIT	MM	
SCALE	1:1	

XB 东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD

Name: SMA Jack PCB MOUNT			
SIZE A	Product NO. XB-806-0010	REV B	
DateTime	2012/04/27	CAD FILE	D/company drawings/BD
SHEET: 1 OF 1			