


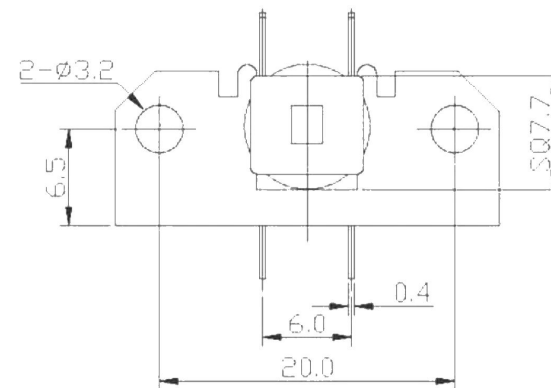
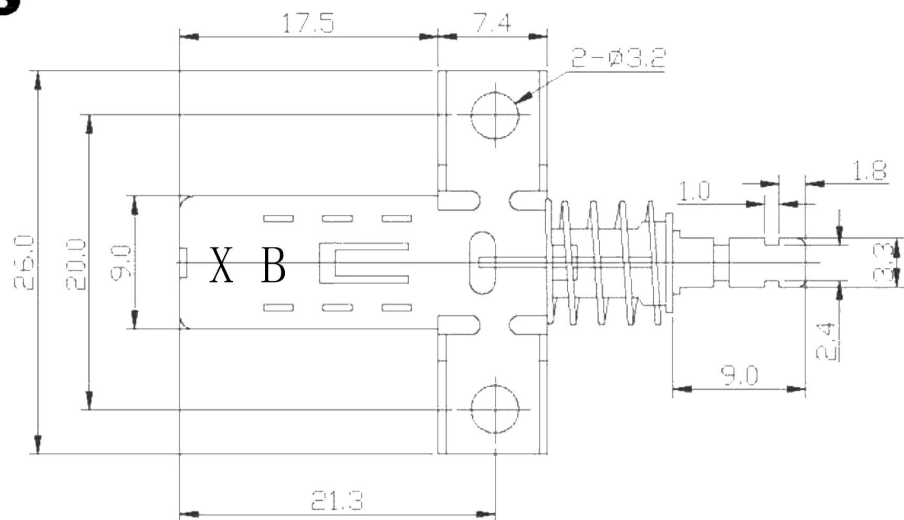


ROHS



SCHEMATIC

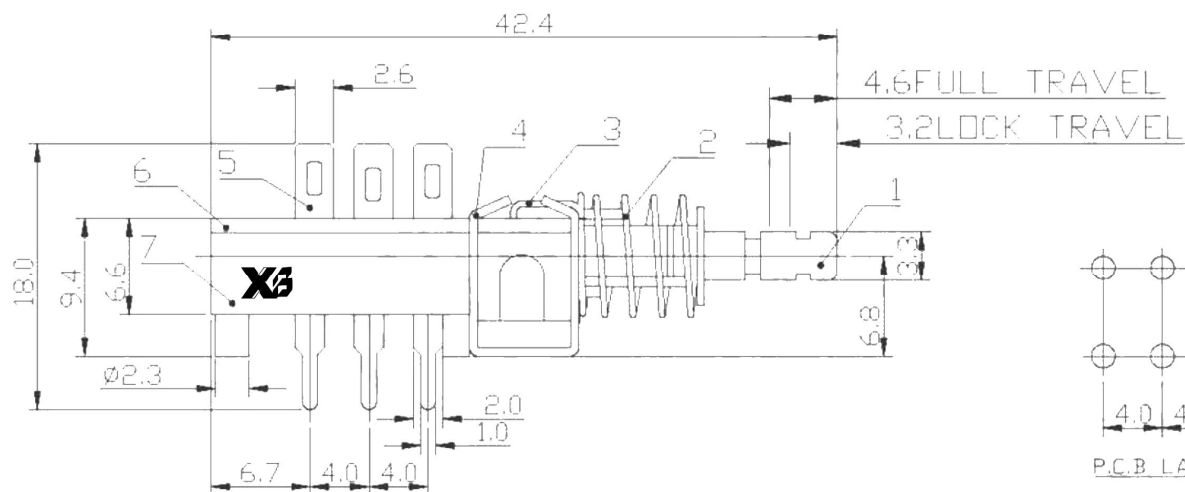

ITEM: PERFORMANCE

Title: PUSH BUTTOMN SWICH

Model: XB-PBS-22H03

Rating: 0.3A 0.5A 12V 30V DC

Function: 2P2T

Timing: Non-shorting

ContactResistance(mohms):50mΩ max

Insulation Resistanc(Mohms):100MΩ min at 500V DC

Dielectric Strength(V):AC 500V for 1 min

LifeTest:10,000 Cycles



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : PUSH BUTTON SWITCH

MODEL : PBS22H03-F18 (W025)



TOLERANCE
≤ 5mm±0.2
> 5mm±0.3

ANGLE TOL
±2°

NO.	PART NAME	MATERIAL	QTY.	FINISHING
8	CONTACT CLIP	BRASS STRIP	2	Ag PLATED
7	CASE	PC	1	BLACK
6	COVER	NYLON	1	BLACK
5	TERMINAL	BRASS STRIP	6	Ag PLATED
4	FRAME	IRON STRIP	1	Ni PLATED
3	CAM STICK	STEEL WIRE	1	Ni PLATED
2	SPRING	STEEL WIRE	3	NATURE
1	KNOB	POM	1	WHITE

UNIT :	MM	DWN.		DATE	
SCALE :	2:1	CHK'D		DATE	
VERSION	01	APPD.		DATE	